

(19)



(11)

EP 3 399 685 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

07.11.2018 Bulletin 2018/45

(51) Int Cl.:

H04L 1/18 ^(2006.01)**H04W 72/04** ^(2009.01)**H04W 4/00** ^(2018.01)**H04L 5/00** ^(2006.01)**H04L 27/26** ^(2006.01)**H04J 11/00** ^(2006.01)**H04B 7/26** ^(2006.01)**H04L 1/08** ^(2006.01)**H04L 1/12** ^(2006.01)(21) Application number: **18179299.5**(22) Date of filing: **14.01.2014**

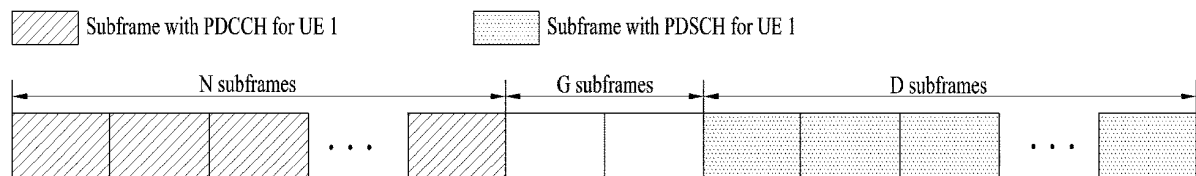
(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**(30) Priority: **14.01.2013 US 201361752444 P****10.04.2013 US 201361810678 P****12.05.2013 US 201361822416 P****06.08.2013 US 201361862518 P****27.09.2013 US 201361883214 P****04.10.2013 US 201361886673 P**(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:**17153602.2 / 3 179 660****14737787.3 / 2 919 402**(71) Applicant: **LG Electronics Inc.****Yeongdeungpo-gu****Seoul, 07336 (KR)**

(72) Inventors:

• **YOU, Hyangsun**
Seoul 137-893 (KR)• **SEO, Dongyoun**
Seoul 137-893 (KR)• **YI, Yunjung**
Seoul 137-893 (KR)• **AHN, Joonkui**
Seoul 137-893 (KR)• **YANG, Suckchel**
Seoul 137-893 (KR)(74) Representative: **Cabinet Plasseraud****66, rue de la Chaussée d'Antin****75440 Paris Cedex 09 (FR)**Remarks:This application was filed on 22-06-2018 as a
divisional application to the application mentioned
under INID code 62.(54) **METHOD AND USER EQUIPMENT FOR RECEIVING DOWNLINK SIGNAL AND METHOD AND
BASE STATION FOR TRANSMITTING DOWNLINK SIGNAL**

(57) The present invention provides: a base station for repeatedly transmitting a physical downlink control channel (PDCCH) during a first subframe bundle comprising a plurality of subframes, and transmitting a PDSCH related to the PDCCH; and user equipment for receiving the PDCCH and the PDSCH. The PDSCH can be transmitted to the user equipment starting from subframe $n+k$, which is the k^{th} subframe after the last subframe $n-1$ in the first subframe bundle, wherein k is an integer bigger than 0. The first subframe bundle may begin from a predetermined or fixed position.

FIG. 11

(a)

EP 3 399 685 A1