
MASSINI INDUSTRIES

MIAL ADVANCED INDUSTRIAL TECHNOLOGIES



Tubular Chain Conveyor

www.mialtecno.com

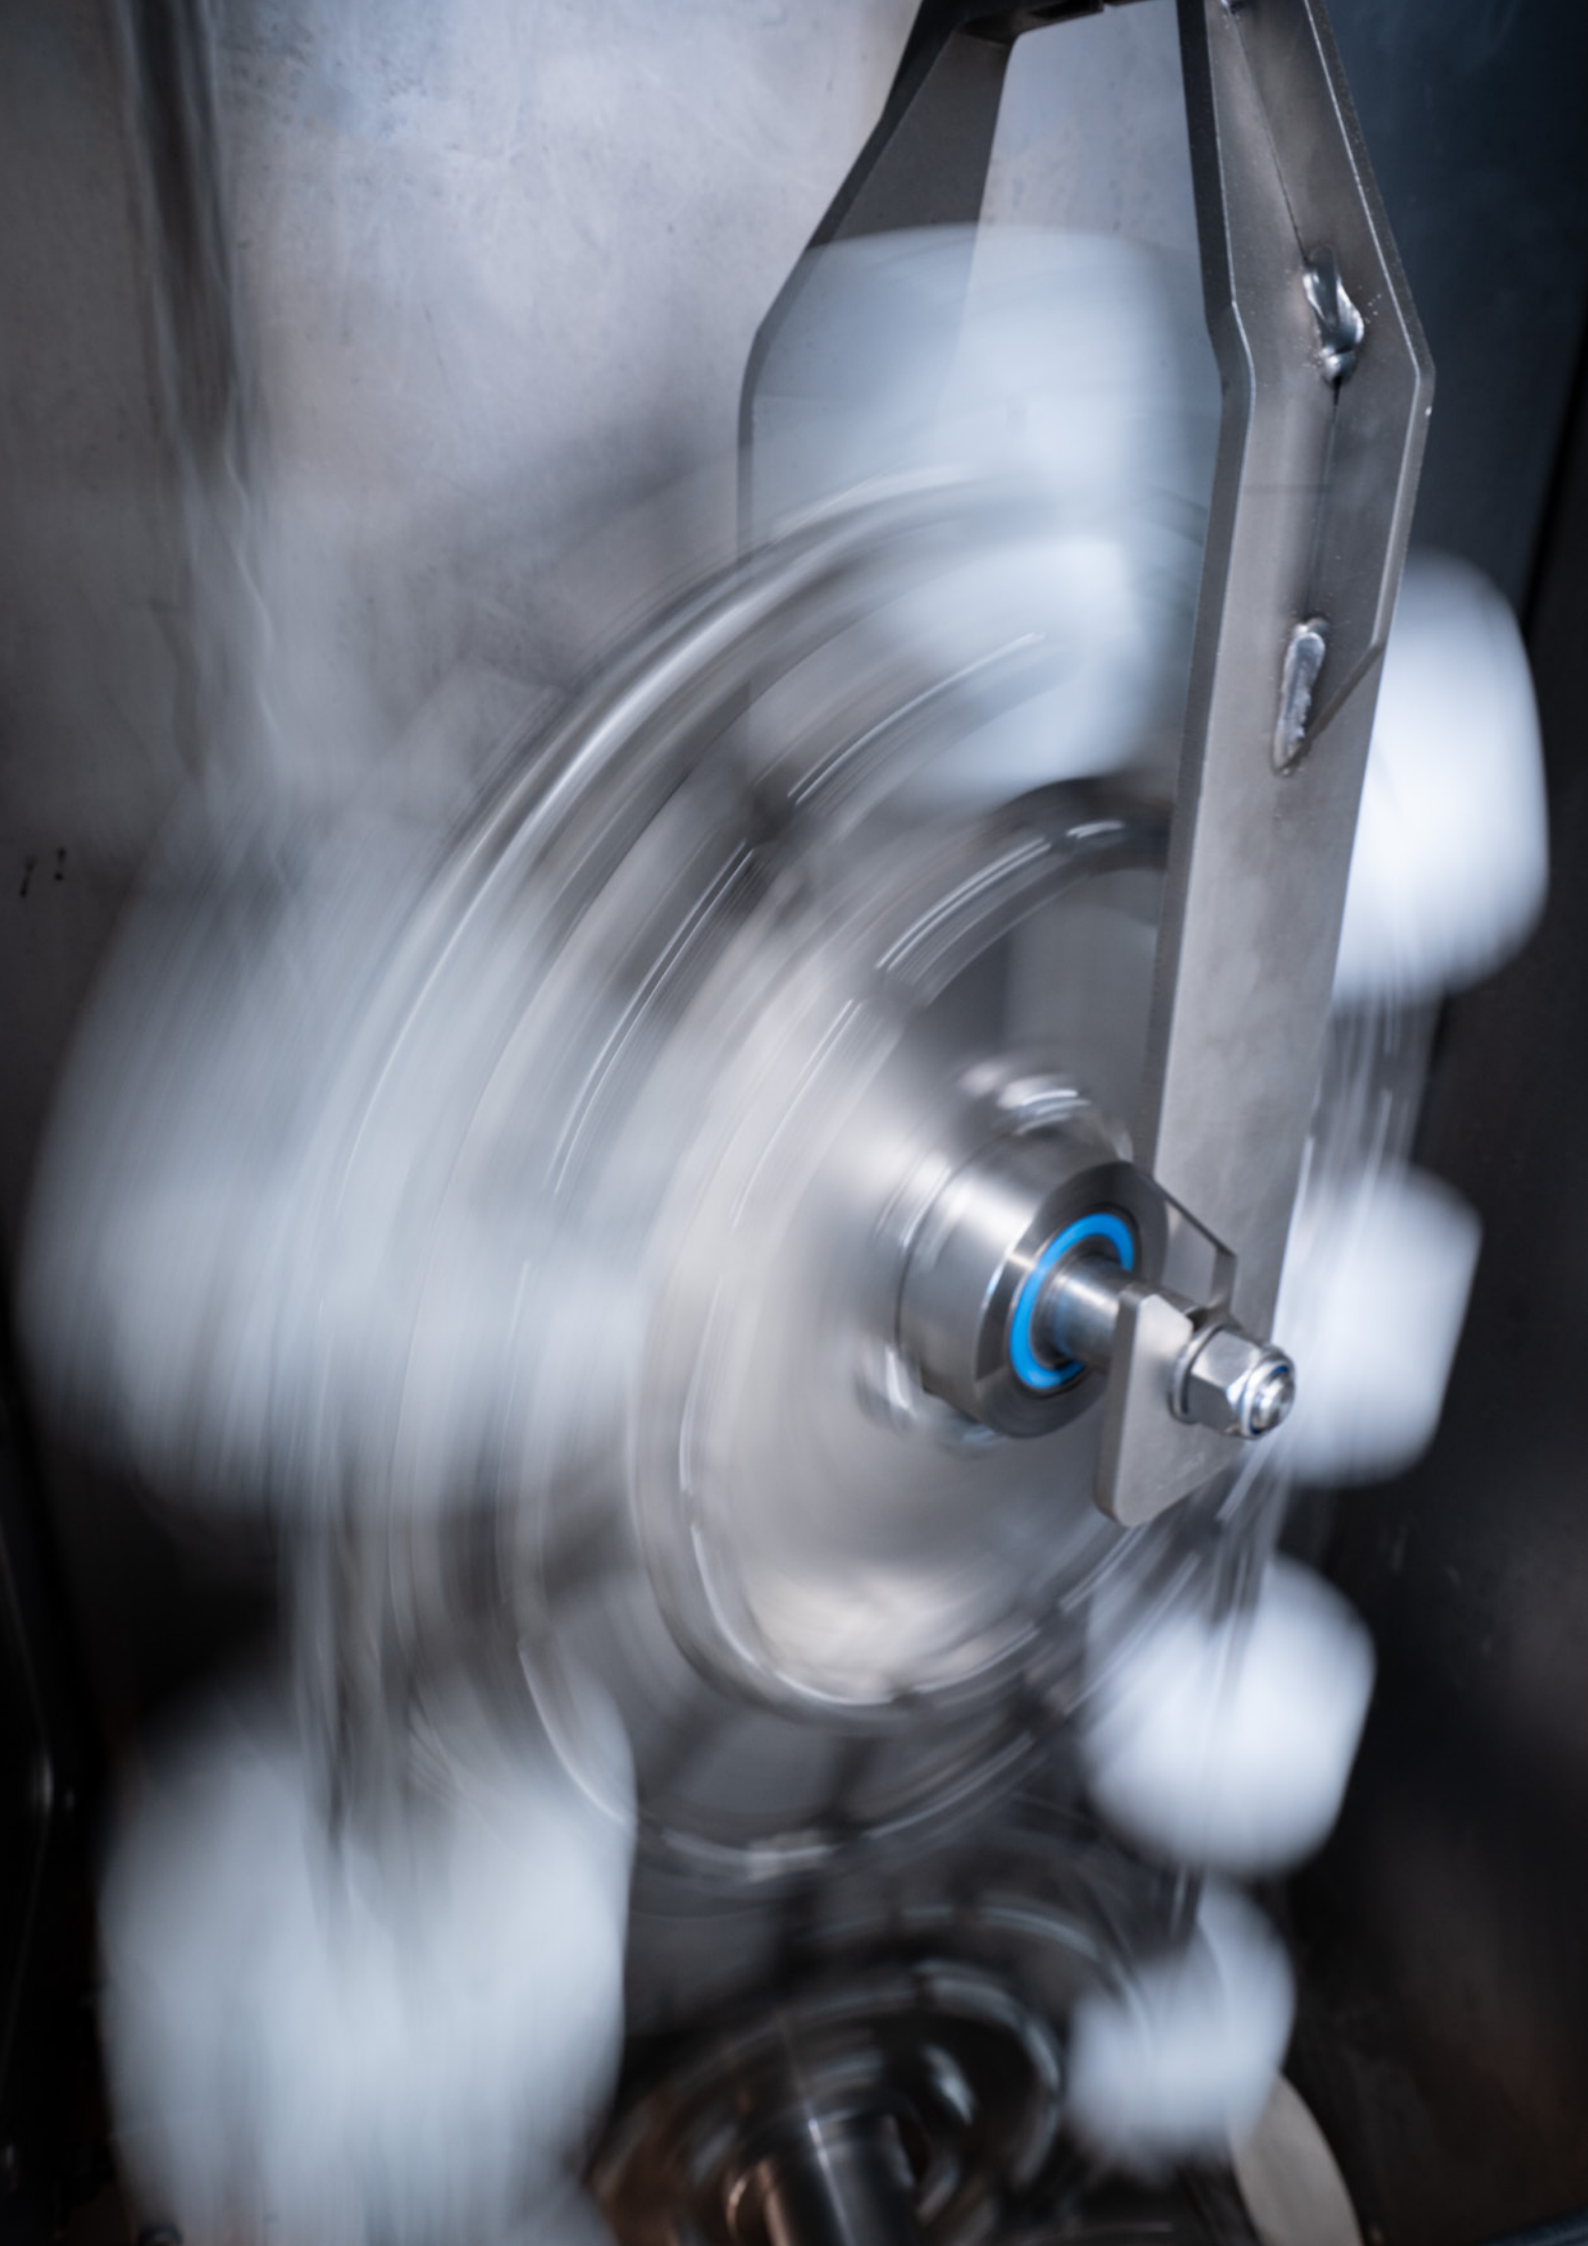

Tubular Chain Conveying System

The Real Alternative to Traditional Transport Systems

Ideal for conveying pet food, feed, cereals, and seeds, as it ensures the product remains intact during handling, with no risk of residues and maximum energy savings.

50%
Energy Savings

n.6
Models Available

60 m³/h
Max. Capacity



Product Protection

The fully enclosed design of this conveying system makes it an excellent choice for both the food and chemical industries. The sealed tube prevents the transported material from coming into contact with external contamination, while also avoiding dust accumulation.



Reduced maintenance

MIAL tube chain conveyors are designed for minimal maintenance compared to traditional conveying systems. With fewer moving components and gentle, low-speed product handling, vibrations and wear are significantly reduced. All maintenance points MIAL are centralised and easily accessible through dedicated inspection channels. Available in high-quality AISI 304 stainless steel for long-lasting performance.



Energy efficiency

Compared to other conveyor solutions, such as pneumatic or screw conveyors, the MIAL tube chain system delivers significant energy savings. Its inverter-controlled motor optimises speed, avoiding energy consumption peaks. With just one motor powering long distances and multiple directional changes, energy savings of over 50% can be achieved. A single motorised traction point replaces traditional systems that require multiple motors, simplifying the layout and reducing potential failure points.

The product breakage rate in the case of Pet Food is less than 0.2%*.

* The percentage varies depending on the hardness and particle size of the product.



Energy Efficiency and Product Protection

MIAL ADVANCED INDUSTRIAL TECHNOLOGIES

TUBULAR CHAIN CONVEYOR **CLEAN**

The **CLEAN** tubular chain conveyor is designed for the gentle and safe handling of a wide range of granular and non-granular products.

Composed of a series of circular discs, evenly spaced and fixed to the chain, it gently drags the product along the entire path.



Watch the video

Technical Data
TUBULAR CHAIN CONVEYOR CLEAN


Transmission	Gearmotor (No Belt)
Maximum Capacity	60 Mc/h
Models	3
Tube Diameters (mm)	Ø 100 - Ø 159 - Ø 200
Maximum Capacity Version Ø 100 mm	10 Mc/h
Maximum Capacity Version Ø 159 mm	30 Mc/h
Maximum Capacity Version Ø 204 mm	60 Mc/h
Type of Discs	Plastic discs, bolted to the chain
Drive system	On Chain
Installed Power	Up to 7,5 kW
Voltage	400 V - 50 Hz (Other voltages available on request)
Control Panel	Available on request
Available Versions	Galvanized Steel and Stainless Steel

Main Advantages

1. Energy savings of over 50%
2. Maximum capacity: 60 m^3/h
3. Product breakage in the case of pet food lower than 0.2%
4. A single motorized traction point
5. Available in AISI 304 stainless steel

Examples of
CLEAN Tubular Chain Conveyor Plants



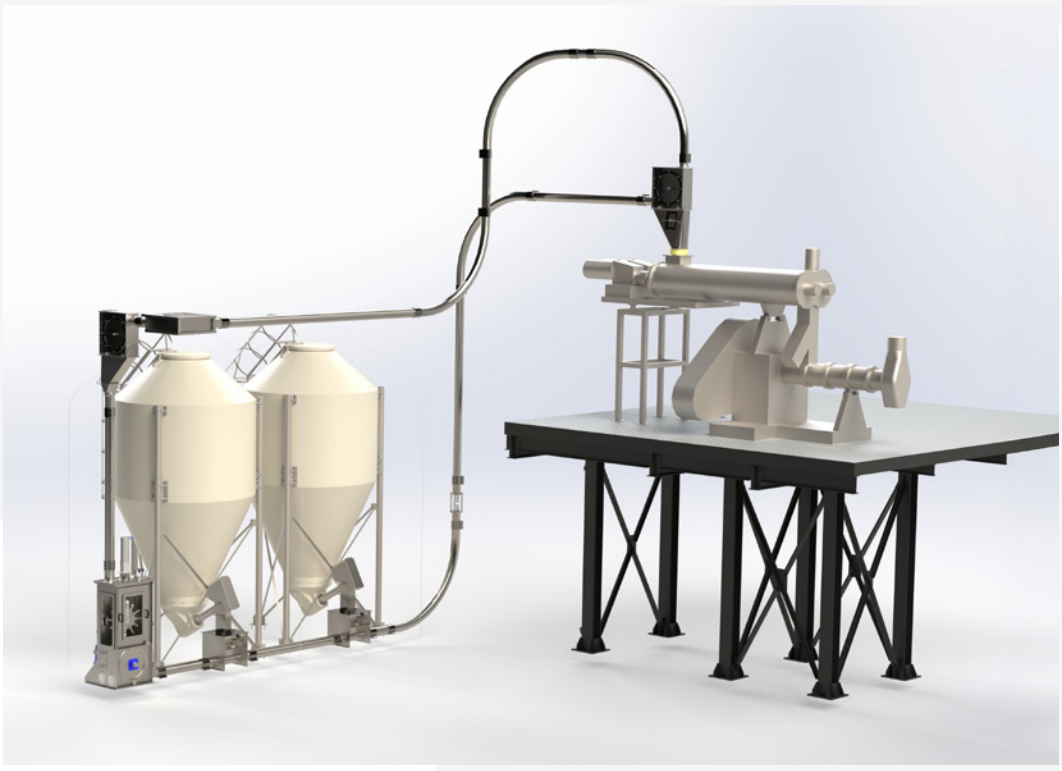



The alternative to traditional conveying systems

MIAL
ADVANCED
INDUSTRIAL
TECHNOLOGIES

TUBULAR CHAIN CONVEYOR **CHAINMOVE**

The tubular chain conveyor is used for transporting products over long distances in a simple and safe way, as an alternative to traditional conveying systems.

It is ideal for handling pet food, animal feed, cereals, and seeds, ensuring that the product remains intact throughout the process

Loading hopper

The product can be loaded through one or more loading hoppers, each equipped with a flow control device.

Chains with plastic discs

Inside the tubes, the product is conveyed by chains fitted with plastic discs, which ensure precise and consistent throughput. The model of conveyor can be customized depending on the type of product and the customer's specific requirements.

Unloading hopper

Finally, the product is discharged through unloading hoppers, available in various types and models. These hoppers are made of stainless steel and fitted with slide gate valves, which can be operated manually, pneumatically, or with a motorized system.




Technical Data
TUBULAR CHAIN CONVEYOR CHAINMOVE


Transmission	Gearmotor (No Belt)
Maximum Capacity	30 Mc/h
Models	3
Tube Diamaters (mm)	Ø 60 - Ø 100 - Ø 159
Maximum Capacity Version Ø 100 mm	2 Mc/h
Maximum Capacity Version Ø 159 mm	10 Mc/h
Maximum Capacity Version Ø 200 mm	30 Mc/h
Type of Discs	Plastic discs, overmoulded onto the chain
Drive System	On Discs
Installed Power	Up to 7,5 kW
Voltage	400 V - 50 Hz (Other voltages available on request)
Control Panel	Available on request
Available Versions	Galvanized Steel and Stainless Steel

Main Advantages

1. Energy savings of over 50%
2. Maximum capacity: 30 m3/h
4. A single motorized traction point
5. Available in AISI 304 stainless steel

Examples of
CHAINMOVE Tubular Chain Conveyor Plants

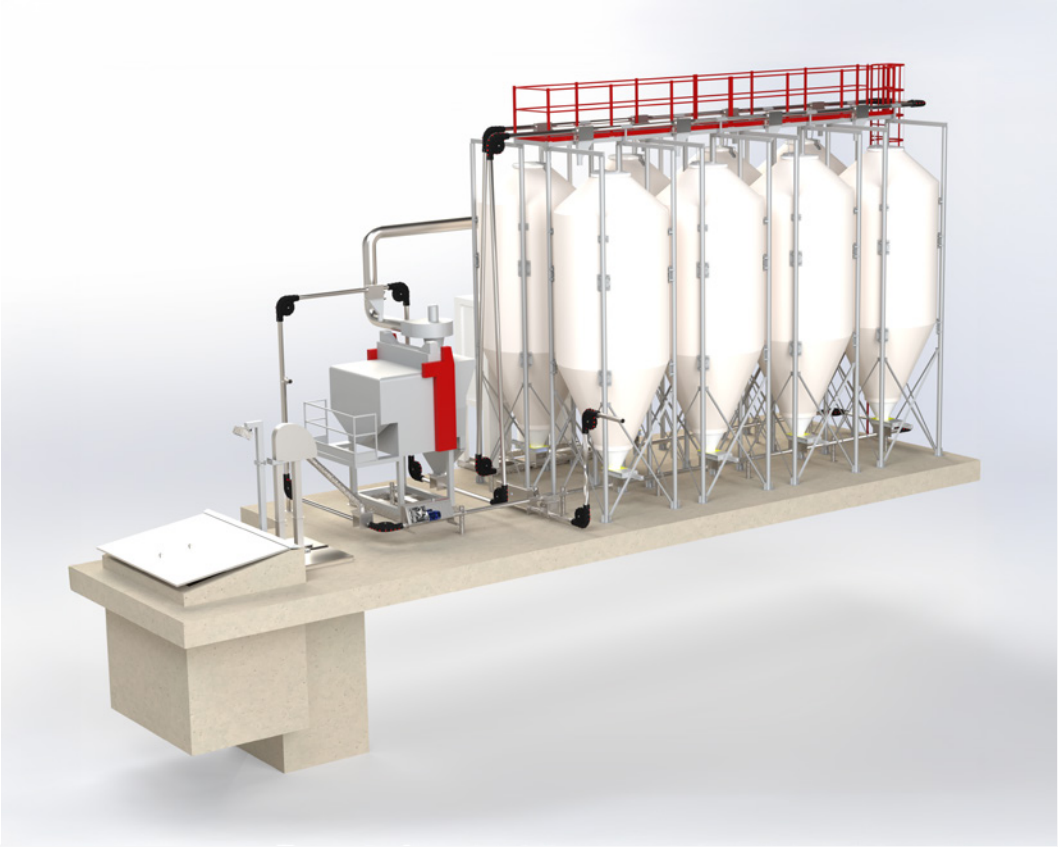

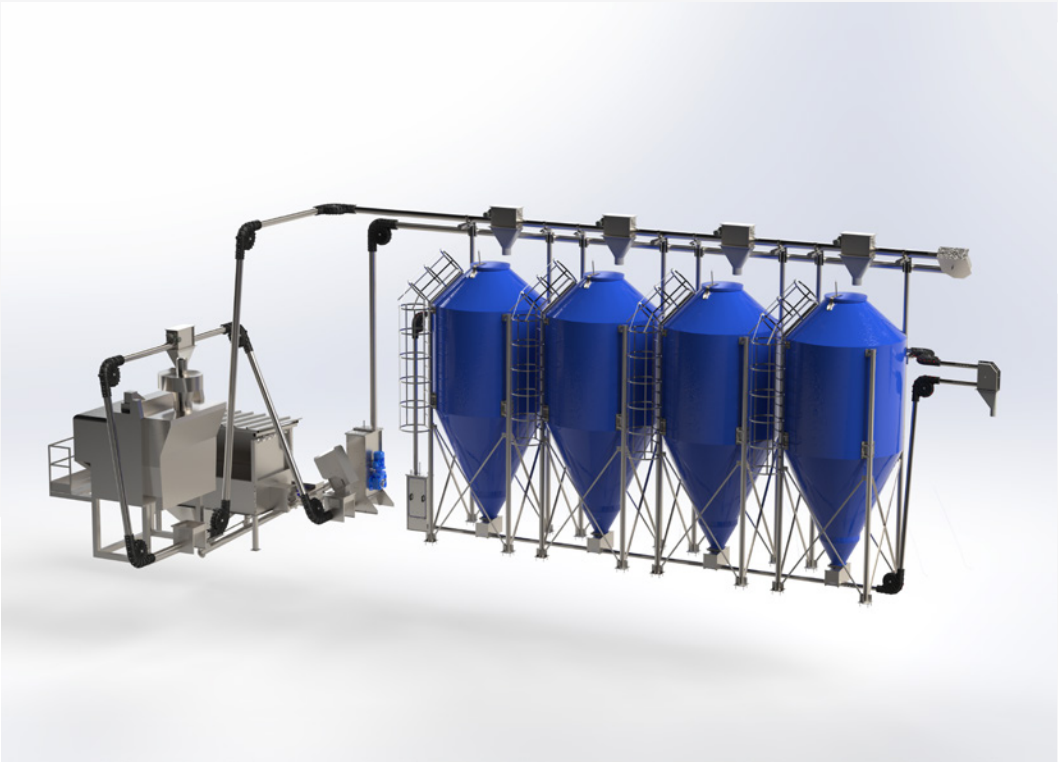

Our Solutions

CLEAN200

Drive unit ø 204

Max flow rate 60 m3/h





CLEAN159

Drive unit ø 159

Max flow rate 30 m3/h



CLEAN100

Drive unit ø 100


Max flow rate 10 m3/h



CHAINMOVE159
Drive unit ø 159
Max flow rate 30 m3/h



CHAINMOVE100
Drive unit ø 100
Max flow rate 10 m3/h

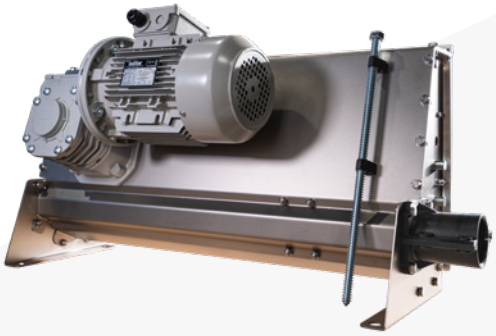

CHAINMOVE60
Drive unit ø 60
Max flow rate 2 m3/h

Your Products

FOOD PRODUCTS





- Malt and Cereals
- Coffee
- Nuts and dried fruit

PELLETS



CHEMICALS




- Chemical Products
- Granuloplastics

PET FOOD



ANIMAL FEED



MASSINI
INDUSTRIES

MIAL ADVANCED INDUSTRIAL TECHNOLOGIES

MF TECNO PACKAGING SYSTEMS

Massini Industries srl
Via Porziuncola, 28
06081 Tordandrea di Assisi (PG) - Italy
+39 075 8042312 - sales@mial.it
www.mialtecno.com