


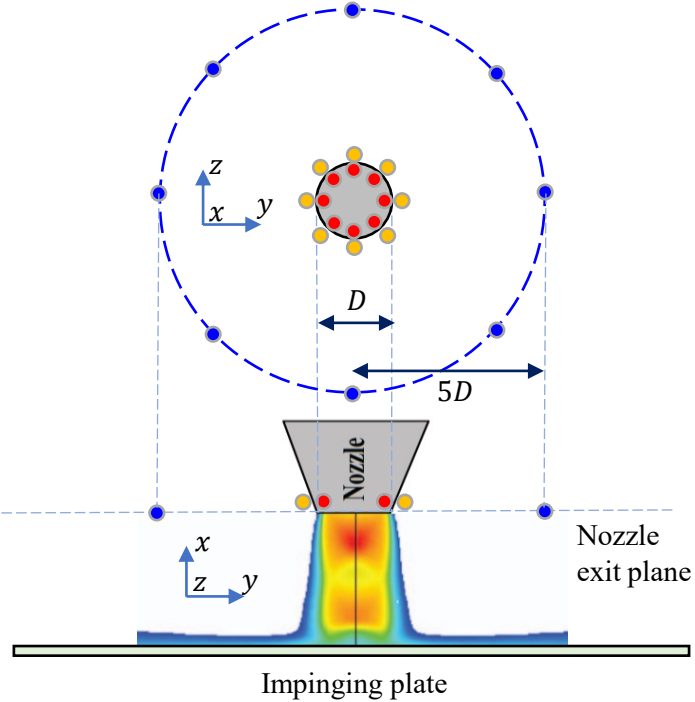


- Microphone sensor array (to evaluate fitness function): $i = 1$ to 8
- Microjet actuator array-1 (inside nozzle)
- Microjet actuator array-2 (outside nozzle)

Fitness function:

$$f(SPL) = \langle SPL_i \rangle_{baseline} - \langle SPL_i \rangle_{control}$$

Control configuration representation in 8-bit binary



16 possible
array-1 actuator
configurations

16 possible
array-2 actuator
configurations