


CN-LAB 2

1-10-2020
Nitesh.N. Banakar
IBM18C8065

1) Creating topology

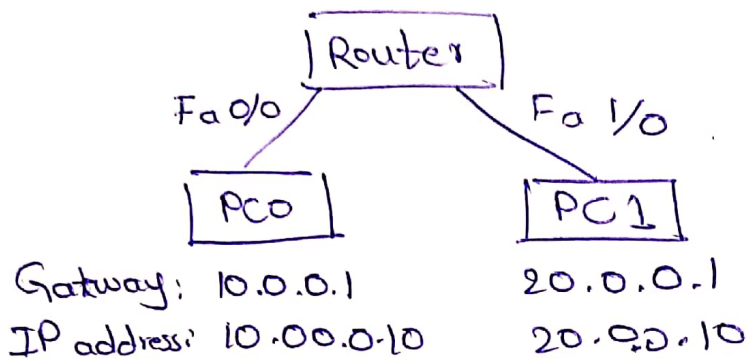

2) Set the gateway & IP address of end devices (PCs)

3) Configure router through CLI :- (for PC0)

Router ~~#~~ ~~conf~~ enable

Router # config t

Router (config) # interface fastEthernet 0/0

Router (config if) # ip address 10.0.0.1 255.0.0.0

Router (config if) # no shut down

→ Repeat for PC1 with correct fastEthernet no
& IP address

→ Send simple PDU from one PC to other

Nitesh