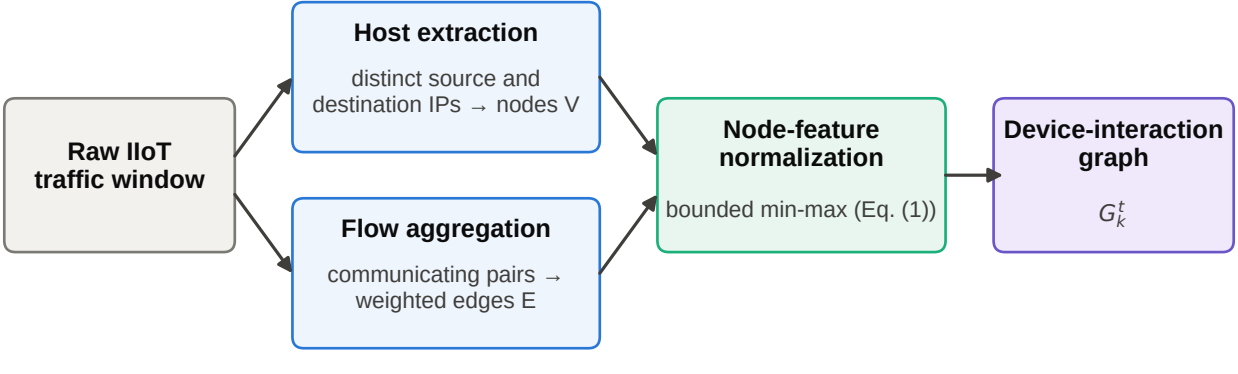
Raw IIoT traffic window
Host extraction
distinct source and destination IPs → nodes V
Flow aggregation
communicating pairs → weighted edges E
Node-feature normalization
bounded min-max (Eq. (1))
Device-interaction graph
G_k^t