



Keeping Our Customers Successful



www.tkmold.com



+86-755-2369 0000



sales@tkmold.com

Who We Are



43+ years experience on mold fabrication.

1000+ experienced staff.

Annual mold capacity **1000 + sets & 7000+ cavities**.

TK Technology Park is **180,000 m². (25 football fields)**.

No. 1 exporter of plastic injection mold with an MT3 class of China in 2015.

History Milestones

1983

First Tooling Workshop
Started up in Hong Kong



Started Injection
Molding Business

1985

1995



Tooling Factory
Moved to Shenzhen

2006

TK Technology
Park Founded



2010

Set up East China
Manuf. Base



2013

HK IPO (2283.HK)



2014

Built Up TK MOLD
GERMANY GmbH &
Acquisition of Nypro



2019

Joint-Venture with
FISAS NAVARRO in
Barcelona




2023

40 Years



// Organization Chart

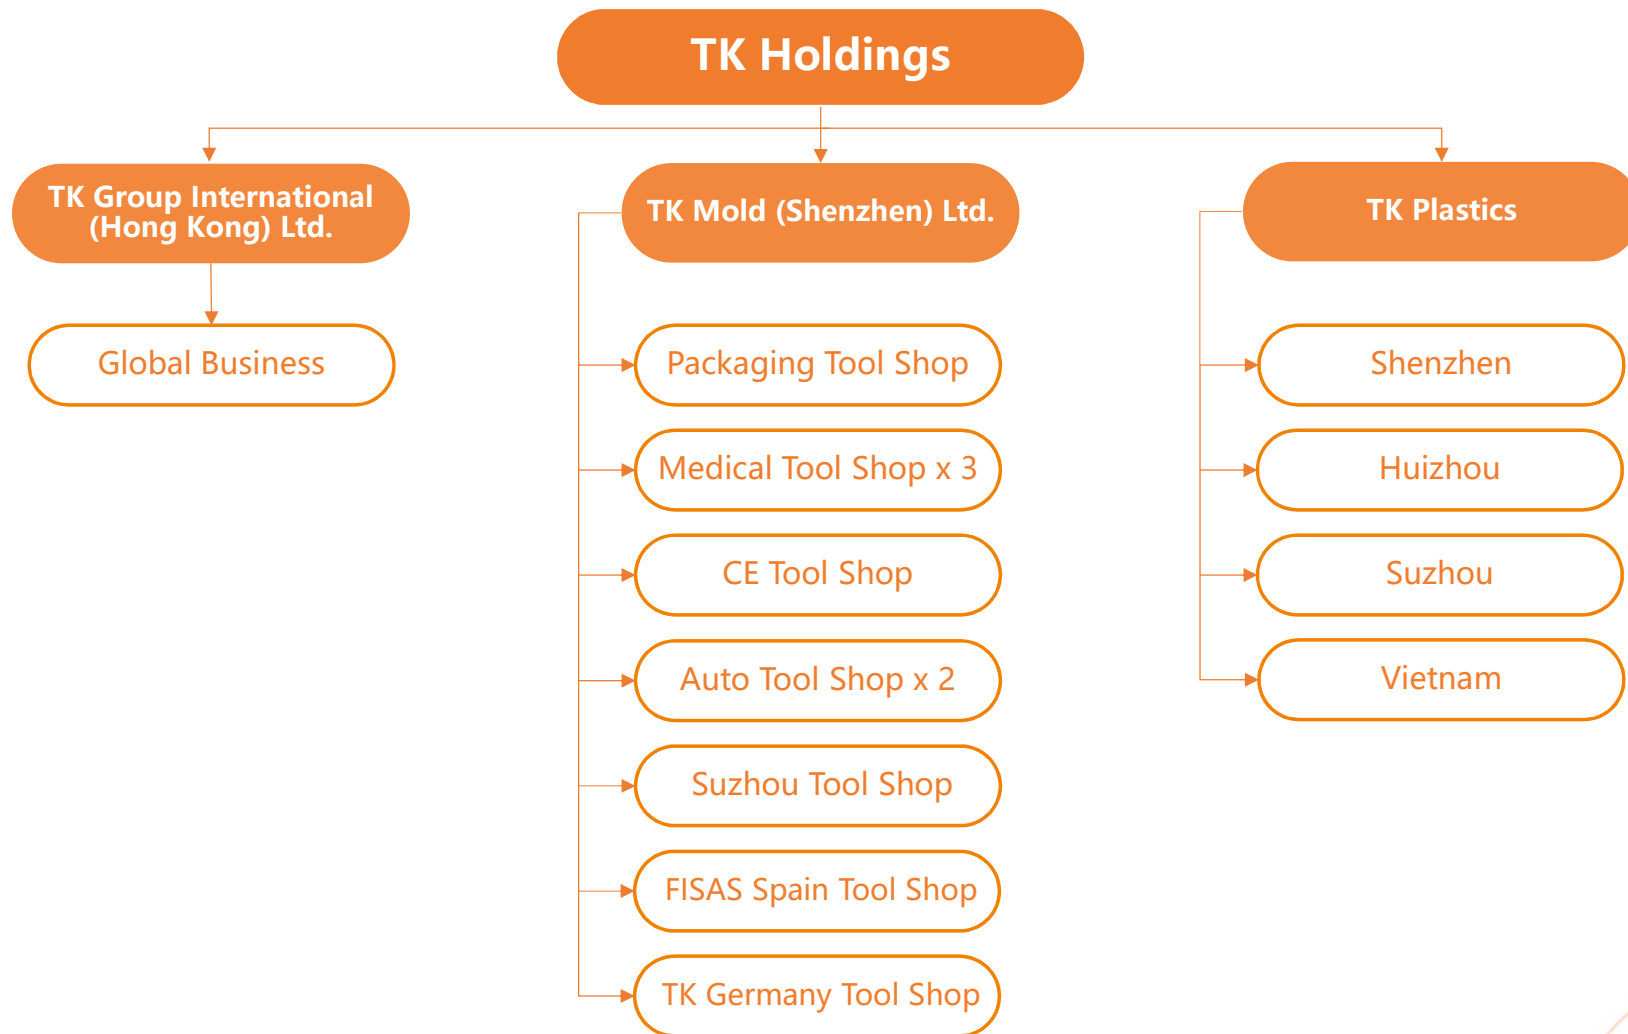

// Certifications



AEO Advanced

Since 2020.09.11



Carbon Footprint Verification (CFV)

Since 2025.02.21



EcoVadis award 52/100

2025.01.09-2026.01.09



ISO 9001

2023.2.25-2026.2.24



ISO 14001

2022.12.16-2025.12.15




ISO 45001

2022.12.24-2025.12.23




Keeping Our Customers Successful

Turnover

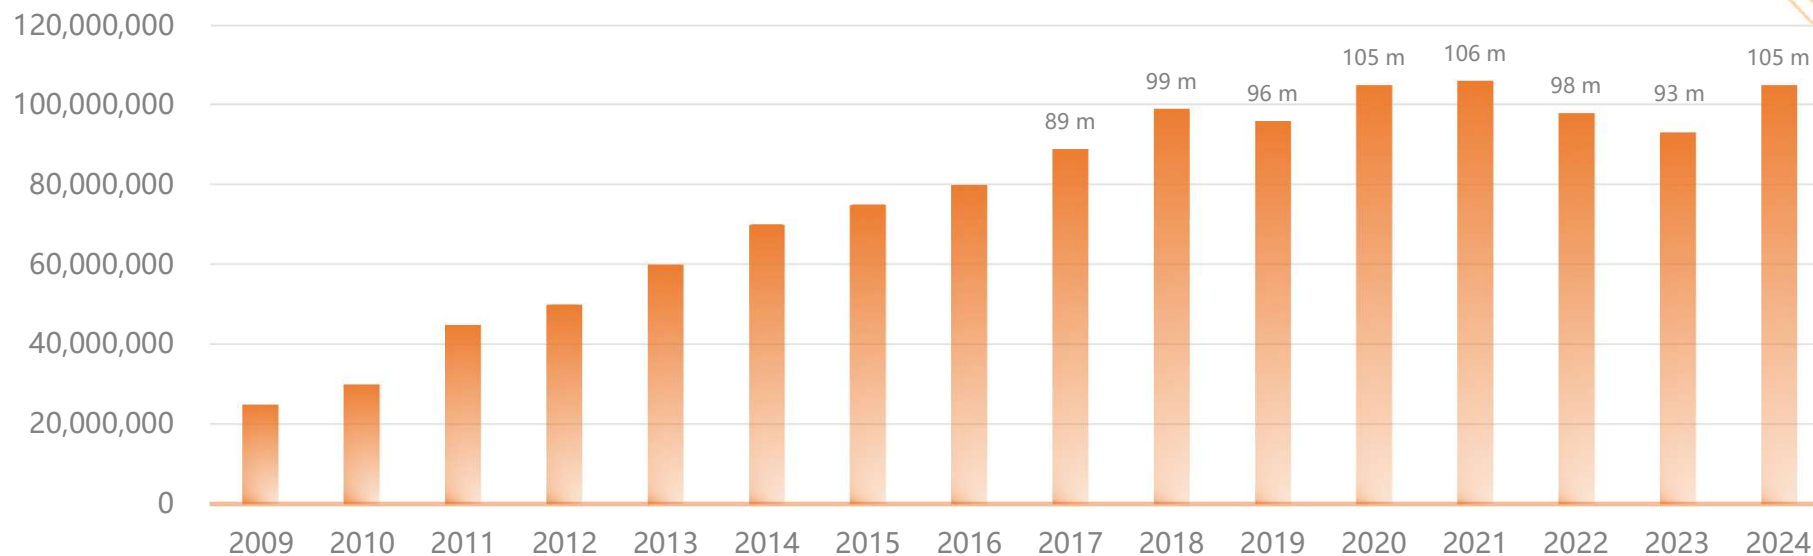


TKM

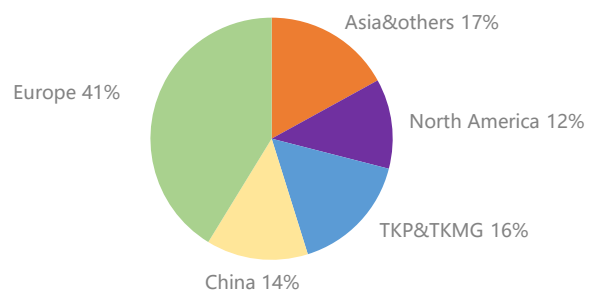

Asia&others North America TKP&TKMG China Europe

PM

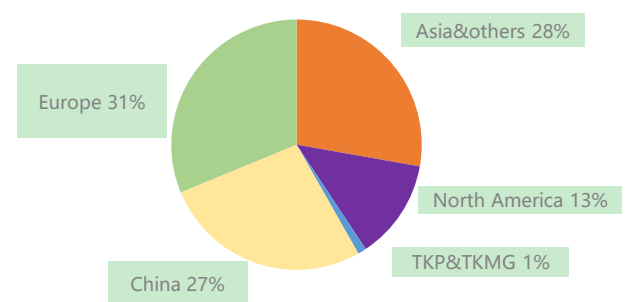

Asia&others North America TKP&TKMG China Europe



Keeping Our Customers Successful


What we do

Consumer Packaging Products



// Consumer Packaging Mold




- ◆ Short Cycle Time
- ◆ A side: Mirror polish
- ◆ High Production Stability
- ◆ Invisible gate and parting line

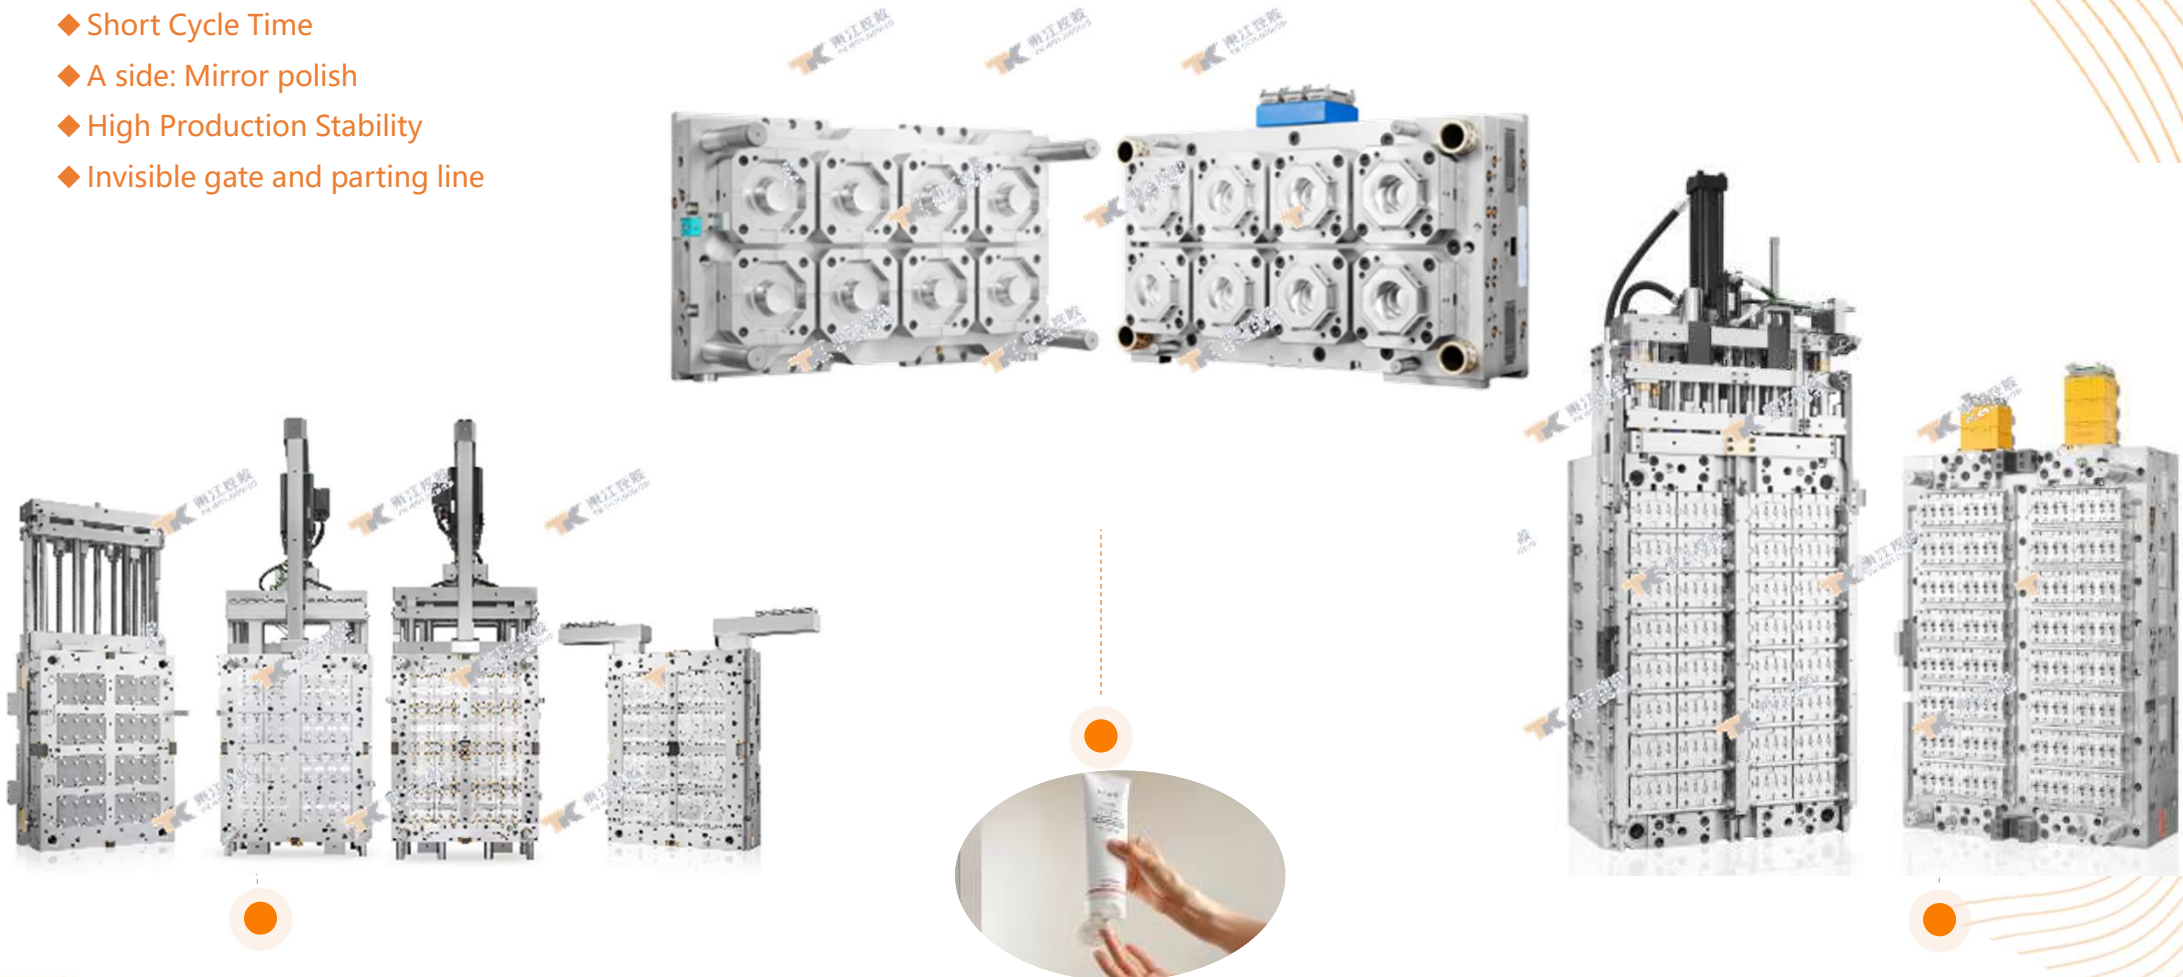



Food & Beverage Mold

- ◆ Single or Bi-injection
- ◆ Quick version change
- ◆ Industry-leading cycle time
- ◆ New product and quick pilot development

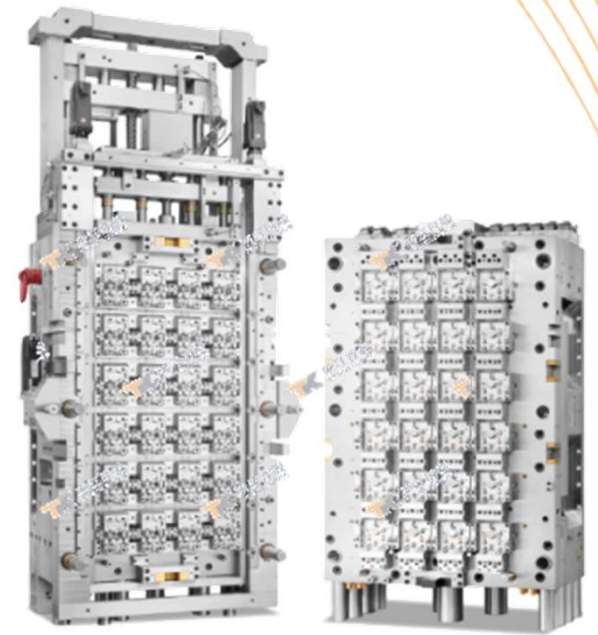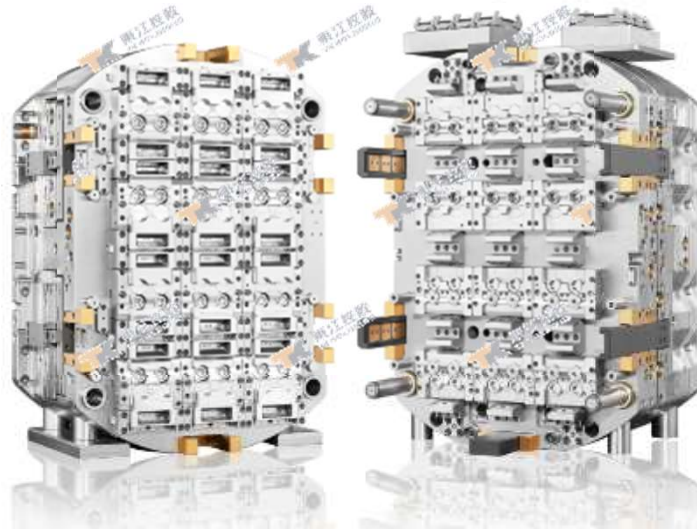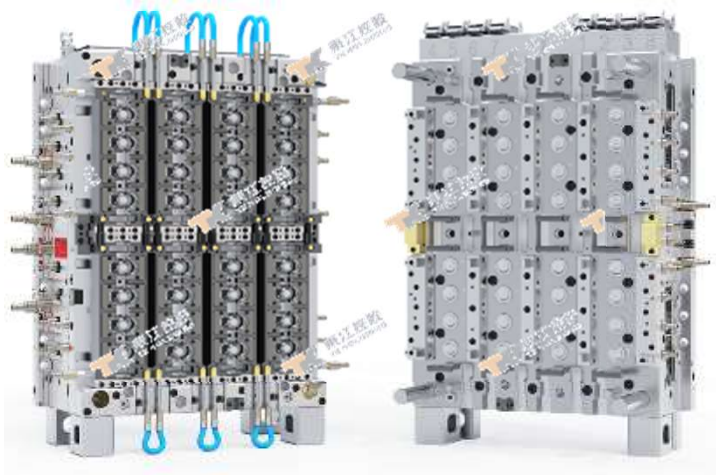


Keeping Our Customers Successful

// Customer Worldwide-Packaging





Why We Can

// Process Control

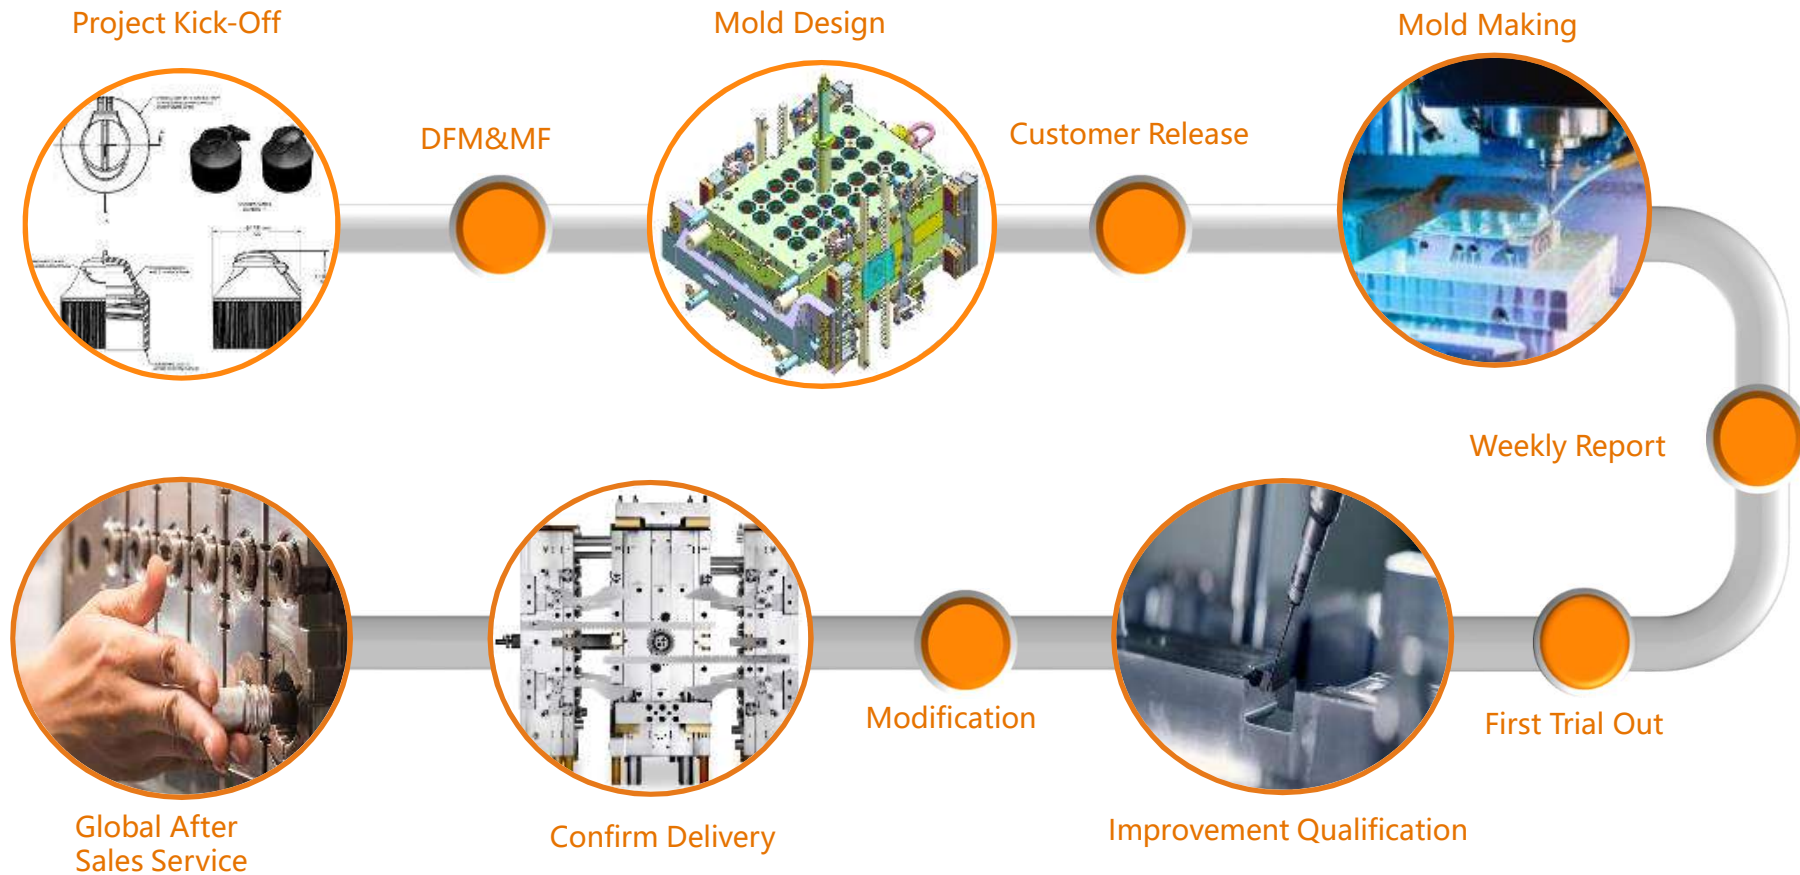


// Our Commitment to Quality

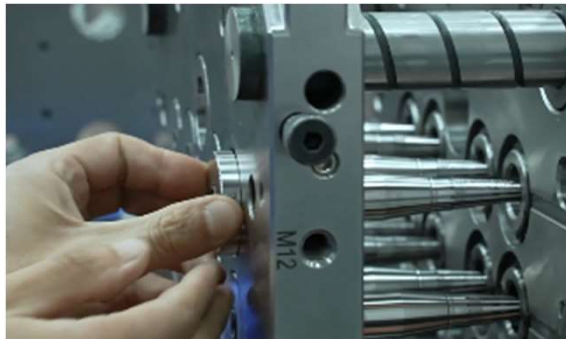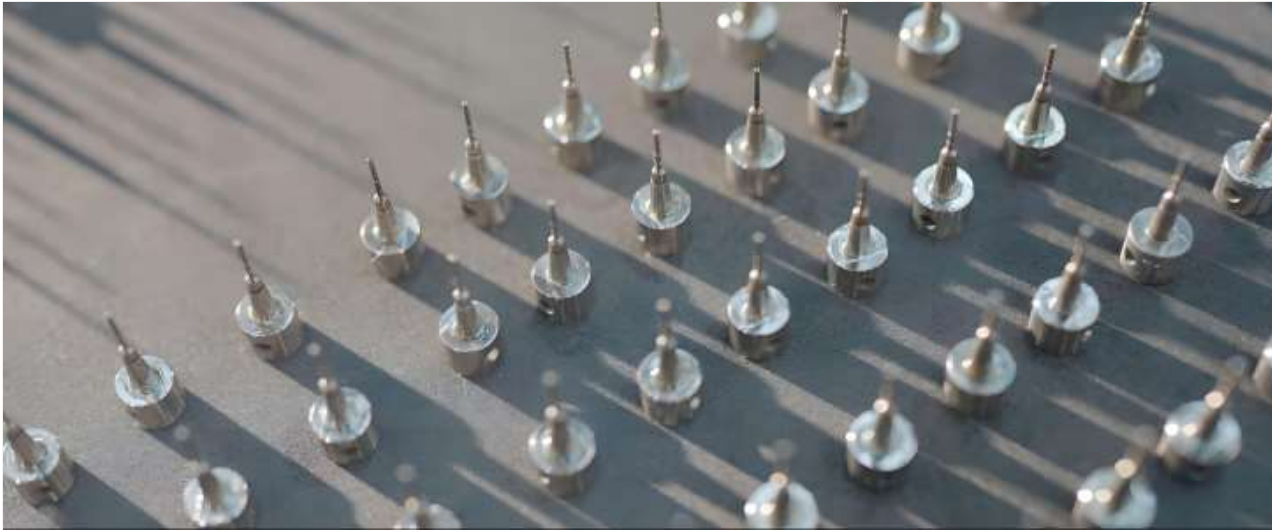

- ◆ Full temperature and humidity control clean workshop
- ◆ Ensure precise part dimensions are controlled according to machining tolerance data
- ◆ Direct assembly without manual mold matching and flying mold

// DFM & Moldflow Simulation

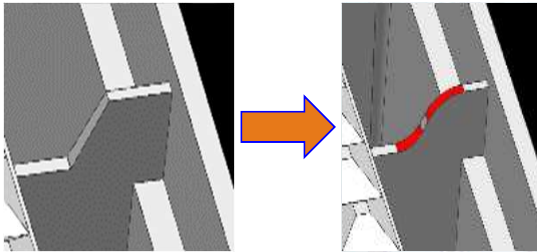

Early Technical Support DFM Service Started in 2010
Product design and feasibility study team providing mechanical design service on tooling optimization, project appraisal and solution proposal.

We Use UG NX8.5/12

Expertise with 30+ years' experience from European top tool shop.

400 Engineering Staff in TK Group.

DFM (Design for Manufacturability)

Process of optimizing a part / plastic mold design

Key Elements	Focus
Product Design	Suggested changes to improve the part design
Wall Thickness	Uniform walls prevent warpage and sink marks
Product Feasibility	Risk identification – Thin walls, Undercuts, Sharp edges
Draft Angles	Tapered walls allow easy part ejection from the mold
Gate Location	Optimized for balanced flow and minimal weld lines
Parting Line	Clearly defined to avoid flash and ensure ease of molding
Tolerance Stack-Up	Realistic tolerances suitable for molded plastic parts
Tooling Feasibility	Mold Layout, Gating, Lifters & Sliders
Ejection Considerations	Flat surfaces and ribs positioned for easy ejection
Material Selection	Compatible with part function and molding process
Cooling Feasibility	Design allows effective mold cooling to reduce cycle time
Mold Operation	Mold sequence, Safety sensors
Machine mapping	Platen size mapping, Ejector and KO pos, Hydraulic-Pneumatic core Pulls, Clamping, Mold weight etc...



Purpose of Injection Mold DFM:

- Reduce production costs
- Improve moldability
- Shorten lead time
- Minimize defects and rework
- Ensure longer mold life

// Advanced Machines & Equipment

Major Machines	Qty
CNC Milling Machine	109
5-Axis CNC Milling Machine	21
EDM Machine	55
EDM Wire-cut Machine	19
Grinding Machine	59
CNC Jig grinder	3
EDM Hole Drilling Machine	3
Lathe	7
High Precision Hard Turning	3
CMM	21
IMM for test (Including 2k)	19(6)
Flexible automatic production line	8
Automation unit	5+3



Studer Universal Grinding Machine



Hauser CNC Jig Grinder




Agiecharmilles EDM Machine



Yasda Jig Bore High Speed CNC

Quality & Measurement

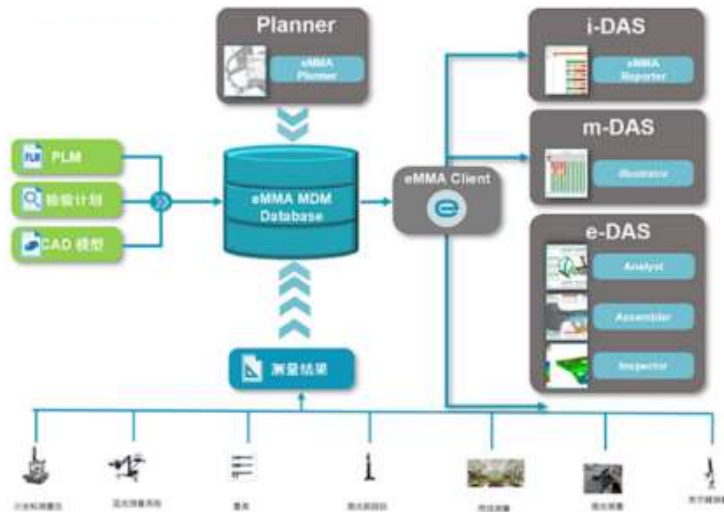

Quality Management System:

Centered on digitalization, the system integrates end-to-end quality management with rigorous controls at every stage to ensure molds and finished products comply with quality standards.


Dimensional:

- ◆ CMM (Coordinate Measuring Machine)
- ◆ OMM (Optical Measuring Machine)
- ◆ Roughness Measuring Machine
- ◆ Optical Surface Profiler
- ◆ Digital Caliper
- ◆ Ring Gauge
- ◆ Thickness Meter
- ◆ Three latitude optical scanner

// Conformal Cooling

Conformal Cooling Channel by Direct Metal Laser Sintering (DMLS) and Diffusion Bonding :

- ◆ TK Mold offers in-house metal additive manufacturing to produce conformal cooling inserts, providing an integrated solution for high-performance tooling with up to **35%** cycle time reduction and improved dimensional stability
- ◆ Conformal Cooling channels precisely follow the shape of the molded part
- ◆ Minimize warpage, sink marks, and internal stress in molded components
- ◆ Increase production efficiency , ideal solution for high-volume and precision molding
- ◆ Max. work piece dimensions: 250 × 250 × 380 mm (Height)

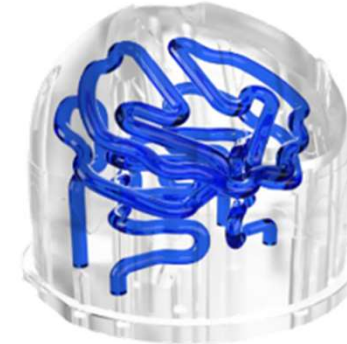

Strategic Partnerships with Industry Leaders



We collaborate with industry-leading suppliers to ensure the highest standards in steel, heat treatment, hot runner systems, and production equipment—delivering reliable performance for every mold we build.

// Mold Testing Center




Clamping Force	Brand	Robot	Visible water flow	2 nd Shot	Remarks
100T	Arburg	1	YES		Arburg-LSR material
150T	Fanuc	1	YES		
180T	JSW	2	YES	1	Rotation Table L Type(2K)
200T	Milacron	1	YES	1	Rotation Table L Type(2K)
250T	Krauss-Maffei	1	YES	1	Rotation Table L Type(2K)
280T	JSW		YES		
400T	HUSKY		YES		High Speed
450T	JSW		YES		
500T	Netstal SynErgy	1	YES	1	Rotation Table L Type(2K)
650T	ENGEL		YES	1	Rotation Table L Type(2K)
1000T	Krauss-Maffei	1	YES		
1500T	ENGEL	1	YES	1	Rotation Table L Type(2K)
650T	HUSKY	1	YES		High Speed, ready in Q3 2026

// Data Driven Mold Qualification Practices

Our validation process follows scientific molding best practices to establish a stable, repeatable process window.

By collecting key data across from pre- to post-molding phases, we ensure part quality, dimensional consistency, and tool performance from first shot to production

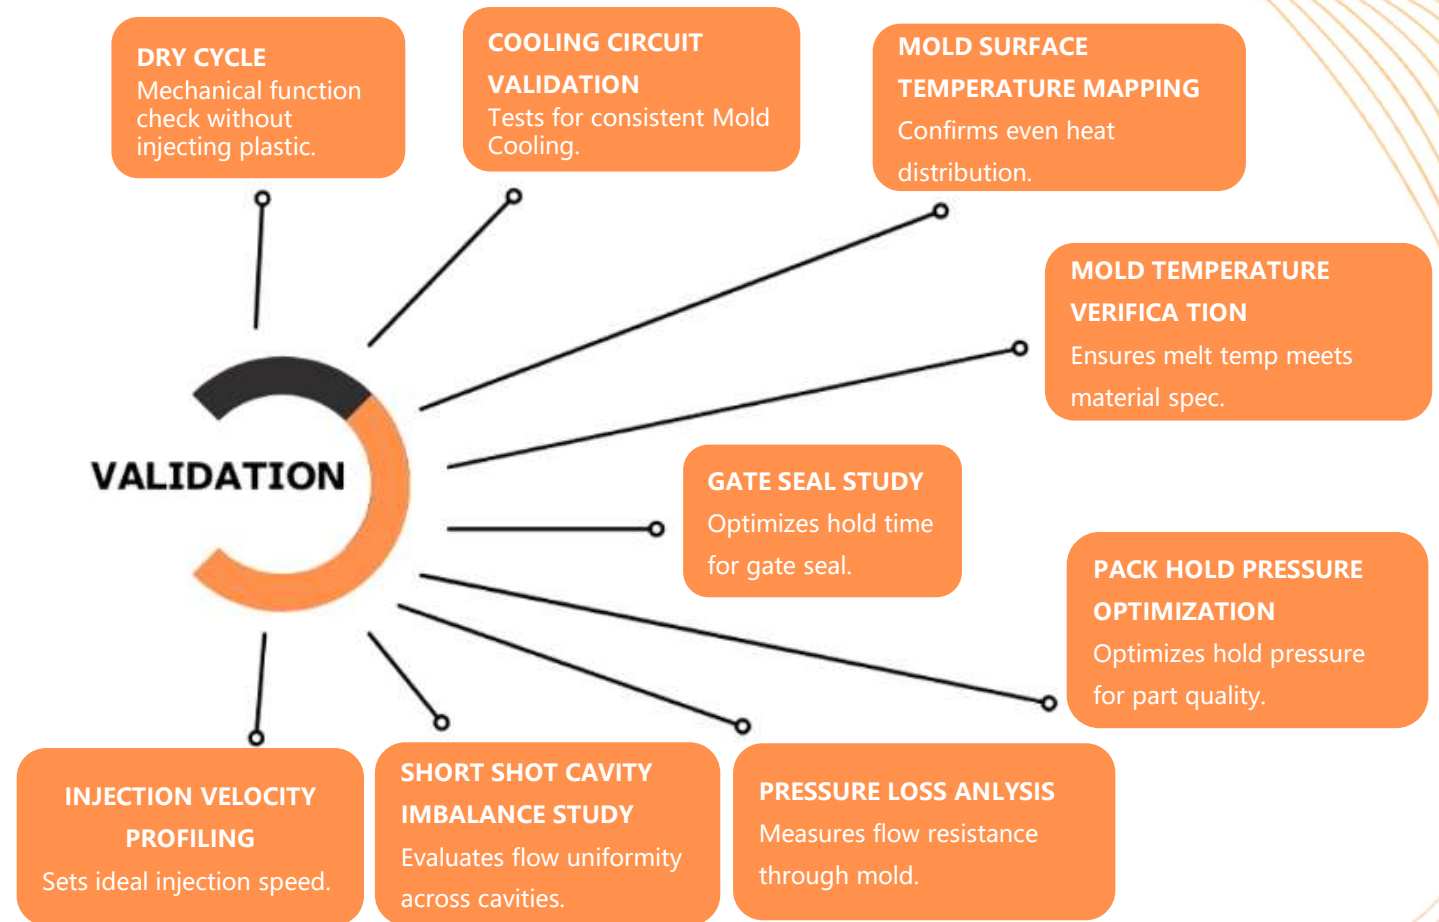

24/7 Automation lines



+56 meters dark room, equipped with 10 robots , 35 CNC milling, 11 EDM and 5 CMM


Functional Testing for Real-World Performance

- ◆ Tensile testing
 - ◆ Torque test
 - ◆ Sealing test
 - ◆ Leakage testing
 - ◆ Oil pouring wall hanging test
 - ◆ High temperature; Low temperature; Negative pressure; Shelf life testing.....
- ◆ The professional inspection team provides full - process quality control services, covering Geometric Dimensioning and Tolerancing (GD&T), Process Validation Testing (PVT) and Failure Analysis (FA). Through integrated technical solutions, the mold development cycle is shortened.



// Lead Time Control

Tooling Concept Creation

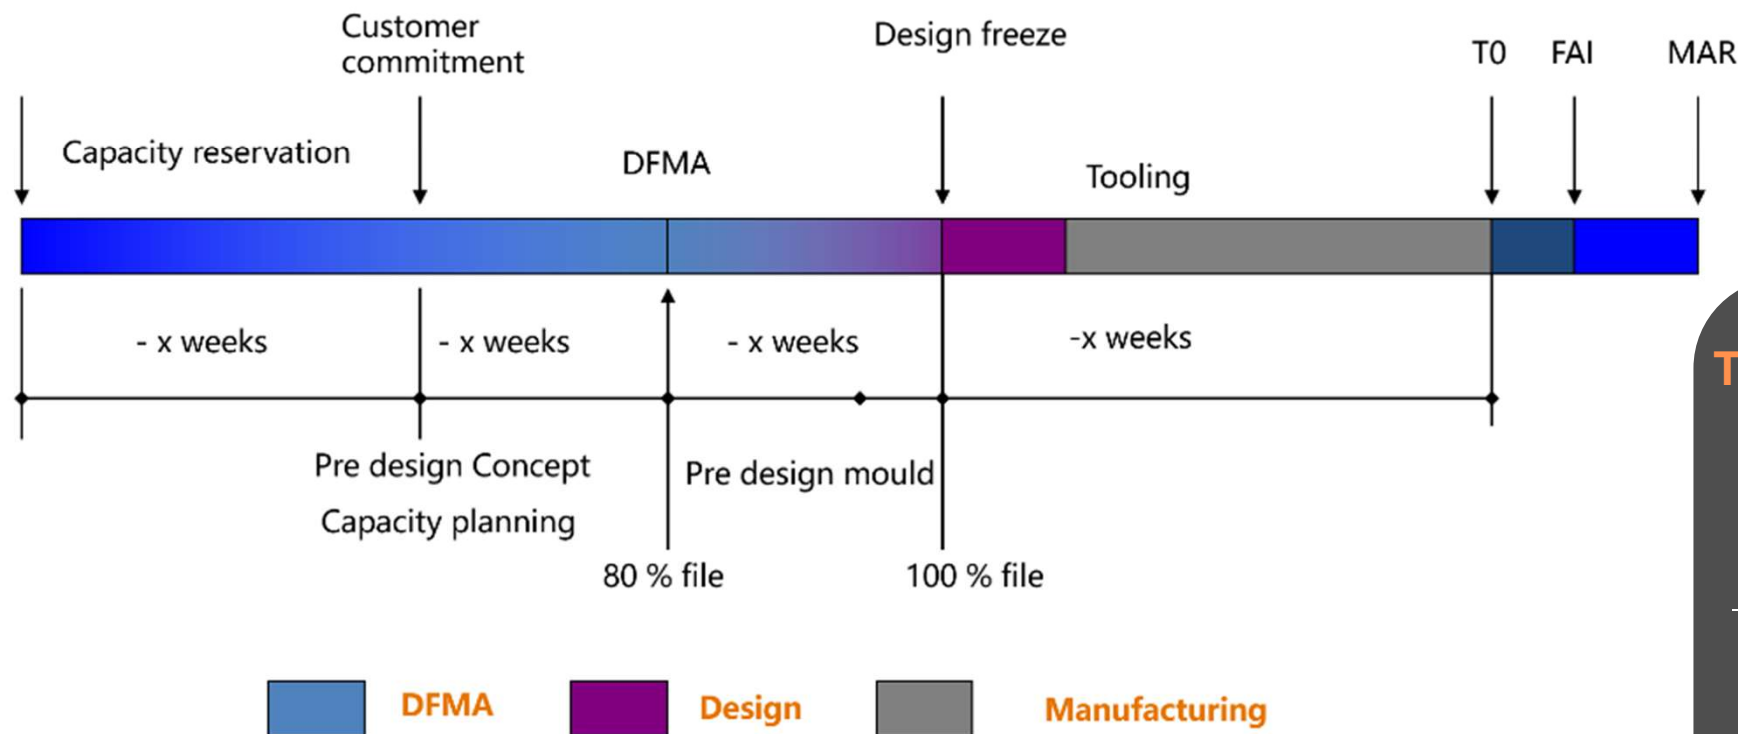

TOOLING BUILD TIME

3-6 Months

TK Mold

8-18 Months

EU or US Toolmakers

2-3X FASTER

// TK team on site support

Project manager, account manager, senior tool maker, and senior process engineer with VISA to provide on site start up and tear down support

Average Working Experience in TK Is 15 Years.




// Capacity of Big Project Management



Big capacity and flexibility to finish +1000 cavity big project in short time.

Keeping Our Customers Successful

// Capacity of Big Project Management

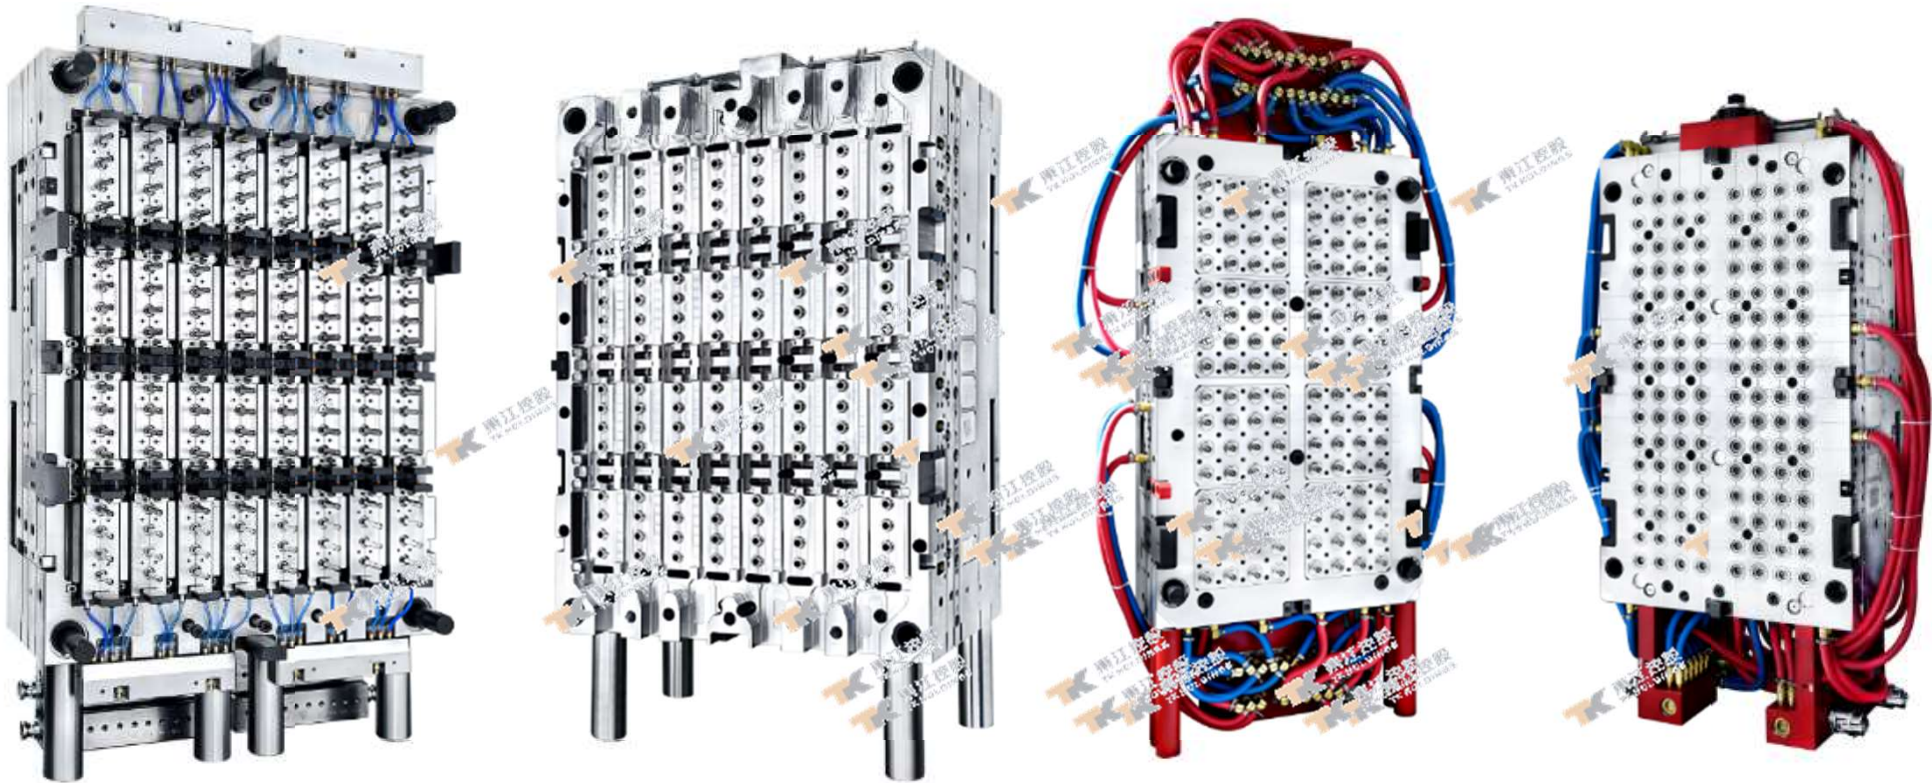

12 sets 128 cavity mold finished in 6 months

Big capacity and flexibility to finish +1000 cavity big project in short time.

// Capacity of Big Project Management



Big capacity and flexibility to finish +1000 cavity big project in short time.

Keeping Our Customers Successful

CAPS AND CLOSURE




Shampoo FT Cap

30*72*80 mm, PP, 9.8g

- Cavities: 32+32
- Mold Size: 1000x 1520 x 1390mm
- Mold Weight: 19000Kg
- Tonnage: 600 Ton
- Cycle Time: 14 Sec
- Region : USA
- Highlights:

Servo Ejection + IMC
Smart and Short Cycle time

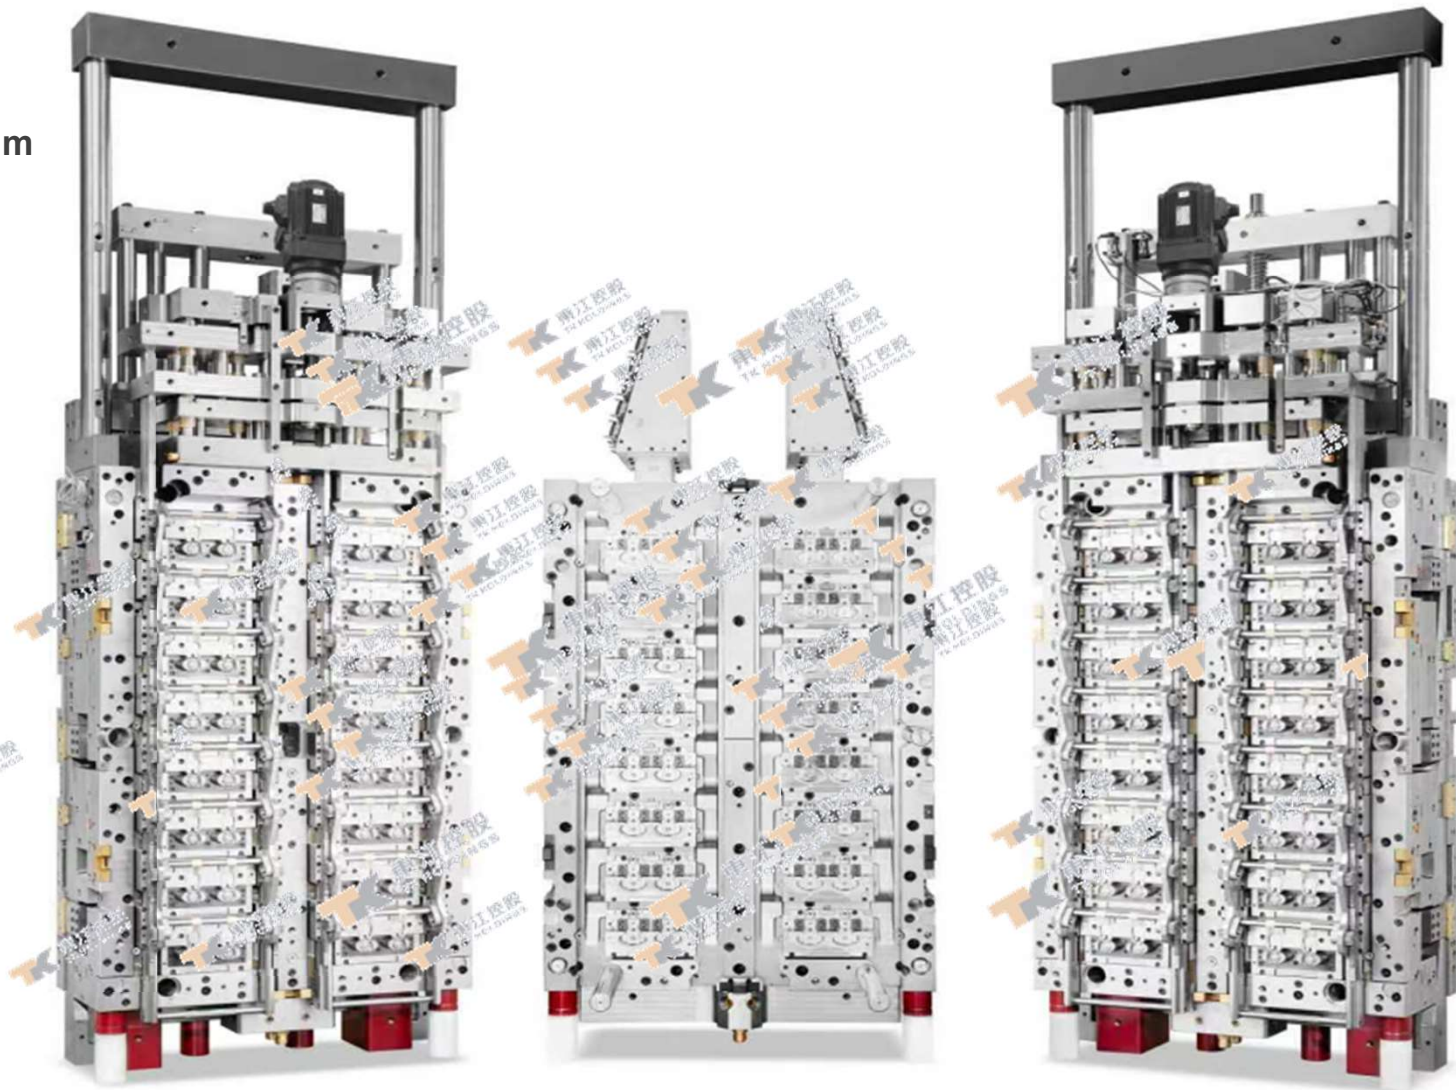

128 cavity mold


Toothpaste FT Cap

16*16.3*35.8mm, PP, 1.15g

- Cavities: 128
- Mold Size: 900x 1300 x 820mm
- Mold Weight: 6920Kg
- Tonnage: 380 Ton
- Cycle Time: 12 Sec
- Reduce from 13.0 to 12s
- Highlights:

In mold closing from Top

Unscrewing driven by hydraulic

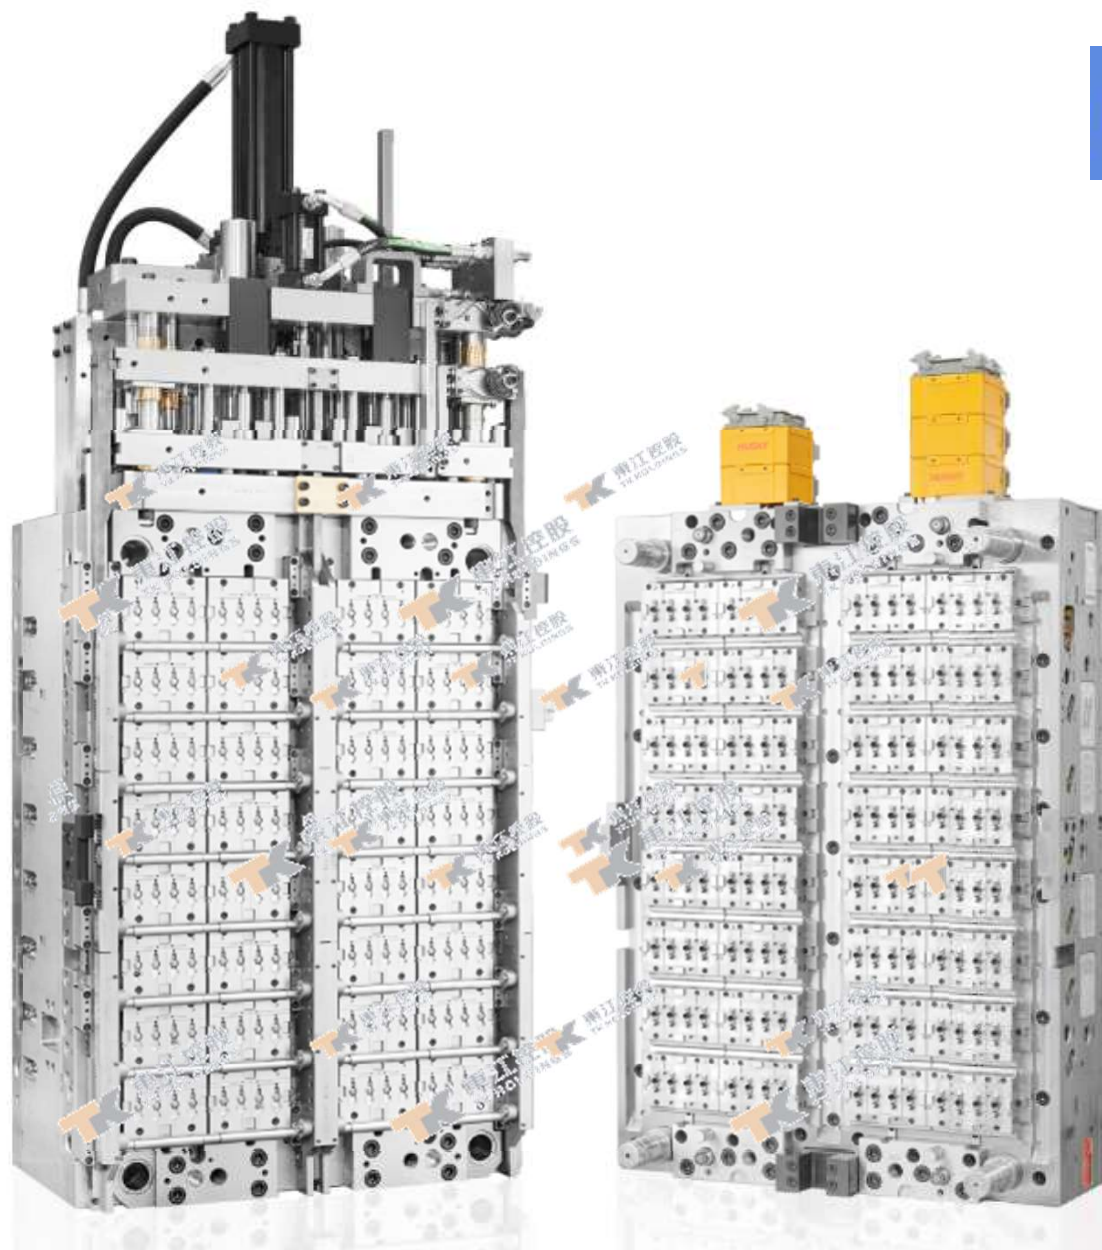


128 cavity mold



Tube

Φ19x102, 4.3g , PP

- Cavities: 1x128
- Mold Size: $W \times L \times H$
 - 1400x1000x940
- Mold Weight: 10265 Kg
- Tonnage: 580 Ton
- Cycle Time: 14 Sec
- Region: North America
- 12 molds big project

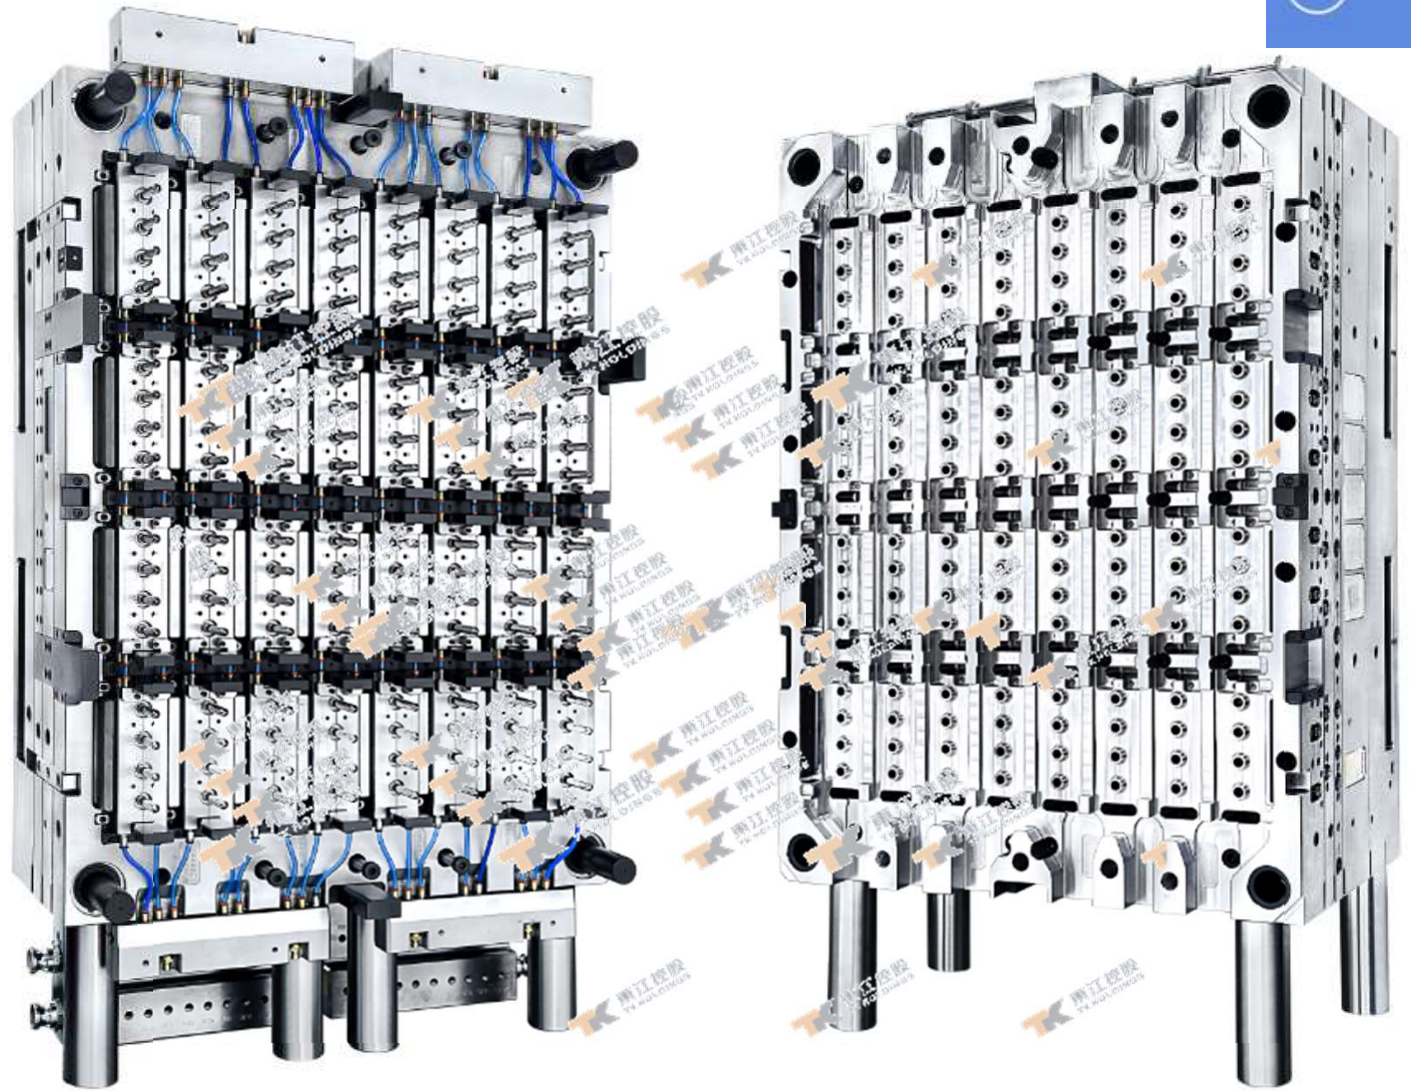


CAPS AND CLOSURE

Shampoo FT Cap

27*53*70mm, PP

- Cavities: 64
- Mold Size: 950x 1200 x 680mm
- Mold Weight: 5200Kg
- Tonnage: 500 Ton
- Cycle Time: 11 Sec
- Highlights:

Moldmax HH insert and fast C/T

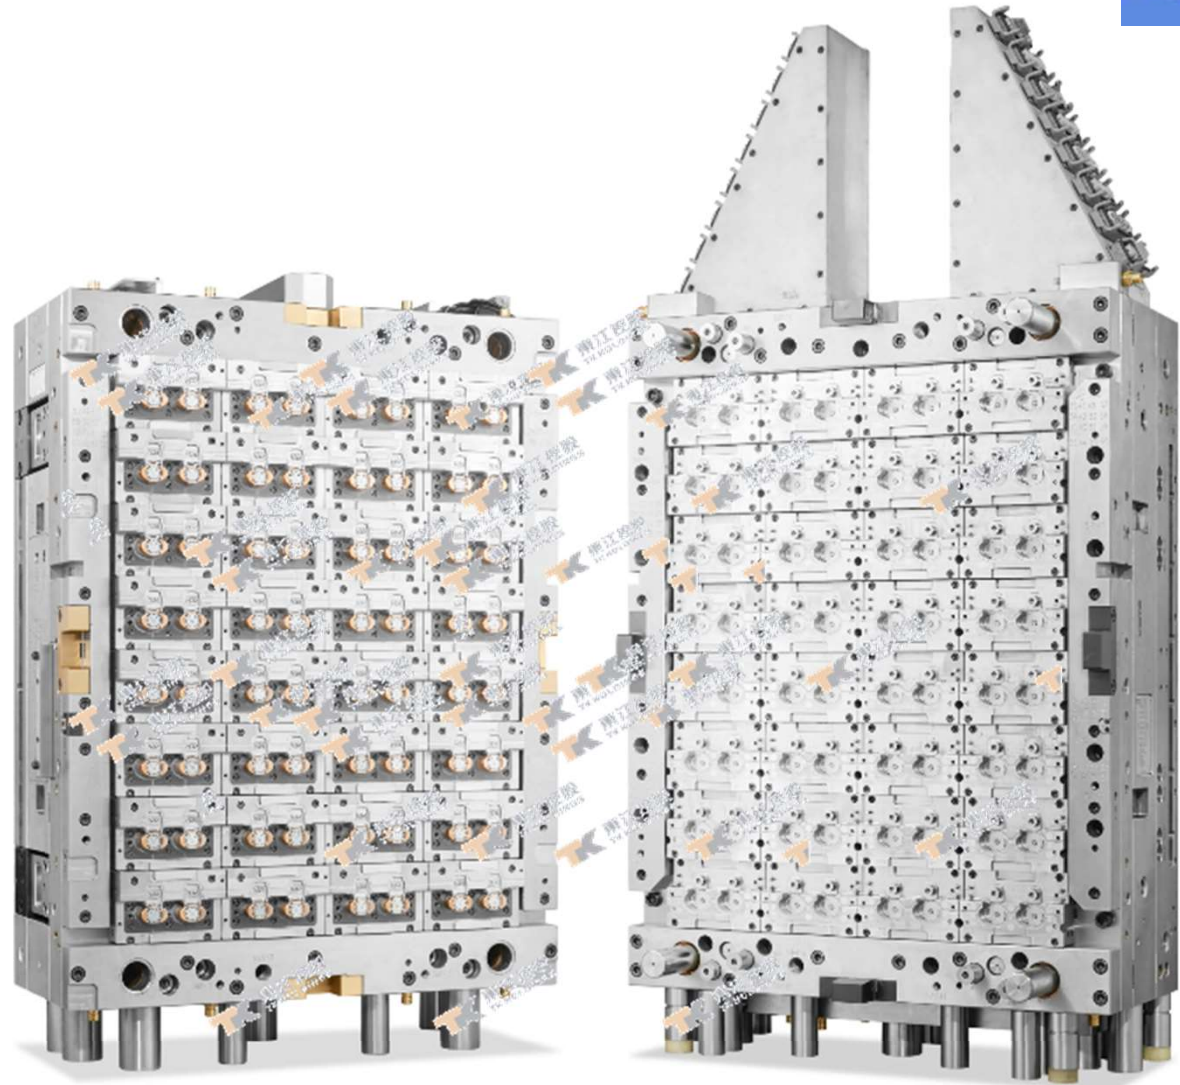


CAPS AND CLOSURE

Flip Top Cap with TE

ø25*15mm, PP, 2.43g

- Cavities: 32
- Mold Size: 600x 970 x 560mm
- Mold Weight: 2200 Kg
- Tonnage: 220 Ton
- Cycle Time: 12 Sec
- Highlights:

In mold closing + TE design
3 molds one package

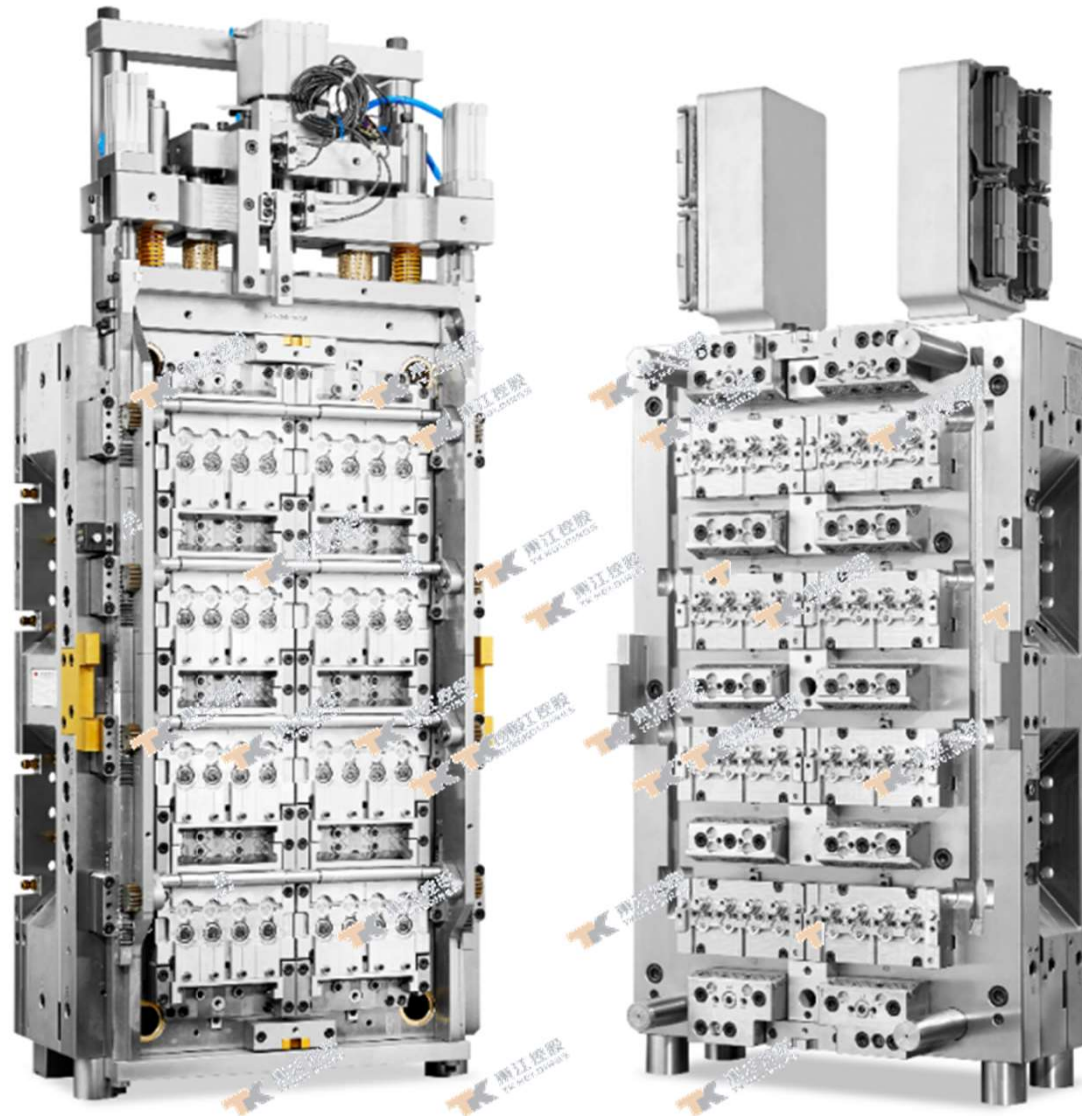


CAPS AND CLOUSURE



2K Pull Ring FT Cap

ø34*27mm, PP+PE, 5.1+1.65g

- Cavities: 12+12
- Mold Size: 700x 930 x 650mm
- Tonnage: 420 Ton
- Cycle Time: 17 Sec
- Highlights:
 - 10Weeks delivery from PO to shipment
 - Conformal cooling on critical insert
 - Cycle time reduce from 21 to 17s

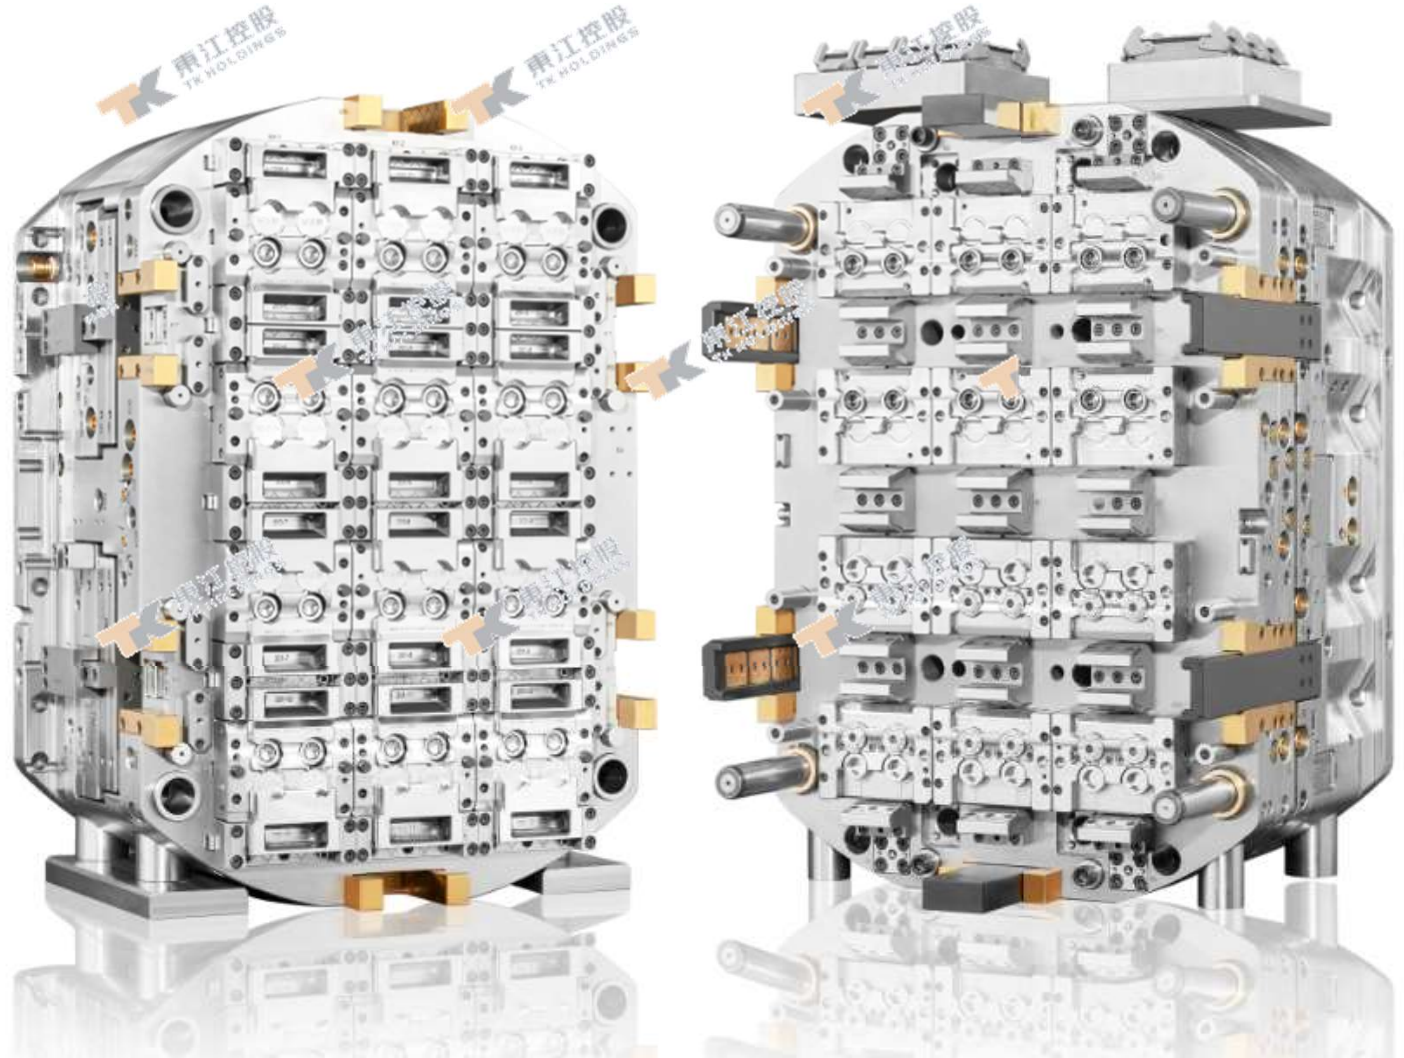

// Our Honor



PHILIPS
Award For
Sustainability
Improvement



Yihai Kerry Arawana
Award For Supplier
Excellence



Jabra
Award For Quality
supplier



LuxshareICT
Award For Excellent
technology supplier



Wahl clipper
Corporation
Award For 100 years
of tradition

Thank You!



www.tkmold.com



+86-755-2369 0000



sales@tkmold.com