



**Standing Digital Signage** KMI2000 Series (2000, 2100, 2200)

# Smart Floor Stand Kiosk Digital Signage



Android OS /  
Windows



7\*24 Hours  
Loop Play



Online Content  
Management



Support Full  
UHD 3840X2160



Tempered Glass  
Protection



**Standing Digital Signage** KMI2000 Series (43" / 50" / 55")

Suitable Anywhere for  
your ads



Windows /  
Android OS



7\*24 Hours  
Loop Play



Online Content  
Management



Support Full  
UHD 3840X2160



Easy To  
Repair

# Which KMI 2000 Series is Right for You ?



KMI 2000



KMI 2100



KMI 2200

	KMI 2000	KMI 2100	KMI 2200
Size	43" / 55" / 65"	43" / 55" / 65"	43" / 55" / 65"
Touchscreen	✖	Infrared Touchscreen	Capacitive Touchscreen
OS	Android / Windows	Android / Windows	Android / Windows
Android	Android 9.0 / 11.0	Android 9.0 / 11.0	Android 9.0 / 11.0
Windows	Win10 i5-4th (OPT)	Win10 i5-4th (OPT)	Win10 i5-4th (OPT)
Maximum Resolution	HD	4K	HD
RAM	2GB	2GB	2GB
Storage	8GB	8GB	8GB

## Compatibility of KMI 2000 Series for Diverse Scenarios



Showroom



Mall Area



Store

# KMI2000 Series

## Full HD Display

Experience Ultra HD 3840 x 2160 display, enhancing sharpness, depth, and subject-background separation.



## Durable and Fast repair window

Aluminum cabinet, Industrial grade power board, etc help to extend the machine life time. You have the fast repair window even the display have any issue.

## Intelligent Split Screen

Videos / Poster / Pictures can be played simultaneously, bid farewell to choice.


## Cloud Intelligent System

Remote control of the timer switch  
Real-time monitoring of the screen,  
one click advertising contents.

## Uninterrupted Work 24/7


Steel backplane, excellent heat dissipation, anti-interference design, lasting 365 days nonstop.

## Structure & Dimension View

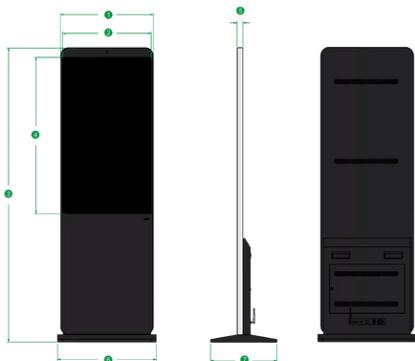

43"(mm)	1 622	2 530.5	3 1778	4 942.5	5 55
50"(mm)	6 650	7 403			
55"(mm)	1 766	2 682.4	3 1950	4 1211.6	5 48
65"(mm)	1 1801.50	2 30.60	3 81.50	4 700	5 604
50"(mm)	6 1073	7 800			
65"(mm)	1 2062.50	2 28.5	3 80	4 894	5 803
55"(mm)	6 1428	7 893			

## Body Structure

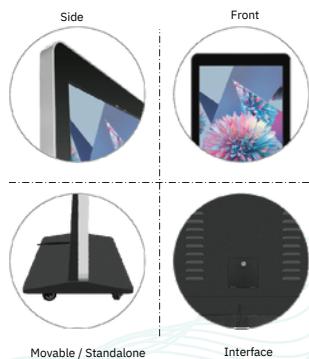



### Durable and Fast repair window

Aluminum cabinet, Industrial grade power board, etc help to extend the machine life time. You have the fast repair window even the display have any issue.



### Cloud Intelligent System

Remote control the timer Switch, real-time monitoring of the screen, one-click advertising contents.



### UHD Display with high brightness and Color Gamut

2160P resolution with 350cd/m<sup>2</sup> brightness and color gamut enhance, make your picture more actively.



### Tempered glass protection

It is an interactive device with fast and accurate touch. Meanwhile there is a 3mm hardened Safety Class(Mohs 7) Tempered glass protect the device.



### Intelligent Split Screen

Video/Poster/Picture can be played simultaneously.



### Echo UI design and fast operation

Deeply develop system with new Echo UI design, It is easier to setting and operation.

# PRODUCT INFORMATION

Size	43"	55"	65"	
Screen	 A diagram showing the dimensions of a 43-inch screen. The width is indicated by a horizontal double-headed arrow at the top labeled "528 mm". The height is indicated by a vertical double-headed arrow on the left labeled "906 mm".	 A diagram showing the dimensions of a 55-inch screen. The width is indicated by a horizontal double-headed arrow at the top labeled "680 mm". The height is indicated by a vertical double-headed arrow on the left labeled "1210 mm".	 A diagram showing the dimensions of a 65-inch screen. The width is indicated by a horizontal double-headed arrow at the top labeled "805 mm". The height is indicated by a vertical double-headed arrow on the right labeled "1431 mm".	
Display	Panel Brand	BOE	Connectivity	I/Os
	Brightness (nits)	350cd/m2		USB 1
	Resolution	1920x1080 or 3840x2160		USB 2
	Display Ratio	350cd/m2		LAN 1 (RJ45,10/100M self adaptive )
	Contrast	5000:1		HDMI IN
	Response Time	8ms		TF CARD
	Color	8ms		LINE OUT
	Uniformity of Backlight	75%		DC IN
	Backlight Type	ELED		
	Viewing Angle	178°(V)/178°(H)		
System	OS	CPU	Quad core A53,1.5GHz	Features
		System	Android 9.0	
		GPU	Mali450*4	
		DDR	1G	
		EMMC Flash	8G	
	USB Format	WI-FI	2.4GHz	Power
		Movie	MPEG2、AVI、MP4、DIV、TS、TP、TRP、MKV、	
		Music	MP3、MP2、WMA、WAV	
		Photo	JPEG、PNG	
	Audio	Text	WORD、EXCEL、POWERPOINT、PDF、TXT	
		Output	8W*2	Others
		Surround Sound	Yes	
Package	Product Size(mm)	1800*607*30.6 (32") / 1856.5*672.8*30.6 (43") / 1914.7*748.2*30.6 (55") / 2062.5*894*28.5 (65")	Speaker	2*5W
			Internet	WIFI, RJ45
			Package	Display * 1pcs, Base *1pcs, Power cord *1, User manual *1pcs, Warranty Card *1pcs, Key*1speed



**Standing Digital Signage** KMI2100 Series (43" / 50" / 55")

# Get Your Message Across More Effectively



Windows /  
Android OS



7\*24 Hours  
Loop Play



Online Content  
Management



Support Full  
UHD 3840X2160



Easy To  
Repair

# KMI2100 Series

## UHD Display

Experience Ultra HD 3840 x 2160 display, enhancing sharpness, depth, and subject-background separation.



## Durable and Fast repair window

Aluminum cabinet, Industrial grade power board, etc help to extend the machine lift time. You have the fast repair window even the display have any issue.

## Intelligent Split Screen

Videos / Poster / Pictures can be played simultaneously, bid farewell to choice.


## Cloud Intelligent System

Remote control of the timer switch  
Real-time monitoring of the screen,  
one click advertising contents.

## Uninterrupted Work

Steel backplane, excellent heat dissipation, anti-interference design, lasting 365 days nonstop.

## Structure & Dimension View

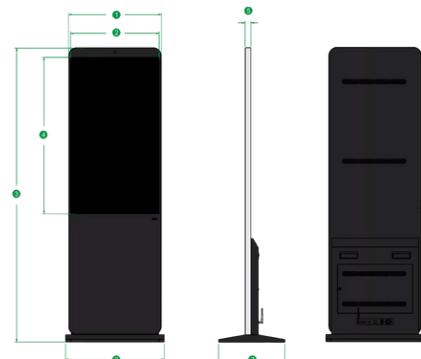




43"	① 622	② 530.5	③ 1778	④ 942.5	⑤ 55
	⑥ 650	⑦ 403			

55"	① 766	② 682.4	③ 1950	④ 1211.6	⑤ 48
	⑥ 790	⑦ 463			

65"	① 2062.50	② 28.5	③ 80	④ 894	⑤ 803
	⑥ 1428	⑦ 893			


## Rear View

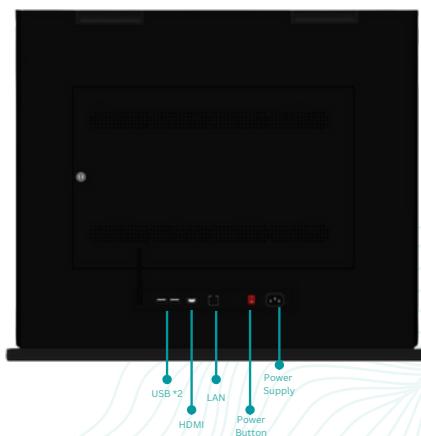

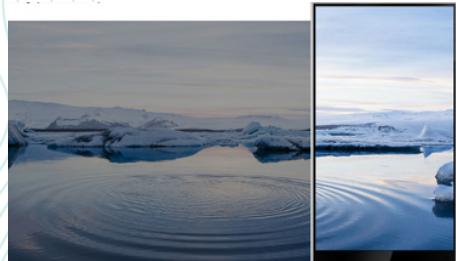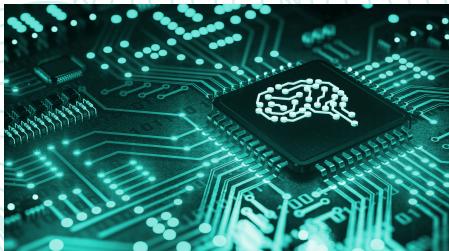

## Windows System i5 4<sup>th</sup> Gen

Stable Windows version with faster processing speed, the system smoothly than ever.

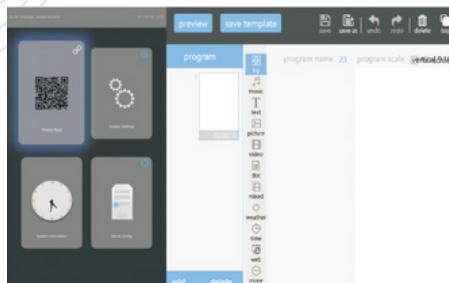

## Echo UI design and fast operation

Remote control the timer Switch, real-time monitoring of the screen, one-click advertising contents.

## Tempered glass protection


It is an interactive device with fast and accurate touch, Meanwhile there is a 3mm hardened Safety Class(Mohs 7) Tempered glass protect the device.



## Durable and Fast repair window


Aluminum cabinet, Industrial grade power board, etc help to extend the machine life time.

You have the fast repair window even the display have any issue.

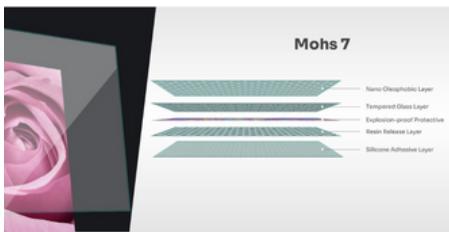

## Tempered glass protection and IR touch

It is an interactive device with fast and accurate touch, Meanwhile there is a 3mm hardened Safety Class (Mohs 7) Tempered glass protect the device.

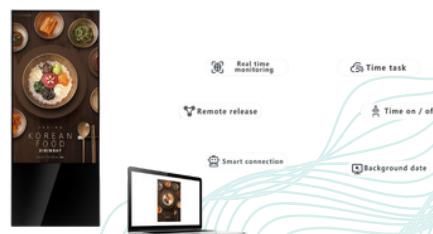

## Cloud Intelligent System

Remote control the timer Switch, real-time monitoring of the screen, one-click advertising contents.


# PRODUCT INFORMATION

Size	43"	55"	65"	
Screen	 A diagram showing the front view of a 43-inch digital signage screen. It includes a vertical dimension line of 969 mm and a horizontal dimension line of 528 mm.	 A diagram showing the front view of a 55-inch digital signage screen. It includes a vertical dimension line of 1210 mm and a horizontal dimension line of 680 mm.	 A diagram showing the front view of a 65-inch digital signage screen. It includes a vertical dimension line of 1431 mm and a horizontal dimension line of 805 mm.	
Display	Panel Brand	BOE	Connectivity	
	Brightness (nits)	350cd/m2	USB 1	2.0
	Resolution	1920x1080 or 3840x2160	USB 2	2.0
	Display Ratio	350cd/m2	LAN	1 (RJ45,10/100M self adaptive )
	Contrast	5000:1	HDMI IN	
	Response Time	8ms	TF CARD	
	Color	8ms	LINE OUT	
	UniformityofBacklight	75%	DC IN	
	Backlight Type	ELED		
	Viewing Angle	178°(V)/178°(H)		
System	LED Backlist Lifetime	≥60.000hrs	Wifi	802.11b/gn
	Touch Technology	IR Touchscreen	Features	Display
	OS	CPU		Landscape/Portrait, Split Screen Display, Video, Picture etc
		System		Edit, Schedule, Remote Publish(option), Object Carousel, etc
		GPU		Program Management
		SSD		Power Management
		EMMC Flash		Yes
	USB Format	WI-FI		Power Supply
		1.2.4GHz		Max power consumption
		Movie		Standby power consumption
		TS, TP, TRP, MKV,		Operation Temperature
Others	Audio	Music	Touchscreen	Storage Temperature
		MP3, MP2, WMA, WAV		Working Humidity
		Photo		Touch screen
	Text	JPEG, PNG		10 points Infrared
		WORD, EXCEL, POWERPOINT, PDF, TXT		Touchscreen power supply system
	Speaker	Output		USB direct powersupply (+4.75 to +5.25)
		Surround Sound		Minimum touch body
	Internet	Yes		2*USD2.0
				Surface hardness
				6mm
	Package	Speaker 2*5W		Positioning accuracy
		Internet WIFI, RJ45		Reponse speed
		Display * 1pcs, Base *1pcs, Power cord *1, User manual *1pcs, Warranty Card *1pcs, Key*1speed		Touch pressure
				Cursor speed
				Computer response
				Automatic recognition



**Standing Digital Signage** KMI2200 Series (43" / 50" / 55")

# Smart Floor Stand Kiosk Digital Signage



HD  
1920 X 1080



7\*24 Hours  
Loop Play



CMS



intelligent  
Split Screen



Vertile  
Touchscreen

# KMI2200 Series

## HD Display

1080P Full HD Display, by separating sharpness and depth of field, separating the subject and background and adjusting their contrast range, color and sharpness, and the delicate color recognition effect is more vivid and more realistic.

## CMS

streamlines the creation, editing, and publishing of content. Provides a single source of truth for all digital content.



## Intelligent Split Screen

Allows users to view and interact with multiple applications or documents simultaneously.


## High Brightness

The color is exquisite and beautiful, the picture is vivid, and the true color is restored under various lighting conditions.

## Uninterrupted Work 24/7


maximizes the impact of the digital signage by ensuring it's always on and displaying the latest information.

## Structure & Dimension View

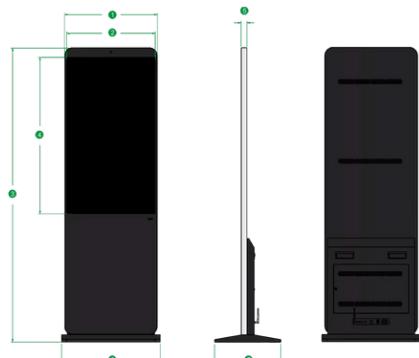

43"	① 622	② 530.5	③ 1778	④ 942.5	⑤ 55
65"	⑥ 650	⑦ 403			
55"	① 766	② 682.4	③ 1950	④ 1211.6	⑤ 48
65"	⑥ 790	⑦ 463			
65"	① 2062.50	② 28.5	③ 80	④ 894	⑤ 803
65"	⑥ 1428	⑦ 893			

## CMS & USB Disk Play

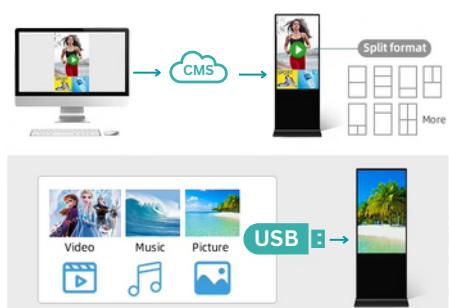



## Tempered Glass Protect

Special Tempering treatment is safe can prevent scratches for a long time. Anti-glare surface treatment, to remove residual image, so that the picture is not distorted, the picture quality is not disturbed.



## Cloud Intelligent System

Remote control the timer Switch, real-time monitoring of the screen, one-click advertising contents.



DC IN	USB 2.0	USB 2.0	RJ45	HDMI IN	TF CARD	LINE OUT
-------	---------	---------	------	---------	---------	----------

## Interface Reference

Various interfaces such as USB, RJ45, HDMI, TF CARD, SIM CARD, LINE OUT, WIFI, etc. Meets various application requirements.



## Intelligent Split Screen

Videos/Poster/Pictures can be played simultaneously, bid farewell to choice.



## Intelligent Split Screen

Video/Poster/Picture can be played simultaneously.



## Cloud Intelligent System

Capacitive touch screen, support for multi-touch, touch query and other functions.

# PRODUCT INFORMATION

Size	43"	55"	65"		
Screen	 A diagram showing the dimensions of a 43-inch screen. The width is indicated by a horizontal double-headed arrow at the top, labeled 528 mm. The height is indicated by a vertical double-headed arrow on the right, labeled 969 mm.	 A diagram showing the dimensions of a 55-inch screen. The width is indicated by a horizontal double-headed arrow at the top, labeled 680 mm. The height is indicated by a vertical double-headed arrow on the right, labeled 1210 mm.	 A diagram showing the dimensions of a 65-inch screen. The width is indicated by a horizontal double-headed arrow at the top, labeled 805 mm. The height is indicated by a vertical double-headed arrow on the right, labeled 1431 mm.		
Display	Panel Brand	BOE	Connectivity		
	Brightness (nits)	350cd/m2	USB 1	2.0	
	Resolution	1920x1080 or 3840x2160	USB 2	2.0	
	Display Ratio	350cd/m2	LAN	1 (RJ45,10/100M self adaptive )	
	Contrast	5000:1	HDMI IN		
	Response Time	8ms	TF CARD		
	Color	8ms	LINE OUT		
	UniformityofBacklight	75%	DC IN		
	Backlight Type	ELED			
	Viewing Angle	178°(V)/178°(H)			
System	LED Backlist Lifetime	≥60.000hrs	Features	Wifi	802.11b/gn
	Touch Technology	Non Touch		Display	Landscape/Portrait, Split Screen Display, Video, Picture etc
	OS	CPU		Program Management	Edit, Schedule, Remote Publish(option), Object Carousel, etc
		System		Power Management	Yes
		GPU		Power Supply	AC100~240V, 50/60Hz
		DDR		Max power consumption	≤220W
		EMMC Flash		Standby power consumption	≤1W
Others	USB Format	WI-FI		Operation Temperature	0°C~50°C
		Movie		Storage Temperature	85%
		TS, TP, TRP, MKV,		Working Humidity	0% - 90%
		Music		Touch screen	10 points Capacitive
		MP3, MP2, WMA, WAV		Touchscreen power supply system	USB direct powersupply (+4.75 to +5.25)
	Audio	Photo	Power	Minimum touch body	2*USD2.0
		JPEG, PNG		Surface hardness	6mm
	Speaker	Text		Positioning accuracy	6mm
		WORD, EXCEL, POWERPOINT, PDF, TXT		Reponse speed	≤8ms
	Internet	Output		Touch pressure	no requirement
		Surround Sound		Cursor speed	≥120 min/sec
		Yes		Computer response	Automatic recognition
	Package	Speaker	Touchscreen		
		Internet			
		Display * 1pcs, Base *1pcs,Power cord *1, User manual *1pcs, Warranty Card * 1pcs, Key*1speed			



**MJ SOLUTION INDONESIA**

Explore. Create. Inspire.



**PT MJSolusi Teknologi Multimedia**

The Mansion Bougenville Kemayoran Tower Fontana Zona I Lantai 50 BF50 D1,  
Jakarta Utara, Indonesia

+622182623313

@Mjsolutionid

[MJSolution.co.id](http://MJSolution.co.id)



Our Website



E-Catalogue