

**All-in-One Kiosk Solutions** KMI4000 Series (4000, 4100)

# Complete Solutions for a Smarter Display



7 x 24 Hours  
Loop Play



Intelligent  
Split Screen



Online Content  
Management



Tempered Glass  
Protection



Support Full  
UHD

# Find Your Perfect Match!



**KMI 4000**

Size **43" / 55" / 65" / 75"**

Touchscreen **✖**

OS

Android 9.0

Brightness

350cd/m<sup>2</sup>

Display Ratio

16 : 9

Resolution FHD 1920 x 1080 pixels

**KMI 4100**

**43" / 55" / 65"**

Infrared Touchscreen

Android 9.0

350cd/m<sup>2</sup>

16 : 9

UHD 3840 x 2160 pixels

Contrast Ratio 3000 : 1

5000 : 1

Screen Orientation Portrait & Landscape

Viewing Angle 178° (V) / 178° (H)

## Best Implementation of KMI 4000 Series



Restaurant



Mall Area



Office



Wall Mounted Signage KMI4000 (43" / 55" / 65" / 75")

New Advertising Solutions  
to Create More Value



High  
Brightness



7 x 24 Hours  
Loop Play



Online Content  
Management



Support Full  
HD 1080P



Intelligent  
Split Screen

# KMI4000 SERIES

## High Brightness

The color is exquisite and beautiful, the picture is vivid, the true color is restored under various lighting condition.



## Instant Sharing Via QR Code

Share content seamlessly by scanning the QR code, simplifying interactions in meetings and schools.

## Presentation & Annotation at Your Fingertips

Supports writing, page turning, real time annotation, zoom in and out, mobile roaming and gesture.

## Uninterrupted Work

Steel backplane, excellent heat dissipation, anti-interference design, lasting 365 days nonstop.

## Tempered Glass

Strong, stable and durable that can help prevent scratches.

## Implementation




Hanging



Potrait



Landscape



43"(mm)									
1	577	2	80	3	988	4	943	5	530
6	300	7	300						




65"(mm)									
1	854	2	58	3	1478	4	1428	5	803
6	400	7	300						

55"(mm)									
1	729	2	80	3	1258	4	1210	5	682
6	400	7	400						

75"(mm)									
1	992	2	59	3	1717	4	1660	5	934
6	467	7	300						

# Features

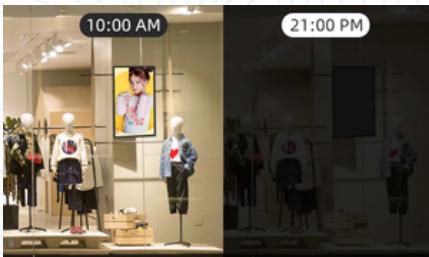


## Timer Switch

Time Setting of Automatic Switch On / Off All-Steel backplane, good heat dissipation, anti interference, longer service life, 365 days of continuous power work




## Picture Rendering

Unique Unprecedented frame design, support both horizontal an vertical display modes, can also be combined to provide greater design flexibility

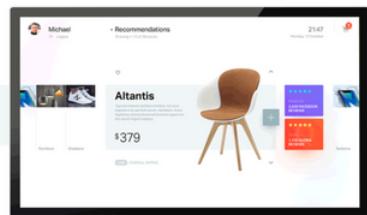

## Split Screen


Free to set up split screen, multicast on a machine (video, picture, and information) in the same screen.

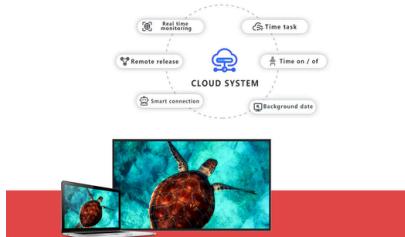

## Cloud Intelligent System

Remote control of the timer switch Real-time monitoring of the screen, one click advertising contents.

## Implementation



Hanging



Portrait



Landscape

# Product Information

Size	43"	55"	65"	75"
Screen Size	 943 mm 595 mm	 1210 mm 695 mm	 1428 mm 803 mm	 1660 mm 935 mm
Display	Brightness (nits) Resolution Display Ratio Contrast Ratio Backlight Type Viewing Angle Orientation	350cd/m <sup>2</sup> 1920 x 1080 16:9 3000:1 ELED 178°(V)/178°(H) Portrait/Landscape	<b>Connectivity</b>  <b>I/O</b> USB1 USB2 LAN Micro SD HDMI AC Input	USB2.0 USB2.0 1 1 HDMI In 110 V - 240 V
System	<b>OS</b> Operation System CPU frequency DDR Flash Wifi	Android 9.0 RK3568, 2.0GHz 1GB 8GB Dual Band 2.4GHz	<b>Environment</b>  <b>Touch</b> Operating temperature Storage temperature Operating humidity Storage Humidity	802.11b/gn 0 to 40°C -20 to 60°C 10% to 90% RH 20% to 85% RH
	<b>Media Player</b> Movie Music Picture Text	MPEG1/MPEG2/MPEG4/ AVI/VOB/MOV MP2/MP3/WMA/WAV BMP/JPEG /PNG/ GIF WORD, EXCEL, POWERPOINT ,PDF ,TXT	<b>Touch</b>  <b>Electricity</b> Screen Protection Split Screen Power Supply Maximum power (W) Standby power (W) Speaker	Non Touchscreen Tempered Glass - 3 mm Yes AC100~240V/50-60 Hz ≤82 <0.5 Yes



Digital Kiosk Signage KMI4100 (43" / 55" / 65")

Connect with your Audience  
with digital kiosk signage



Android 9.0



UHD 2160P



Online Content  
Management



Support Full  
HD 1080P



Intelligent  
Split Screen

# KMI4100 SERIES

## Full HD Display

Experience Full HD 1080p display, enhancing sharpness, depth, and subject-background separation.



## Intelligent Split Screen

Videos / Poster / Pictures can be played simultaneously, bid farewell to choice



## Cloud Intelligent System

Remote control of the timer switch Real-time monitoring of the screen, one click advertising contents.



## Uninterrupted Work

All-Steel backplane, good heat dissipation, anti interference, longer service life, 365 days of continuous power work

## Brightness & Dynamic Contrast

The color is exquisite and beautiful, the picture is vivid, the true color is restored under various lighting condition

## Structure & Dimension View

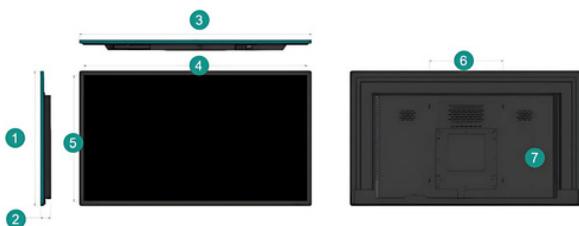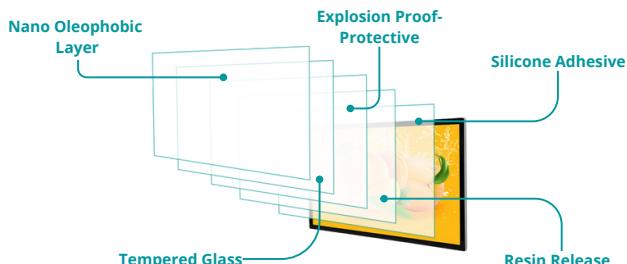


43"(mm)	1 577	2 54	3 988	4 941	5 530
	6 300	7 300			

55"(mm)	1 728	2 54	3 1258	4 1211	5 683
	6 300	7 300			


65"(mm)	1 855	2 57	3 1477	4 1428	5 805
	6 400	7 300			

# Features

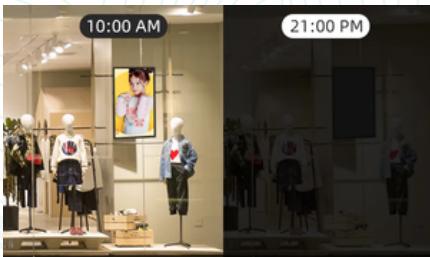

## Timer Switch

Time Setting of Automatic Switch On / Off All-Steel backplane, good heat dissipation, anti interference, longer service life, 365 days of continuous power work

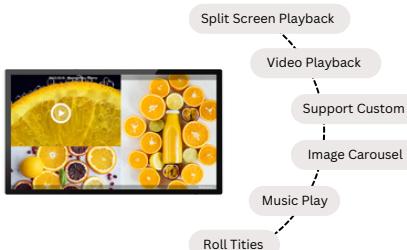

## Intelligent Split Screen

Effortlessly display videos, posters, and pictures all at once. Say goodbye to compromises and hello to versatility.



## Infrared Touchscreen

It is an interactive device with fast and accurate touch. This technology uses invisible infrared light beams to detect touch inputs.



## Cloud Intelligent System

Remote control of the timer switch Real-time monitoring of the screen, one click advertising contents.

## Implementation



Hanging



Portrait



Landscape



Bracket

# Product Information

Size	43"	55"	65"																																															
Screen Size	A diagram showing a 43-inch screen with a width of 943 mm and a height of 530 mm. The screen is centered on a white background with wavy patterns. <p>943 mm</p> <p>530 mm</p>	A diagram showing a 55-inch screen with a width of 1210 mm and a height of 829 mm. The screen is centered on a white background with wavy patterns. <p>1210 mm</p> <p>829 mm</p>	A diagram showing a 65-inch screen with a width of 1428 mm and a height of 895 mm. The screen is centered on a white background with wavy patterns. <p>1428 mm</p> <p>895 mm</p>																																															
Display	<table><tr><td>Brightness (nits)</td><td>350cd/m2</td></tr><tr><td>Resolution</td><td>3840 x 2160</td></tr><tr><td>Display Ratio</td><td>16:9</td></tr><tr><td>Contrast Ratio</td><td>5000:1</td></tr><tr><td>Backlight Type</td><td>ELED</td></tr><tr><td>Viewing Angle</td><td>178°(V)/178°(H)</td></tr><tr><td>Orientation</td><td>Portrait/Landscape</td></tr></table>	Brightness (nits)	350cd/m2	Resolution	3840 x 2160	Display Ratio	16:9	Contrast Ratio	5000:1	Backlight Type	ELED	Viewing Angle	178°(V)/178°(H)	Orientation	Portrait/Landscape	<p><b>Connectivity</b></p> <table><tr><td>USB1</td><td>USB2.0</td></tr><tr><td>USB2</td><td>USB2.0</td></tr><tr><td>LAN</td><td>1</td></tr><tr><td>Micro SD</td><td>1</td></tr><tr><td>HDMI</td><td>HDMI In</td></tr><tr><td>AC Input</td><td>110 V - 240 V</td></tr></table> <p><b>Wi-Fi</b></p> <table><tr><td>802.11b/g/n</td></tr></table>	USB1	USB2.0	USB2	USB2.0	LAN	1	Micro SD	1	HDMI	HDMI In	AC Input	110 V - 240 V	802.11b/g/n	<p><b>I/O</b></p> <table><tr><td>USB1</td><td>USB2.0</td></tr><tr><td>USB2</td><td>USB2.0</td></tr><tr><td>LAN</td><td>1</td></tr><tr><td>Micro SD</td><td>1</td></tr><tr><td>HDMI</td><td>HDMI In</td></tr><tr><td>AC Input</td><td>110 V - 240 V</td></tr></table>	USB1	USB2.0	USB2	USB2.0	LAN	1	Micro SD	1	HDMI	HDMI In	AC Input	110 V - 240 V								
Brightness (nits)	350cd/m2																																																	
Resolution	3840 x 2160																																																	
Display Ratio	16:9																																																	
Contrast Ratio	5000:1																																																	
Backlight Type	ELED																																																	
Viewing Angle	178°(V)/178°(H)																																																	
Orientation	Portrait/Landscape																																																	
USB1	USB2.0																																																	
USB2	USB2.0																																																	
LAN	1																																																	
Micro SD	1																																																	
HDMI	HDMI In																																																	
AC Input	110 V - 240 V																																																	
802.11b/g/n																																																		
USB1	USB2.0																																																	
USB2	USB2.0																																																	
LAN	1																																																	
Micro SD	1																																																	
HDMI	HDMI In																																																	
AC Input	110 V - 240 V																																																	
System	<table><tr><td><b>OS</b></td><td>Operation System</td><td>Android 9.0</td></tr><tr><td></td><td>CPU frequency</td><td>RK3568, 2.0GHz</td></tr><tr><td></td><td>DDR</td><td>1GB</td></tr><tr><td></td><td>Flash</td><td>8GB</td></tr><tr><td></td><td>Wifi</td><td>Dual Band 2.4GHz</td></tr></table> <table><tr><td><b>Media Player</b></td><td>Movie</td><td>MPEG1/MPEG2/MPEG4/AVI/VOB/MOV</td></tr><tr><td></td><td>Music</td><td>MP2/MP3/WMA/WAV</td></tr><tr><td></td><td>Picture</td><td>BMP/JPEG /PNG/ GIF</td></tr><tr><td></td><td>Text</td><td>WORD, EXCEL, POWERPOINT , PDF , TXT</td></tr></table>	<b>OS</b>	Operation System	Android 9.0		CPU frequency	RK3568, 2.0GHz		DDR	1GB		Flash	8GB		Wifi	Dual Band 2.4GHz	<b>Media Player</b>	Movie	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV		Music	MP2/MP3/WMA/WAV		Picture	BMP/JPEG /PNG/ GIF		Text	WORD, EXCEL, POWERPOINT , PDF , TXT	<p><b>Environment</b></p> <table><tr><td>Operating temperature</td><td>0 to 40°C</td></tr><tr><td>Storage temperature</td><td>-20 to 60°C</td></tr><tr><td>Operating humidity</td><td>10% to 90% RH</td></tr><tr><td>Storage Humidity</td><td>20% to 85% RH</td></tr></table> <p><b>Touch</b></p> <table><tr><td>Screen Protection</td><td>Tempered Glass - 4 mm</td></tr><tr><td>Split Screen</td><td>Yes</td></tr></table> <p><b>Electricity</b></p> <table><tr><td>Power Supply</td><td>AC100~240V/50-60 Hz</td></tr><tr><td>Maximum power (W)</td><td>≤82</td></tr><tr><td>Standby power (W)</td><td>&lt;0.5</td></tr><tr><td>Speaker</td><td>Yes</td></tr></table>	Operating temperature	0 to 40°C	Storage temperature	-20 to 60°C	Operating humidity	10% to 90% RH	Storage Humidity	20% to 85% RH	Screen Protection	Tempered Glass - 4 mm	Split Screen	Yes	Power Supply	AC100~240V/50-60 Hz	Maximum power (W)	≤82	Standby power (W)	<0.5	Speaker	Yes	
<b>OS</b>	Operation System	Android 9.0																																																
	CPU frequency	RK3568, 2.0GHz																																																
	DDR	1GB																																																
	Flash	8GB																																																
	Wifi	Dual Band 2.4GHz																																																
<b>Media Player</b>	Movie	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV																																																
	Music	MP2/MP3/WMA/WAV																																																
	Picture	BMP/JPEG /PNG/ GIF																																																
	Text	WORD, EXCEL, POWERPOINT , PDF , TXT																																																
Operating temperature	0 to 40°C																																																	
Storage temperature	-20 to 60°C																																																	
Operating humidity	10% to 90% RH																																																	
Storage Humidity	20% to 85% RH																																																	
Screen Protection	Tempered Glass - 4 mm																																																	
Split Screen	Yes																																																	
Power Supply	AC100~240V/50-60 Hz																																																	
Maximum power (W)	≤82																																																	
Standby power (W)	<0.5																																																	
Speaker	Yes																																																	



## MJ SOLUTION INDONESIA

Explore. Create. Inspire.



### PT MJSolusi Teknologi Multimedia

The Mansion Bougenville Kemayoran Tower Fontana Zona I Lantai 50 BF50 D1,  
Jakarta Utara, Indonesia

+62811122492

@Mjsolutionid

[MJSolution.co.id](http://MJSolution.co.id)



Our Website



E-Catalogue