



Video Wall (LFD) KMI8000 (46" / 55" / 65")

Unleash Your Message with Video Wall Displays



Support Wi-Fi



High
brightness



Intelligent
Split Screen



7 x 24 Hours
Loop Play

KMI 8000

Resolution 1920 x 1080

1080P full HD display for vivid and realistic visuals with enhanced sharpness, depth of field, and color recognition.



Wide Viewing Angle

178° from all directions. Capture and delight more audiences.

Synchronization

Under high refreshing frequency, image switch smoothly, without delaying.

Brilliant colors

Wider color coverage, higher reduction, professional-grade rendering, and improved stability.

7 x 24H x 365

Manage and control your display all time in any hour or day with uninterrupted work.



High Brightness



Content Management System




Slim Bezel-to-Bezel




Uninterrupted Work


Application



Office or Company




Control Room




Shopping Mall

Features

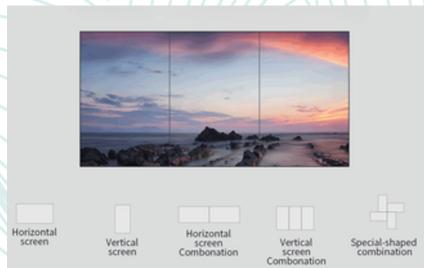


Flexible Picture Rendering

Support for horizontal screen, vertical screen, special-shaped splicing and other splicing modes, providing greater design flexibility.

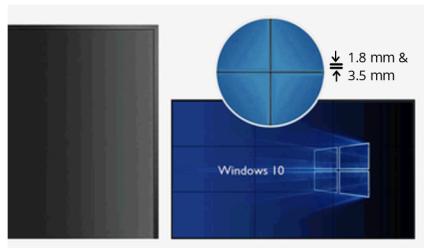

As Close As It Gets

With slimmest bezel at 1.8 mm and 3.5 mm bezel-to-bezel.

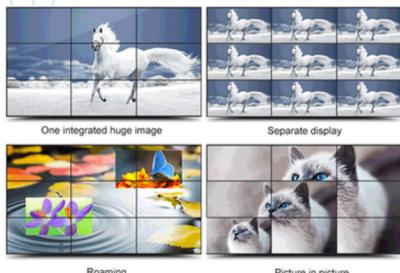

Abundant Display Patterns

Self-adjust tech keeps image in good shape and maintain good image ratio.



Cloud Intelligent System

Remote control the timer switch, real-time monitoring of the screen, one-click advertising contents.

Implementation



On Wall



With Bracket



With Customizable Frame

Product Information



SPECIFICATION

Brightness	500 cd/m ²		700 cd/m ²		
B2B	1,8 mm	3,5 mm	1,8 mm	3,5 mm	
Unit Size (mm)	46"	1,075 (W) x 606 (H) x 54 (D)	1,077 (W) x 608 (H) x 54 (D)	1,075 (W) x 606 (H) x 55 (D)	1,077 (W) x 608 (H) x 54 (D)
	55"	1,211 (W) x 682 (H) x 39 (D)	1,213 (W) x 684 (H) x 39 (D)	1,211 (W) x 682 (H) x 39 (D)	1,213 (W) x 684 (H) x 39 (D)
	65"	-	1,432.58 (W) x 807.62 (H)	-	-
Panel	Resolution	FHD 1920 x 1080			
	Contrast Ratio	4000 : 1			
	Aspect Ratio	16 : 9			
	Display Color	8 bit / 16.7 M			
	Color Gamut	72%			
	Response Time	8 ms			
	Viewing Angle	178°(H) / 178°(V)			
	H-Scanning Frequency	30 kHz ~ 81 kHz			
	V-Scanning Frequency	48Hz ~ 75Hz			
Connectivity	Audio In/Out	Stereo Mini Jack			
	Video In	HDMI1, HDMI2			
Power	Power Supply	AC 100 - 240 V / 50 - 60 Hz			
	Power Consumption (On)	≤180 W			
	Standby Power	3W			
Environment	Operation Temperature	0 ~ 50 °C			
	Storage Temperature	-20 ~ 65 °C			
	Operation	24/7			



MJ SOLUTION INDONESIA

Explore. Create. Inspire.



PT MJSolusi Teknologi Multimedia

The Mansion Bougenville Kemayoran Tower Fontana Zona I Lantai 50 BF50 D1,
Jakarta Utara, Indonesia

+62811122492

@Mjsolutionid

MJSolution.co.id



Our Website



E-Catalogue