
FLORTEK®

TESTED AS PER BSEN 124:1994

CERTIFIED QUALITY

MAKE IN INDIA

# FRP MANHOLE COVER

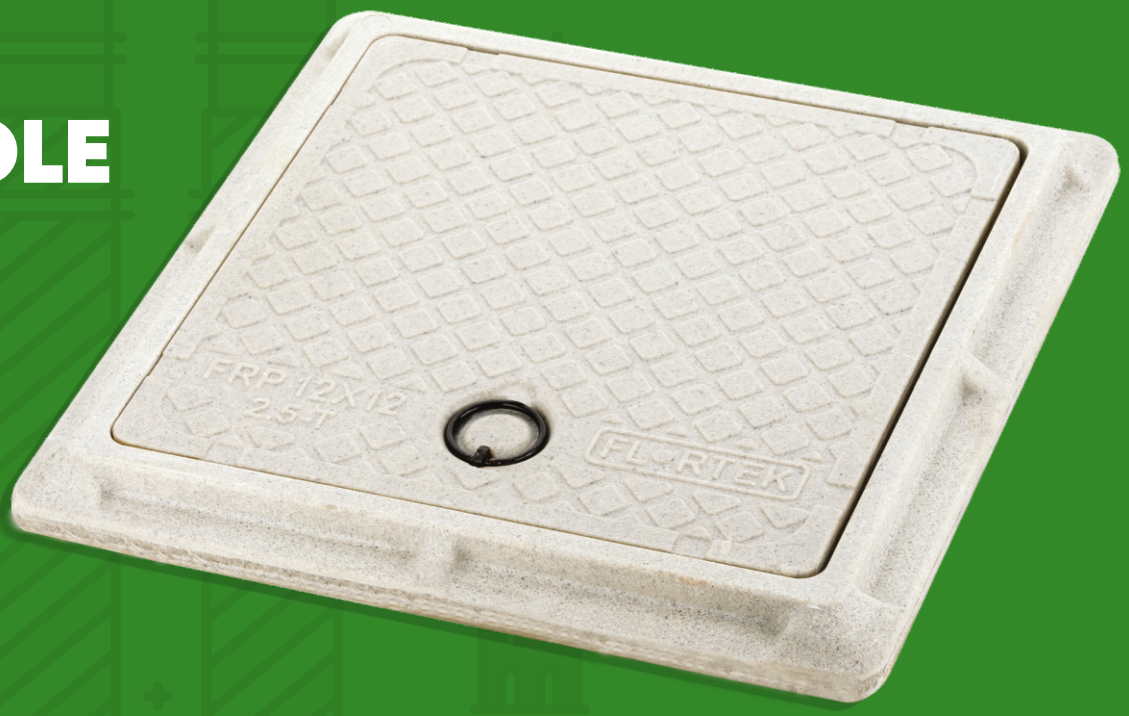


## THE BEST AT AFFORDABLE

MAKE IN INDIA

**FLORTEK INDUSTRIES PRIVATE LIMITED**

FLORTEK®

# Available Size Range

| | | Outer Frame Size | | Frame Clear Opening | |
|---|---|---|---|---|---|
| | | MM | Inch | MM | Inch |
| 2.5 & 5.0 Tonnes (Light & Medium Duty) | Square | 250 X 250 | 10 X 10 | 200 X 200 | 8 X 8 |
| | | 300 X 300 | 12 X 12 | 250 X 250 | 10 X 10 |
| | | 380 X 380 | 15 X 15 | 300 X 300 | 12 X 12 |
| | | 450 X 450 | 18 X 18 | 380 X 380 | 15 X 15 |
| | | 500 X 500 | 20 X 20 | 380 X 380 | 15 X 15 |
| | | 535 X 535 | 21 X 21 | 450 X 450 | 18 X 18 |
| | | 600 X 600 | 24 X 24 | 500 X 500 | 20 X 20 |
| | | 660 X 660 | 26 X 26 | 560 X 560 | 22 X 22 |
| | | 700 X 700 | 28 X 28 | 600 X 600 | 24 X 24 |
| | | 750 X 750 | 30 X 30 | 660 X 660 | 26 X 26 |
| | | 800 X 800 | 32 X 32 | 700 X 700 | 28 X 28 |
| | | 900 X 900 | 36 X 36 | 750 X 750 | 30 X 30 |
| | | 1070 X 1070 | 42 X 42 | 900 X 900 | 36 X 36 |
| 2.5 & 5.0 Tonnes (Light & Medium Duty) | Rectangle | 230 X 300 | 9 X 12 | 165 X 235 | 7 X 10 |
| | | 300 X 380 | 12 X 15 | 230 X 300 | 9 X 12 |
| | | 300 X 450 | 12 X 18 | 230 X 390 | 9 X 16 |
| | | 300 X 600 | 12 X 24 | 230 X 510 | 9 X 20 |
| | | 450 X 600 | 18 X 24 | 350 X 500 | 14 X 20 |
| | | 535 X 700 | 21 X 28 | 450 X 600 | 18 X 24 |
| | | 600 X 750 | 24 X 30 | 500 X 660 | 20 X 26 |
| | | 450 X 900 | 18 X 36 | 350 X 800 | 14 X 32 |
| | | 600 X 900 | 24 X 36 | 500 X 800 | 20 X 32 |
| | | 750 X 900 | 30 X 36 | 660 X 750 | 26 X 30 |
| | | 600 X 1065 | 24 X 42 | 450 X 900 | 18 X 36 |
| | | 785 X 1065 | 31 X 42 | 600 X 900 | 24 X 36 |
| | Round | 400 | 16 | 300 | 12 |
| | | 450 | 18 | 350 | 14 |
| | | 500 | 20 | 400 | 16 |
| | | 600 | 24 | 500 | 20 |
| | | 710 | 28 | 600 | 24 |

## ADVANTAGES & FEATURES

FLORTEK®

- Water Proof, Weather Proof & Non Corrosive
- Chemical & Slip Resistance
- Burglar Proof
- Light Weight
- Zero Scrap Value
- High Strength to Weight Ratio
- Thermal & Electrical Non Conductivity
- Easy Handling
- Long Life

### SALIENT FEATURES

- Our Products are Provided with Double Seal
- Our Products are with Closed Key Hole To Prevent Foul Smell
- Our Products Have Option For Locking Facilities Upon Request
- Customized Colour Options Available On Request

# HEAVY DUTY MANHOLE COVER

| Load Capacity | Frame Clear Opening | |
|---|---|---|
| | MM | INCH |
| B125/12.5T, C250/25.0T & D400/40T | 300 X 300 | 12 X 12 |
| | 450 X 450 | 18 X 18 |
| | 600 X 600 | 24 X 24 |
| | 750 X 750 | 30 X 30 |
| | 900 X 900 | 36 X 36 |
| | 450 X 600 | 18 X 24 |
| | 450 X 900 | 18 X 36 |
| | 600 X 900 | 24 X 36 |
| | 600 | 24 |







| Outer Frame Size | | Frame Clear Opening | | Cover Dimension | | Load Application |
|---|---|---|---|---|---|---|
| MM | INCH | MM | INCH | MM | INCH | |
| 300 X 300 | 12 X 12 | 250 X 250 | 10 X 10 | 265 X 265 | 10 X 10 | Pedestrian & Two Wheeler |
| 450 X 450 | 18 X 18 | 350 X 350 | 14 X 14 | 395 X 395 | 15 X 15 | |
| 550 X 550 | 22 X 22 | 450 X 450 | 18 X 18 | 500 X 500 | 20 X 20 | |
| 380 X 380 | 15 X 27 | 250 X 560 | 10 X 22 | 300 X 600 | 12 X 24 | |
| 500 X 660 | 20 X 26 | 380 X 535 | 15 X 21 | 450 X 600 | 18 X 24 | |







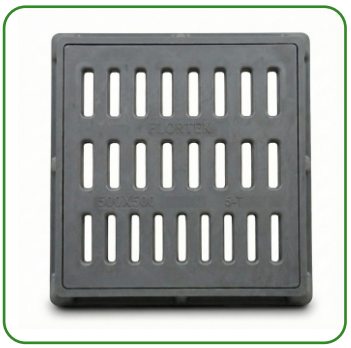



# FRP/GRP RECESSED MANHOLE COVER

| Load Capacity | Recess Depth : 35 MM & 65 MM | |
|---|---|---|
| | Frame Clear Opening | |
| | MM | Inch |
| 2.5 & 5.0 Tonnes | 300 X 300 | 12 X 12 |
| | 450 X 450 | 18 X 18 |
| | 600 X 600 | 24 X 24 |















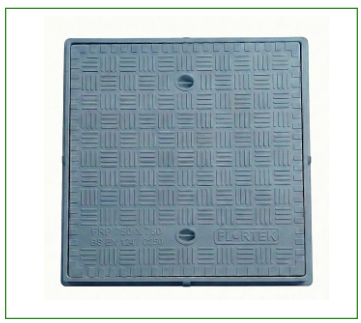


## COMPARISON

| Description | Flortek | RCC | Cast Iron |
|---|---|---|---|
| Life | High | Low | Moderate |
| Corrosion Resistance | High | Medium | Low |
| Strength To Weight Ratio | High | Low | Moderate |
| Scrap Value | Nil | Low | High |
| Colour | Wide Range | Concrete Grey | Black / Metallic |
| Finish | Fine | Poor | Rough |
| Abrassion Resistance | Yes | None | None |
| Cost | Comparable To CI | Low | Moderate |
| Handling | Easy | Very Difficult | Difficult |

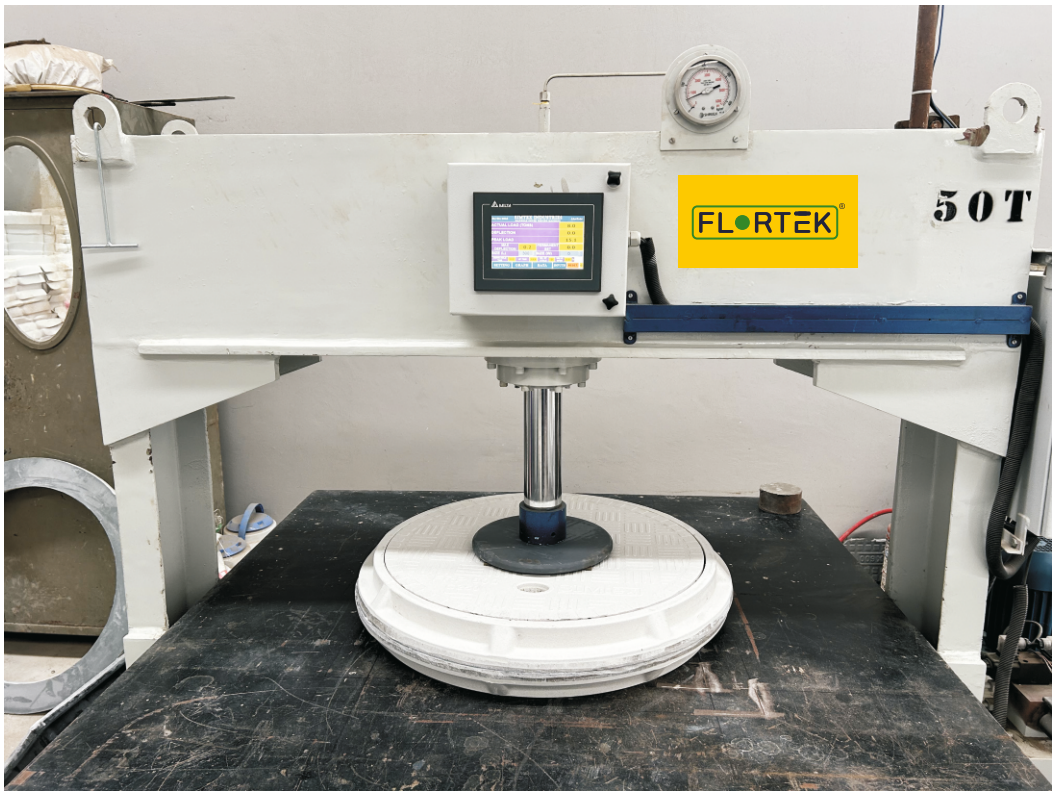


## IN HOUSE POINT LOAD TESTING FACILITY

## THE LIABILITY

**Why People Prefer Flortek frp Cover ?**

Manhole covers made out of cast iron installed on the roads & the respective sites tend to get stolen away due to its higher scrap value. The result of getting cast iron manhole cover being stolen creates unmanageable hassle for daily commuters on road and other installed areas. This creates a huge problem in our daily routine as below.







# FRP/GRP MOULDED GRATINGS

## WHY FRP/GRP GRATINGS ?

**Corrossion Resistant -** It Gives Resistance Against Almost All Chemicals & In Most Hostile Environments.

**Light Weight -** Density Compared To Steel Is 4 Times Less.

**Non Conductive -** It Does Not Carry Any Electric Current.

**Impact Resistance -** Returns To Original Position Without Any Permanent Deflection Or Distortion.

**Dimensional Stability -** The Coefficient Of Thermal Expansion Of Pultruded Products Are Marginally Very Less Then Aluminum And Steel.

**Maintenance Free -** No Rework Like Painting Or Cleaning Required.

**Life Cycle -** Long Durability Ensures Lowest In Life Cycle Cost.

**Easy To Install -** No Welding Required While Installing.Uv Resistant - Inbuilt Uv Resistance Gives Protection From Direct Sunlight Exposure.

**Low Instalation Cost -** Being Light Weight, It Can Be Installed By Anybody Easily.

**No Rusting No Painting -** Required As The Colour is Inbuilt And Different Colour Options Are Available To Suit Your Plant Colour.


Very High Strength To Weight Ratio Which Helps In Structural Saving.

High Impact & Fatigue Strength.


Fire Retardant.

Resistant To Chipping & Cracking.

Aesthetically Pleasing Appearance.

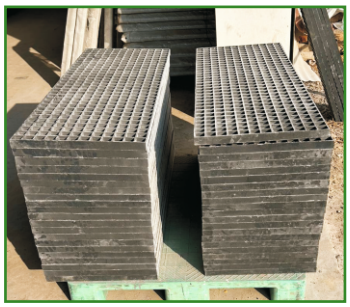



| Legend | Thickness (mm) | Bar Thickness (Top/Bottom) | Mesh Size (mm) | Pannel Size (mm) |
|---|---|---|---|---|
|  | 25 | 7.0/5.0 | 38x38 | 1220x3660 |
| | 30 | 7.0/5.0 | 38x38 | 1220x3660 |
| | 38 | 7.0/5.0 | 38x38 | 1220x3660 |

**Available Dimensions in close rib (MM)**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 83 | 121 | 159 | 197 | 235 | 273 | 311 | 349 | 387 | 425 |
| 463 | 501 | 539 | 577 | 615 | 653 | 691 | 729 | 767 | 805 |
| 843 | 881 | 919 | 957 | 995 | 1033 | 1071 | 1109 | 1147 | 1185 |
| 1223 | | | | | | | | | |


Customizw Dimensions Available On Request

# INSTALLATION PROCEDURE FOR FRP MANHOLE COVERS

Care Should be taken in handling of manhole covers and frames to prevent damage of edges and corners.

**Installation Instruction**

1. Make sure that top level of the frame should match the road.
2. Prepare concrete bed considering height of the frame.
3. Frame should be allowed to set in concrete for a minimum time of 48 hrs. before its use.
4. Please note frame is not load bearing and therefore has to be completely supported from all sides.

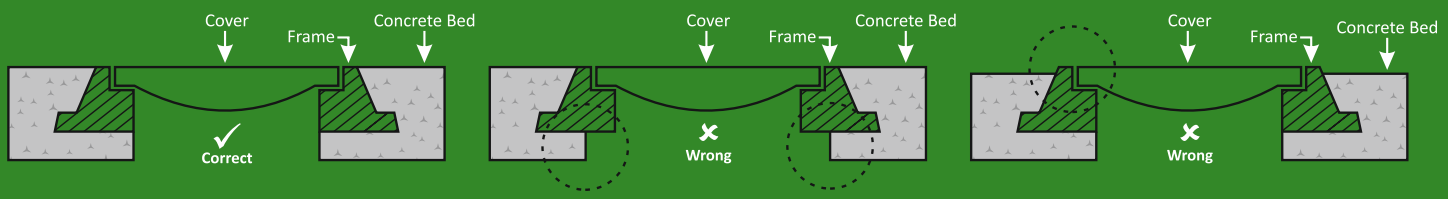


# PRODUCT APPLICATION

**ELD 2.5T/A15**

Suitable for use within residential and institutional complexes with pedestrian but occasional light motor vehicular traffic. These covers are also used for inspection chambers.

**LD 5.0T**

Suitable for use in areas with continuous motor vehicular traffic, e.g. underground parking or parking decks in residential areas, shopping malls, commercial complexes, high-rise buildings, multi-floored parking, etc.

**MD10T/B125**

Suitable for use in service lanes and roads, on pavements, and for use under medium duty vehicular traffic, including car parking areas.

**HD20T/C250**

Suitable for use in institutional areas, commercial areas, carriage ways, city trunk roads, bus terminals, etc. with heavy duty vehicular traffic of wheel loads between 5-10 tonnes, like buses and trucks, and parking areas where manhole chambers are located in the middle of roads.

**HD40/D400**

Carriage ways of roads and parking areas for all types of road vehicles.

**These covers can also be used for:**

1. Inspection chambers for sewerage.
2. Underground electrical and telecom cable chambers.
3. Water, gas and petroleum installations.
4. Beautification of gardens and landscapes.

FLORTEK®

Manufactured & Marketed By:

**FLORTEK INDUSTRIES PVT. LTD.**

Rajkot (Guj.) INDIA.
flortekindustries@gmail.com
www.flortekfrpcover.com

Authorised Dealer