

# The Feedback Control of a Robotic Gymnast

by

Henry Kotzé



*Thesis presented in partial fulfilment of the requirements for  
the degree of Master of Engineering (Mechanical) in the  
Faculty of Engineering at Stellenbosch University*

Supervisor: Dr. J.A.A Engelbrecht

October 2018

# Declaration

By submitting this thesis electronically, I declare that the entirety of the work contained therein is my own, original work, that I am the sole author thereof (save to the extent explicitly otherwise stated), that reproduction and publication thereof by Stellenbosch University will not infringe any third party rights and that I have not previously in its entirety or in part submitted it for obtaining any qualification.

Date: ..... 2018/10/27 .....

Copyright © 2018 Stellenbosch University  
All rights reserved.

# Abstract

## The Feedback Control of a Robotic Gymnast

H. Kotzé

*Department of Mechanical and Mechatronic Engineering,  
University of Stellenbosch,  
Private Bag X1, Matieland 7602, South Africa.*

Thesis: BEng (Mechatronics)

October 2018

meep

# Uittreksel

## Die Terugvoer Beheer van 'n Robotiese Gimnas

*(“The Feedback Control of a Robotic Gymnast”)*

H. Kotzé

*Departement Meganiese en Megatroniese Ingenieurswese,  
Universiteit van Stellenbosch,  
Privaatsak X1, Matieland 7602, Suid Afrika.*

Tesis: BIng (Megatronika)

Oktober 2018

meep

# Acknowledgements

I would like to express my sincere gratitude to the following people and organisations.

# Dedications

*Hierdie tesis word opgedra aan ...*

# Contents

<b>Declaration</b>	<b>i</b>
<b>Abstract</b>	<b>ii</b>
<b>Uittreksel</b>	<b>iii</b>
<b>Acknowledgements</b>	<b>iv</b>
<b>Dedications</b>	<b>v</b>
<b>Contents</b>	<b>vi</b>
<b>List of Figures</b>	<b>viii</b>
<b>List of Tables</b>	<b>ix</b>
<b>Nomenclature</b>	<b>x</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Problem Statement . . . . .	1
1.2 Literature Study . . . . .	1
1.3 System Overview . . . . .	3
1.4 Project Execution . . . . .	4
1.5 Report Outline . . . . .	5
<b>2 Conceptualisation and Modelling</b>	<b>6</b>
2.1 System Concepts . . . . .	6
2.2 Mathematical Model . . . . .	7
2.3 Simulation Model . . . . .	8
2.4 System Identification . . . . .	9
2.5 Model Validation . . . . .	12
<b>3 Feedback Control Design</b>	<b>14</b>
3.1 Balancing Controller . . . . .	14
3.2 Swingup Controller . . . . .	16
3.3 Simulation Results . . . . .	19

<b>4</b>	<b>Hardware Design and Implementation</b>	<b>20</b>
4.1	Mechanical Hardware . . . . .	20
4.2	Electronic Hardware . . . . .	23
<b>5</b>	<b>Software Design</b>	<b>34</b>
5.1	Software Requirements . . . . .	34
<b>6</b>	<b>Practical Results</b>	<b>37</b>
6.1	Swingup Controller . . . . .	37
6.2	Balancing Controller . . . . .	37
6.3	Swingup and Balancing . . . . .	37
<b>7</b>	<b>Conclusion</b>	<b>38</b>
7.1	Summary . . . . .	38
7.2	Recommendation . . . . .	38
	<b>Appendices</b>	<b>39</b>
<b>A</b>		<b>40</b>
A.1	Derivation of the Mathematical Model . . . . .	40
A.2	Collocated Linearisation . . . . .	42
A.3	Taylor Series Expansion Around Unstable Equilibrium Position	42
A.4	Communication Structure . . . . .	42
A.5	Electronic Design Schematic . . . . .	43
	<b>List of References</b>	<b>47</b>



# List of Figures

1.1	State Space Representation with Feedback Gain . . . . .	2
1.2	System Overview of the Feedback Control of Robotic Gymnast . . .	3
2.1	Free Body Diagram of the Double Pendulum . . . . .	7
2.2	MATLAB Simulink Model . . . . .	9
2.3	Initial Condition System Response while $\phi = 0$ rad . . . . .	11
2.4	Initial Condition System Response while $\theta = 0$ rad . . . . .	12
2.5	Frequency Content of Time-Domain Initial Condition Responses . .	13
3.1	State Space Representation of the Balancing Controller . . . . .	14
3.2	Block Diagram of the Non-Linear Controller . . . . .	17
3.3	The Swing-Up & Balancing of the Robotic Gymnast . . . . .	19
4.1	Simplified Drawing of Physical Model . . . . .	22
4.2	Electronic System Overview . . . . .	24
4.3	Simplified Model of a Potentiometer . . . . .	27
4.4	Unity Gain Amplifier Circuit . . . . .	27
4.5	Digital Logic Circuit containing JK-Flipflops, XOR- and NOR Gates	28
4.6	Waveform of the JK-Flipflop,XOR, and NOR Gate Circuit . . . . .	28
4.7	Simplified Circuit of Motor Feedback . . . . .	29
4.8	Logic Level Converter & Inverter Circuit . . . . .	30
4.9	AND digital logic with inverter . . . . .	31
4.10	AND Digital Logic Circuit Waveforms . . . . .	31
4.11	Relationship between Duty-Cycle of PWM Signal and Current through Motor . . . . .	32
5.1	Data Structure for Streaming Data during Experiments . . . . .	34
5.2	Data Structure for Sending Commands . . . . .	35
A.1	Data Structure for Sending Commands . . . . .	42

# List of Tables

2.1	System Parameters . . . . .	10
2.2	System Characteristic & their Statistical Properties from 10 Experiments . . . . .	11
2.3	Comparison between Experimental- and Simulated System Characteristic . . . . .	12
4.1	Physical Model Paramaters . . . . .	22
4.2	Center of Mass for Each Pendulum from their Rotating Hinge . . .	23
4.3	Suppy Voltage's for the different components . . . . .	26
4.4	Values of Constants used in Equation (4.2) . . . . .	32
A.1	Summary of Communication Commands and their Effects . . . . .	46

# Nomenclature

## Constants

$$g = 9.81 \text{ m/s}^2$$

## Variables

$Re_D$	Reynolds number (diameter) . . . . .	[ ]
$x$	Coordinate . . . . .	[ m ]
$\ddot{x}$	Acceleration . . . . .	[ m/s <sup>2</sup> ]
$\theta$	Rotation angle . . . . .	[ rad ]
$\tau$	Moment . . . . .	[ N·m ]

## Vectors and Tensors

$$\vec{v} \quad \text{Physical vector, see equation ...}$$

## Subscripts

$a$	Adiabatic
$a$	Coordinate

# Chapter 1

## Introduction

### 1.1 Problem Statement


A feedback control system for a swinging robotic gymnast must be designed, implemented and verified. Feedback control loops must be designed that use the "legs" of the gymnast to swing the "body" of the gymnast from a "hanging" position to a "handstand" position and then balance the gymnast on top of the horizontal bar. A mathematical model for the dynamics of the swinging robotic gymnast system must be derived or sourced from literature. The dynamics must be analysed to propose an appropriate feedback control architecture that actuates the "legs" of the gymnast using feedback from sensors that measure the swinging motion of the gymnast on a horizontal bar. A practical demonstrator must be constructed and the correct operation must be demonstrated.

The feedback control of a robotic gymnast entails to model the behavior of a gymnast hanging from a horizontal bar and tries to swing himself upwards using his legs until he balance himself in the inverted position. The problem is modelled as a double pendulum: where one end is connected to a fixed hinge, the 2 pendulums are connected with a hinge between each other and there is some torque actuating the lower pendulum.

### 1.2 Literature Study

The fundamental concepts that provides the foundation for the concepts discussed in the report will be summarise here. It acts as a refresher for those familiar to control theory.

The ordinary differential equations (ODE's) describing a system can be arranged as a set of linear differential equations. Describing a system in such a way is known as the State Space design approach, where the solution is the trajectory of the chosen state variables. Gene F. Franklin (2015)

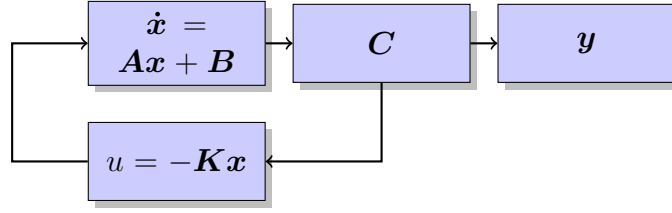

**Figure 1.1:** State Space Representation with Feedback Gain

These ODE's are required to be written as vectors in the state-variable form seen in equation (1.1) and (1.2)

$$\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}u \quad (1.1)$$

$$\mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}u \quad (1.2)$$

The  $n$ th-column vector  $\mathbf{x}$  is called the state of the system for a  $n$ th-order system. The  $\mathbf{A}$  matrix is the system matrix, containing  $n \times n$  elements and the input matrix is the  $n \times 1$   $\mathbf{B}$  matrix.  $\mathbf{C}$  is a  $1 \times n$  row matrix called the output matrix and the scalar  $\mathbf{D}$  is known as the direct transmission term Gene F. Franklin (2015).

A system parameter of great interest to control engineers are the poles of the system. It provides the characteristic response of the system starting at a initial condition with no forcing function. These poles,  $s$ , are the natural frequencies of the system and the state space representation allow these poles to be easily identified. The poles are the solution to the eigenvalue problem of the  $\mathbf{A}$  matrix shown in equation (1.3) Gene F. Franklin (2015).

$$\det(s\mathbf{I} - \mathbf{A}) = 0 \quad (1.3)$$

The poles of the system can be assigned new positions to satisfy dynamic response specification by introducing feedback. The feedback is a linear combination of the state variables  $\mathbf{x}$  resulting in the input of the system  $u$  to be transformed as seen in equation (1.4) and represented in Figure 1.1. Substituting equation (1.4) into (1.1) the characteristic equation is now described as (1.5). The corresponding characteristic equation is:

$$\alpha_s = (s - s_1)(s - s_2) \dots (s - s_n)$$

This shows by selecting the correct gain matrix  $\mathbf{K}$  the poles of the system can be moved to a desired position.

$$u = -\mathbf{K}\mathbf{x} \quad (1.4)$$

$$\det[s\mathbf{I} - (\mathbf{A} - \mathbf{B}\mathbf{K})] = 0 \quad (1.5)$$

The classical approach to controlling a system is by implementing a controller which reacts on the error of the desired state and the current state. These controllers are more commonly known as PID-controllers where the controller equation is shown in (1.6).


$$u(t) = K[e(t) + K_I \int_0^t e(\tau) d\tau + K_D \frac{de(t)}{dt}] \quad (1.6)$$

Each term represent an effect it has on the system response when the PID-controller is implemented shown in Figure ???. If the system or plant is assumed to be a second-order differential equation represented by:

$$\ddot{q} + (2\zeta\omega_n + K_D)\dot{q} + (\omega_n^2 + K_P)q + K_I = 0 \quad (1.7)$$

From equation (7) it is visible that by tuning the PID constants the response of the system can controlled.

### 1.3 System Overview

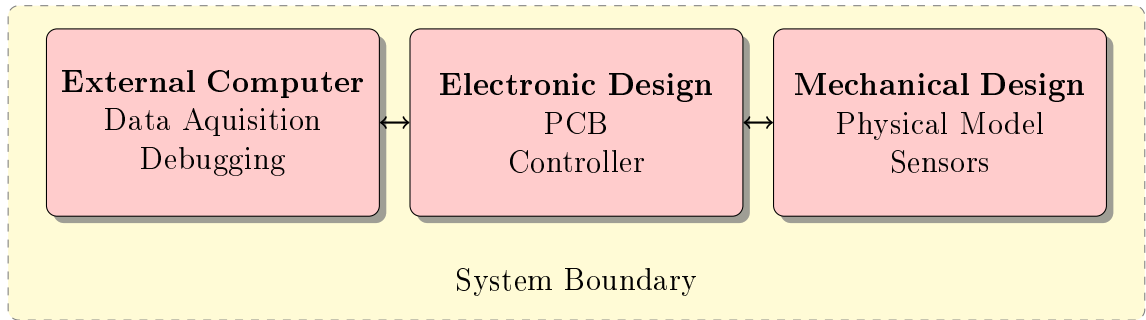

**Figure 1.2:** System Overview of the Feedback Control of Robotic Gymnast

Figure 1.2 provides an overview of the various subsystems the project will contain. The project is subdivided into these subsystems being developed separately with little interaction between the each other. An brief overview on each subsystem will be presented here.

The external computer communicates with the electronic design sending instruction to start the system and for debugging purposes. The external computer will receive data from the electronic design and allows the verification of system parameters.

The electronic design acts as the middle-man between the mechanical design and the external computer. It provides instructions to the mechanical design components based on the controller while sending data to the external computer. The electronic design contains the Printed Circuit Board (PCB)

that conditions all the signals for processing.

The mechanical design is responsible for creating a physical model that represents the mathematical model describing the system. The correct sensors must be selected to measure the state variables and providing interfaces for the electronic design.

## 1.4 Project Execution

The execution of the project occurs in a sequence of steps. First the mathematical model of the system is derived by using the appropriate approaches. The derived mathematical model is then implemented on a simulation program where the dynamics of the system can be verified and inspected.

Following the successful implementation of the mathematical model the various controllers will be designed and implemented on the simulation program. The behaviour of the simulated system will be inspected.

From the simulation results the mechanical design specification will be determined. The mechanical design will then commence to create a physical model that provides an acceptable representation of the mathematical model.

During manufacturing of the mechanical design the electronic design will start. Conceptual designs will be done to determine the various designs capable of meeting the requirements. The electronic design will be tested to ensure it performs as designed with the opportunity to create revisions of the design.

The programming of the microcontroller, from now on as  $\mu C$ , will start. This includes the programming of the controller, data acquisition and the conversions of the sampled data.

System identification will then occur to determine the various parameters required by the controllers. These newly determined parameters will then be implemented on the simulation program. New controllers will be designed and verified in simulation.

The new controllers are then implemented onto the  $\mu C$  for the system experiments to start. From these system experiments the responses of the experiment will be compared by those of the simulation.

The report was written throughout the sequence of steps mentioned above and will be completed and reviewed at the end.

## 1.5 Report Outline

A brief overview of each chapter in the report will be provided here. It acts as a primer for the reader and the easy identification of sections that may interest the reader more.

Chapter 2 explains the system concepts that are referenced throughout the report. It contains the mathematical derivation of the robotic gymnast and the simulated model. The system parameters with system identification test results are shown and whether the simulated models are an acceptable representation of the physical model.

Chapter 3 describes the design paradigm for swinging and balancing of the robotic gymnast. The specifications for the controllers and the simulated responses of the controller are provided.

Chapter 4 contains the designs of the mechanical and electronic systems of the project. The various components used in the designs and it explains how the physical model state information is provided to the designed controllers.

Chapter 5 describes the software implemented to reduplicate what has been done in the project. It explains the architecture of the software and the various functions implemented.

Chapter 6 provides the practical results of the controllers implemented in chapter 3 and hypothesises unexpected behaviour in the experiments.

Chapter 7 concludes the report with a summary of the report and recommendations for future endeavours on the Feedback Control of a Robotic Gymnast.



# Chapter 2

## Conceptualisation and Modelling

### 2.1 System Concepts

The report contains many variable names and use of terminology for concepts that is used throughout the report. These variables and terminologies are defined here.

The double pendulum is a under-actuated system which is defined as a system where the input to the system cannot command any of the state variables an instantaneous acceleration. This is due to the torque input only actuating the lower pendulum and the energy in the lower pendulum must be transferred to the upper pendulum to initiate an acceleration.


The robotic gymnast is describe as a double pendulum consisting out of an actuated- and non-actuated pendulum as seen in Figure 2.1. The position of the non-actuated pendulum is described by the angle  $\theta$  whereas the actuated pendulum is described by  $\phi$  relative to  $\theta$ . The angle's  $\theta$  and  $\phi$  are the independent parameters that describe the entire system.

There are 2 position of interest where the system contain special characteristics. These 2 positions are the stable- and unstable equilibrium position. In the stable position the system is at rest hanging downward when  $\theta = 0$  rad and  $\phi = 0$  rad. It is stable due to the having negative real poles resulting in the system returning to this position when disturbed. The unstable equilibrium position is where  $\theta = 2\pi$  rad and  $\phi = 0$  rad resulting in the robotic gymnast balancing upside down. In this position the system contain positive real poles and any disturbance will cause the system to exponentially grow away from this position.

region of controllability:he null controllability region is the set of states that can be steered to inverted unstable equilibrium position in a fixed time

with a constrained control input nul (2002).  
LTI system

## 2.2 Mathematical Model

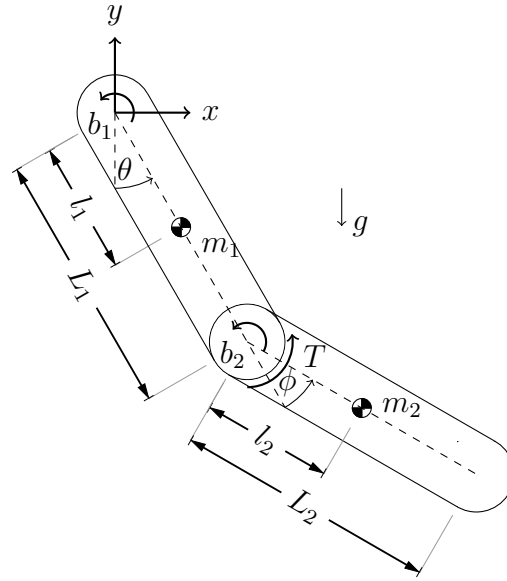

**Figure 2.1:** Free Body Diagram of the Double Pendulum

The approach taken to derive the mathematical model of the robotic gymnast will be discussed in this section. It is presented to allow the reader to understand parameters mentioned in the report. The swing-up of the robotic gymnast consist of non-linear behaviour and is require to fully derive the dynamics of the system. The strenuous mathematical steps are removed from the reader, which is provided in Appendix A.1, and a summary of the motivation and paradigm approach to the derivation is provided here.

The robotic gymnast is modelled as two pendulums connected together with a hinge, where each pendulum is modeled as having their mass distributed arbitrary along their axis. There is a torque actuating the lower pendulum seen in Figure 2.1 and friction is modelled as proportional to the angular velocity of the pendulums. The friction that develops at the hinge is proportional to the relative motion of the actuated pendulum and non-actuated pendulum. The angle,  $\phi$  was purposefully chosen relative to  $\theta$  to ease the identification of this friction. Figure 2.1 displays the free body diagram of the robotic gymnast.

Deriving the equation of motion of the robotic gymnast can be approached using different methods. The method chosen in the report is by using the

Euler-Lagrange equation. The Euler-Lagrange equation shown in (2.1) derives the dynamics of the system by analysing the energy of the system. This approach was chosen due to the energy of the system being easily defined as the potential energy  $T$  of the 2 pendulums, and the kinetic energy  $V$  of the pendulums.

$$\frac{d}{dt} \frac{\partial \mathcal{L}}{\partial \dot{\vec{q}}} - \frac{\partial \mathcal{L}}{\partial \vec{q}} = 0 \quad (2.1)$$

$$\mathcal{L} = T - V \quad (2.2)$$

Using the Euler-Lagrange equation leads to the condense equations shown in (A.1) and (A.3),

$$d_{11}\ddot{\theta} + d_{12}\ddot{\phi} + h_1 + \psi_1 = 0 \quad (2.3)$$

$$d_{21}\ddot{\theta} + d_{22}\ddot{\phi} + h_2 + \psi_2 = \tau \quad (2.4)$$

where the coefficients are defined as

$$d_{11} = I_a + I_b + m_2(L_1^2 + l_2^2 + 2L_1l_2 \cos(\phi)) \quad (2.5)$$

$$d_{12} = I_b + m_2(l_2^2 L_1 l_2 \cos(\phi)) \quad (2.6)$$

$$h_1 = -m_2 L_1 l_2 \sin(\phi) \dot{\phi}^2 - 2m_2 L_1 l_2 \sin(\phi) \dot{\phi} \dot{\theta} \quad (2.7)$$

$$\psi_1 = (m_2 l_1 + m_2 L_1) g \cos(\theta) + m_2 l_2 g \cos(\theta + \phi) \quad (2.8)$$

$$d_{21} = I_b + m_2(l_2^2 + L_1 l_2 \cos(\phi)) \quad (2.9)$$

$$d_{22} = I_b + m_2 l_2^2 \quad (2.10)$$

$$h_2 = m_2 L_1 l_2 \sin(\phi) \dot{\theta}^2 \quad (2.11)$$

$$\psi_2 = m_2 l_2 g \cos(\theta + \phi) \quad (2.12)$$

## 2.3 Simulation Model

The mathematical model derived in the previous section is required to be implemented on a simulation program. Simulating the model allows the designer to understand how system parameters influence the dynamics of the system and the verification of controllers implemented. It will be presented by discussing how the simulation is a true representation of the system, how design specifications were determined and the influence of these parameters.

Simulation of the robotic gymnast was done using MATLAB Simulink. The differential equations shown in equation (A.1) and (A.3) were implemented using the MATLAB function box. It was required to write these equation where  $\ddot{\phi}$  and  $\ddot{\theta}$  is the subject in each of the *MATLAB Function* box to allow MATLAB to simulate the model.

Other non-linearities introduced by sensors and components were added such as saturation of the motor, gearbox backlash and quantisation of sensory data. These non-linearities were implemented to allow the simulation to be an acceptable representation of the physical system. The Simulink Model is shown in Figure 2.2.

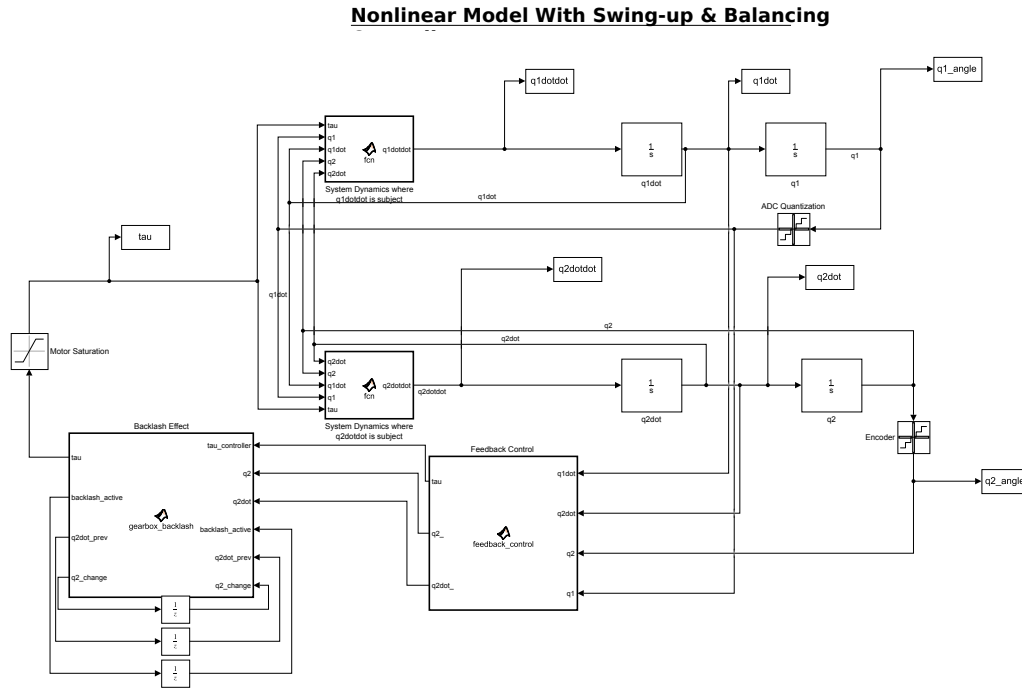


Figure 2.2: MATLAB Simulink Model

## 2.4 System Identification

The system identification tests are done to determine the characteristics that describe the behavior of the system. These characteristics include the damping ratio's and natural frequencies of the system around the unstable equilibrium position. The system are described by 2 independent parameters,  $\theta$  and  $\phi$  which defines the position of the non-actuated and actuated pendulums.

The project started off with a previous physical model which provided realistic system parameters to allow the simulation to be a acceptable representation of reality. From using these previous system parameters the simulation provided a set of specification for the new design. The newly design model parameters are used throughout the report and the system identification is provided here to proof the simulation is a acceptable representation of the physical model. The physical model parameters is shown in Table 2.1.

System Parameter	Value
$L_1$	0.235 m
$L_2$	0.245 m
$I_A$	0.0265 kg · m <sup>2</sup>
$I_B$	0.0221 kg · m <sup>2</sup>
$m_1$	0.5763 kg
$m_2$	0.4928 kg
$l_1$	0.235 m
$l_2$	0.245 m

**Table 2.1:** System Parameters

Since the system is described by 2 independent parameters the system is thus a 2 degree of freedom (2DOF) system and is expected to contain 2 natural frequencies each accompanied by a damping coefficient.

The first natural frequency of the system is determine by inspecting the response of the system when starting at a initial condition and keeping  $\phi = 0$  rad constant throughout the response. This was done by using a lightweight PVC pipe that has negligible effect on the weight of the system. The actuated pendulum and non-actuated pendulum are constrained to this pipe to ensure the 2 pendulums stay in-line with each other and thus ensuring  $\phi = 0$  rad. The response of the system is shown in Figure 2.3 starting at a initial condition of roughly  $\theta = \frac{\pi}{2}$ . The accuracy of the initial conditions is of little importance, but the initial condition must allow the response to contain a few oscillation to accurately determine the parameters of interest.


The second natural frequency is determined by analysing the response of the system when  $\phi$  starting at a initial condition and keeping  $\theta = 0$  rad throughout the response. This was accomplished by constraining the non-actuated pendulum using hard stops. Figure 2.4 shows the measured response of the system when  $\phi$  starts at a initial condition and keeping  $\theta$  constant.

The natural frequencies of the system is identified by inspecting the frequency content of the time-domain responses. The frequency content of the initial condition responses of both experiments are shown in Figure 2.5, by applying the Fast Fourier Transform (FFT) algorithm to the time-domain signals. The FFT indicates the natural frequencies by the predominant peaks across the frequency spectrum which are tabulated in Table 2.2.

The responses shown in Figure 2.3 and 2.4 are decaying with time and this decaying behaviour can be modeled by the following equation:

$$\tau(t) = -\zeta\omega_n t$$

Where  $\omega_n$  is the natural frequency of the system and  $\zeta$  the damping ratio of the system. The natural frequencies of the system has already been determined

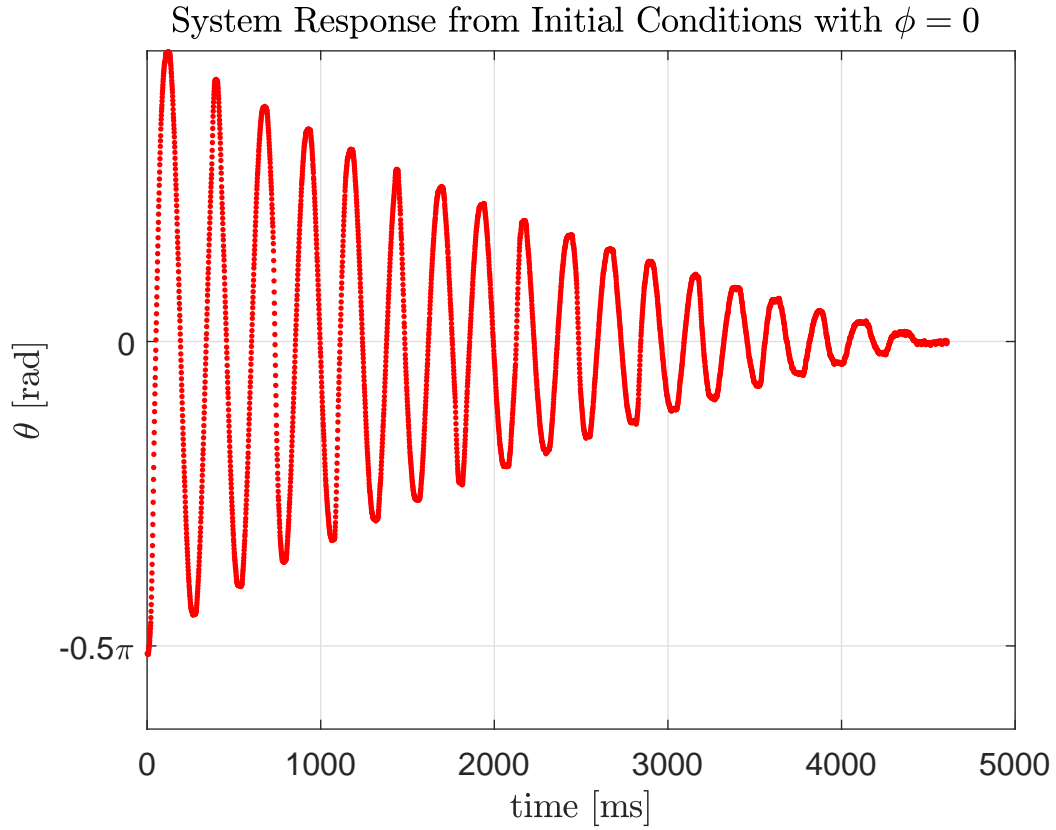


**Figure 2.3:** Initial Condition System Response while  $\phi = 0$  rad

System Characteristic	Mean	Standard Deviation
$f_1$	3.93 Hz	
$f_2$	3.62 Hz	0.04029
$\zeta_1$	$1.6931 \cdot 10^{-5}$	$4.823 \cdot 10^{-6}$
$\zeta_2$	$5.85184 \cdot 10^{-5}$	

**Table 2.2:** System Characteristic & their Statistical Properties from 10 Experiments

and thus linear regression can be used to determine the best  $\zeta$  that will fit the measured data. The decaying functions are shown in Figure 2.3 and 2.4 with the best fit  $\zeta$  values shown in Table 2.2. It is visible from the responses that the damping ratio changes when the response are nears steady state. This change of damping ratio is negligible due to the controllers being implement are robust to changes in  $\zeta$ .

Figure 2.3 shows the decaying function with properties that are shown in Table ?? and it is visible that the calculated values provides a acceptable approximation of the measured data.

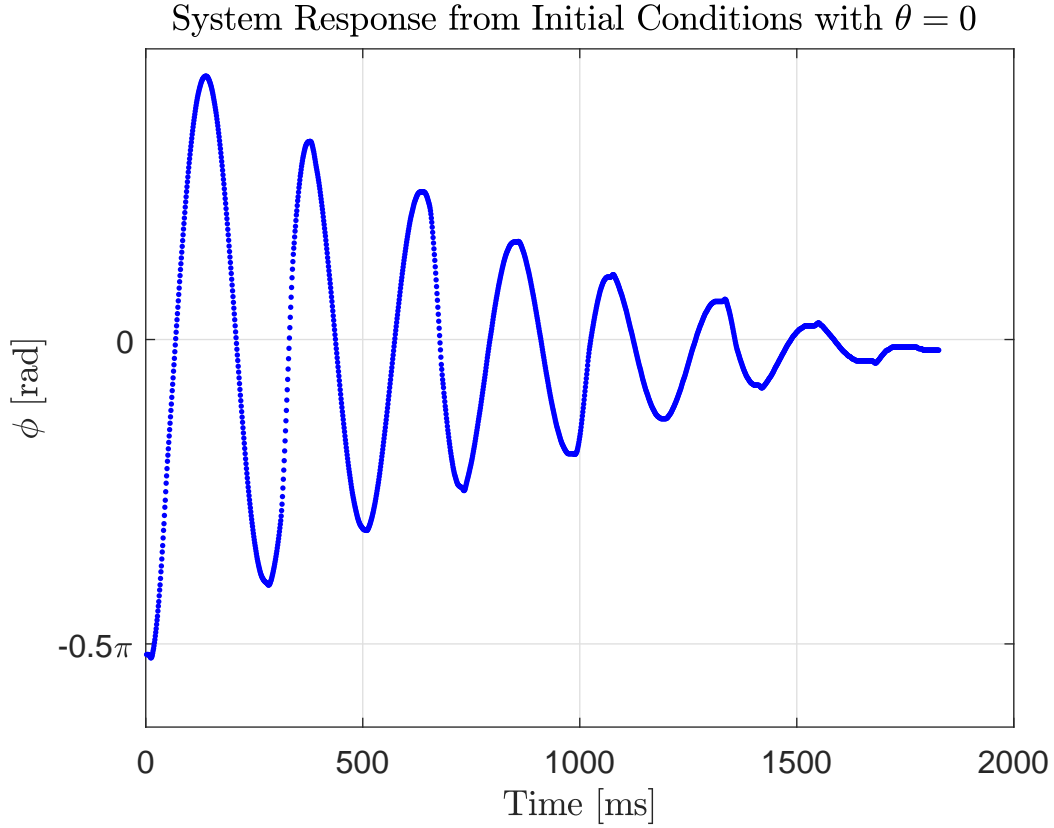


**Figure 2.4:** Initial Condition System Response while  $\theta = 0$  rad

System Characteristic	Experiment	Simulated	Difference
$w_{n1}$	3.93 Hz		
$w_{n2}$	3.62 Hz	0.04029	

**Table 2.3:** Comparison between Experimental- and Simulated System Characteristic

## 2.5 Model Validation

The model implemented in simulation must be able to describe the physical model to an acceptable degree to allow any further developments on the simulated model. The simulated model will be validated by comparing the experimental system characteristic values to those attained in simulation.

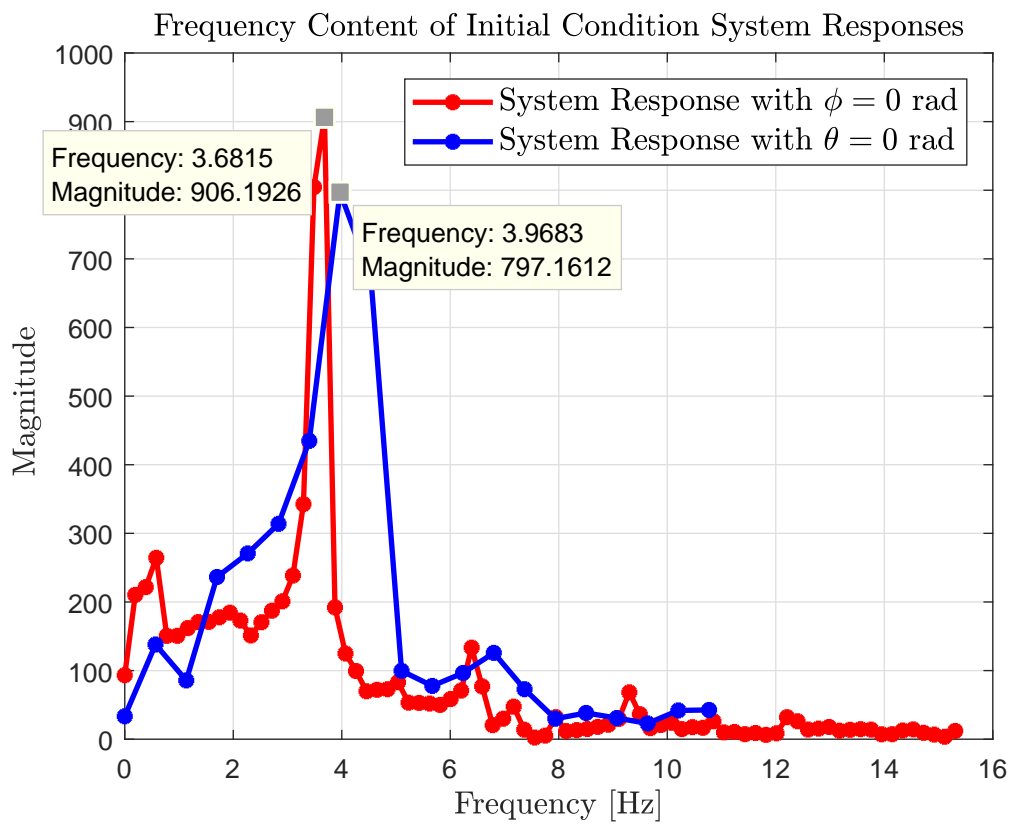

**Figure 2.5:** Frequency Content of Time-Domain Initial Condition Responses



# Chapter 3

## Feedback Control Design


### 3.1 Balancing Controller

Provided the robotic gymnast is in the vicinity of the unstable equilibrium position, a balancing controller is required to balance the system. The design approach is based on the premise that the swing-up controller will swing the robotic gymnast to the vicinity of the unstable equilibrium position where the balancing controller will take over. This section will focus on aspects required to implement this balancing controller.

#### 3.1.1 Controller Architecture

Figure 3.1 shows the block diagram that implements the balancing controller, and it is clear that the State Space representation for the system is used. The requirement of using the State Space representation is that the system must be a linear time invariant (LTI) system. The system describe in equation (A.1) and (A.3) are not linear and thus linearisation is required. How this requirement was satisfied is discussed in the following sections.

Another aspect of the balancing controller is that there are no reference input to instruct the controller to guide the robotic gymnast to the unstable equilibrium position. Due to the system being linearised at the unstable equilibrium position.

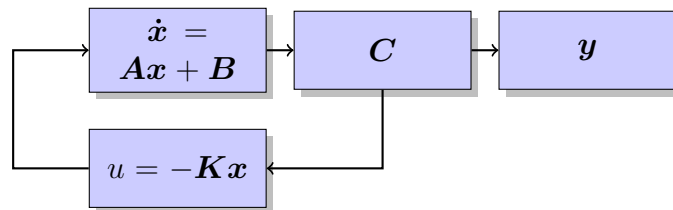

**Figure 3.1:** State Space Representation of the Balancing Controller

librium position and that the swing-up controller brings the system to this linearised region the problem is effectively a initial condition problem. The unstable poles of the system can be move to become stable using feedback and results in the system to decay to the unstable equilibrium position from an initial condition around the unstable equilibrium position.

### 3.1.2 Requirements/Specifications and Constraints

### 3.1.3 Plant Linearisation

As mentioned previously, to implement the State Space representation the system must be a LTI system. This is achieved by using the Taylor Series Expansion to linearise the system at the unstable equilibrium position.

The independent parameters,  $\phi$  and  $\theta$ , will be condensed from now on as a vector describes as

$$\vec{q} = \begin{bmatrix} \theta \\ \phi \end{bmatrix}$$

The system is thus linearised at

$$[\vec{q}_s, \dot{\vec{q}}_s, \ddot{\vec{q}}_s]^T = [\pi, 0, 0, 0, 0, 0]$$

with the mathematical details shown in Appendix A.3. This linearised model can than be written in the state space form to implement a feedback gain. The state space variables are chosen as  $\Delta\vec{q}$  and  $\Delta\dot{\vec{q}}$  which results in the state space representation as:

$$\dot{\vec{q}} = \mathbf{A}\Delta\vec{q} + \mathbf{B}u$$

and

$$\vec{y} = \mathbf{D}\Delta\vec{q} + \mathbf{0}u$$

The poles of the system are identified by determining the eigenvalues of the  $\mathbf{A}$  matrix. The linearised system remains a coupled system which results that the quadratic eigenvalue problem shown in equation (3.1) was required to be solved to identify the poles of the system. The solved quadratic eigenvalue problem results in the following poles using the system parameters in Table 2.1.

$$Q(\lambda) = \lambda^2 M + \lambda C + K \quad (3.1)$$

$$\vec{s} = \begin{bmatrix} -8.2 \\ -4.2 \\ 8.2 \\ 4.2 \end{bmatrix}$$

The eigenvalues of the system are all real indicating the response of the system when disturbed is an exponential function. This can be explained by realising the linearised system is modelled as a single pendulum. Once the single pendulum is disturbed from the unstable equilibrium position it would continue to rotate downwards in the same direction and not with an oscillatory response.

### 3.1.4 Full State Feedback Design

The poles of the system are pairs of positive and negative real poles that indicate an unstable system. This is expected due to the system being linearised at the unstable equilibrium position. When the linearised system is at rest, any disturbance will result in a theoretically infinite growth of the state variables, but this behaviour can be controlled by introducing feedback.

These poles will be moved to the desired position by using the method of dominant poles. The method of dominant poles chooses a pair of the poles for the closed-loop system and select the other open-loop poles to have real parts. This allows the higher-order system response to be characterised as a second-order response Gene F. Franklin (2015). The linearised model already has 2 negative real poles which is chosen to stay the same. The real positive poles were selected based on the following specifications.

These specification was selected on increasing the null controllability region with a low settling time. Due the approximation of the linearised model the null controllability region may be larger than the derived sized sim (2006).


### 3.1.5 Simulation Response

## 3.2 Swingup Controller

The swing up of the robotic gymnast is done by the non-linear feedback control system. For the robotic gymnast to swing from the stable equilibrium position to the unstable equilibrium position the feedback control must incorporate the non-linearities of the system. How these non-linearities of the system are incorporated and the design paradigm of the approach will be explained in following section.

### 3.2.1 Controller Architecture

Figure 3.2 shows a high-level block diagram of the multiple parts of the swing-up controller. These parts are required to work in unison to allow the robotic gymnast to swing.

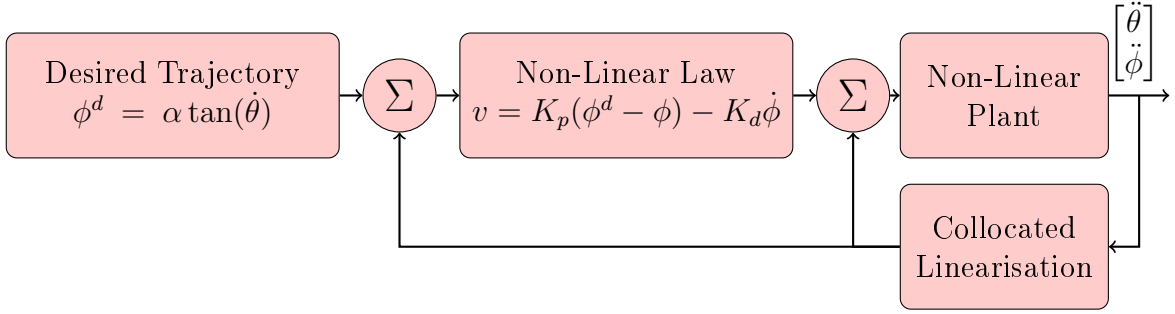

**Figure 3.2:** Block Diagram of the Non-Linear Controller

The collocated linearisation block is the foundation on which the entire controller is built. It creates a linear response from one of the outputs of the plant. The linear response of one the outputs can then be used to follow a desired trajectory. The swing-up controller then contains a classical control theory approach where gains are selected to characterise the response of the system based on the error of the desired and actual trajectory.

Each of the blocks shown in the block diagram will be discussed in the section below.

### 3.2.2 Requirements/Specifications and Constraints

The requirements of the swing-up controller is to swing the robotic gymnast up under 30 seconds to the unstable equilibrium positions. In the vicinity of the unstable equilibrium position the when the non-actuated pendulum is upright  $\theta = 2\pi \text{ rad} \pm \frac{\pi}{30}$  the controller must position the actuated pendulum between  $\phi \in [-5^\circ, 5^\circ]$ .

The first requirement is set to provide a feasible solution to the swing-up of the robotic gymnast and allow the swing-up sequence to be captivating. The second requirement is set to ensure the linear approximation holds when the balancing controller is active to bring the system to the unstable equilibrium position and balance.

Constraints that is placed on the controller is the stall torque of the motor.

### 3.2.3 Feedback Linearisation

It has been shown that it is not possible to linearise the dynamics of the gymnast by means of static state feedback and non-linear transformation mur (1990), but it is possible to achieve a linear response from one of the outputs of the plant by implementing a non-linear feedback. This non-linear feedback

is the partial feedback linearisation.

Collocated linearisation is a form of partial feedback linearisation where a non-linear control input  $\tau$  is used to linearise the response of the actuated pendulum  $\ddot{\phi}$ . By analysing equation (A.3), the input  $\tau$  is chosen to cancel all the non-linearities of the system and add an additional outer loop control input  $v_2$ . This outer loop control input can be selected to force the actuated pendulum to follow a desired trajectory (spo, 1995). The derivation of the collocated linearisation is shown in Appendix ??.

$$d_{11}\ddot{\theta} + h_1 + \psi_1 = -d_{12}v_2 \quad (3.2)$$

$$\ddot{\phi} = v_2 \quad (3.3)$$

The subtle practical implication of using collocated linearisation is that the system being controlled must be well defined. If this is not the case the non-linear input  $\tau$  will introduce other unwanted dynamics that could lead to undesirable behaviour.

### 3.2.4 Nonlinear Control Law

The ability to control the actuated pendulum to follow a desired trajectory, provides the possibility to increase the energy of the system if the correct trajectory is chosen. The increase of energy in the system will cause the pendulums to rise from their stable equilibrium position and thus start swinging upwards. The desired trajectory for  $\phi$  was chosen as equation (3.4) determined by W.Spong in (spo, 1995).

$$\phi^d = \alpha \arctan(\dot{\theta}) \quad (3.4)$$

The outer loop control input,  $v_2$ , is chosen as

$$v_2 = K_p(\phi^d - \phi) - K_d\dot{\phi} \quad (3.5)$$


The desired trajectory is chosen to increase the energy in the system and tries to allow the actuated pendulum to swing in phase with the non-actuated pendulum. By this approach the energy of the actuated pendulum is transferred to the non-actuated pendulum spo (1995). Appendix E shows how this approach is expected to work.

Returning to the desired trajectory of  $\phi$ , the coefficient  $\alpha$  constrains the actuated pendulum to stay within a interval of  $\phi \in [-\alpha, \alpha]$  spo (1995). This provides better control over the system to stay within the null controllability region when the system reaches the unstable inverted position.

Another side-effect of using the non-linear controller is that at rest the system will not start to swing-up. At rest, the condition are:  $\phi = 0\text{rad}$  and  $\dot{\phi} = 0\text{rad/s}$ , and results that the control output seen in equation (3.5) will be zero. This is effect was overcome by giving the system a small initial condition at rest to start the swing-up controller.

### 3.2.5 Simulation Response

## 3.3 Simulation Results

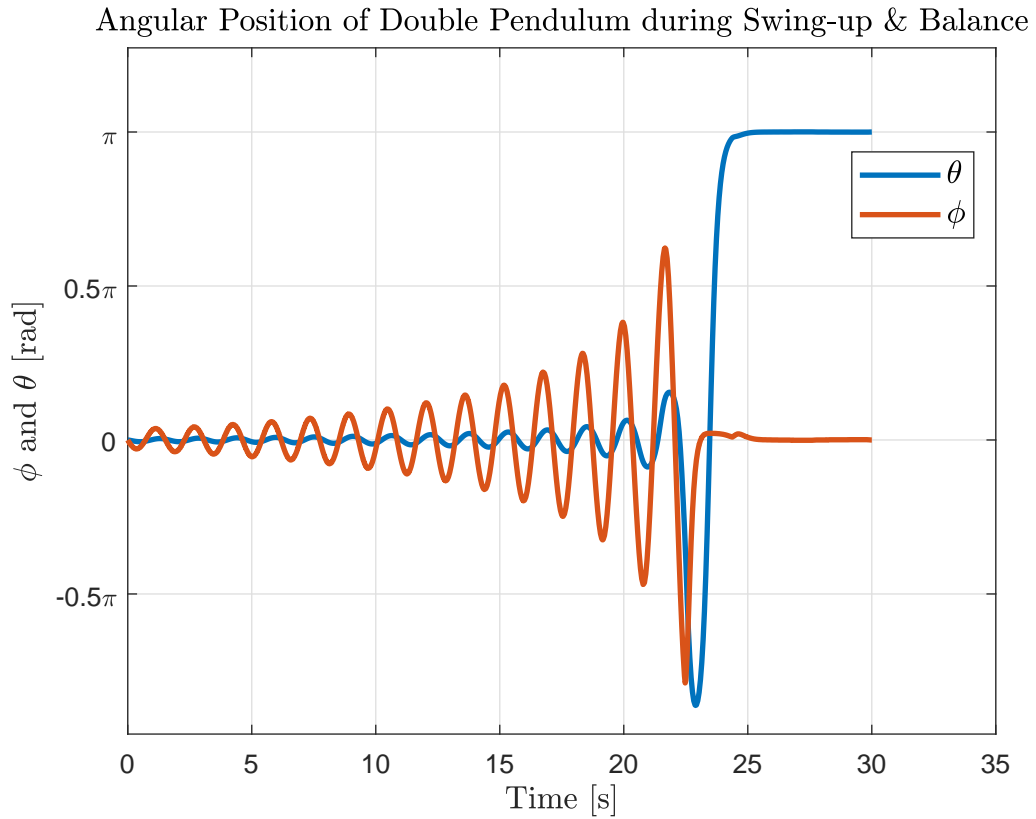

**Figure 3.3:** The Swing-Up & Balancing of the Robotic Gymnast

# Chapter 4

## Hardware Design and Implementation

### 4.1 Mechanical Hardware

The mechanical design that created the physical model is presented here. The physical model allowed the abstract mathematical model to be implemented and experiments to be conducted. It will be presented by discussing the various components required and design decision made to implement a physical model that represents the mathematical model.

Figure ?? shows the physical model designed and used for experiments. It emphasises some of the more critical components that were required.

It is important that the physical model holds the assumption made during the derivation of the robotic gymnast. These assumptions include planar dynamics of the robotic gymnast and rigid body dynamics. The assumption of planar dynamics comes in affect with the connection between the rotating shaft and the non-actuated pendulum. If the assumption holds there should be no vibration of the pendulum in any other direction than the rotating plane of the pendulums.

The assumption of rigid body dynamics is easily met due to the forces acting on the pendulums results in negligible strain.

#### 4.1.1 Mechanical Components

The components emphasised in Figure ?? is discussed in the following section and explains their significance of use.

The electrical slipring converts the rotating wires that lead to the motor mounted on non-actuated pendulum to stationary wires allowing for free ro-

tation and easy connection to the electrical design.

The bearing housing holds the ball-bearings in place ensuring for no unwanted vibration and misalignment. These ballbearings were press-fitted into the housing, ensuring a secure connection.

The potentiometer's shaft is connected to the shaft by means of a rubber tube. The rubber tube was chosen due to easy connection, allows for misalignment and the delay of measurement due to elasticity of the rubber is negligible.

The non-actuated pendulum is connected to shaft by means of using 3 screws. By keeping the shaft diameter as small as possible to reduce the inertia effect this method of connection was deemed the best.

### 4.1.2 Structural Analysis

Little calculation were done to determine whether sizes chosen for the diameters of the shaft were capable of withstanding the loads. Reason being based on experience that the chosen diameters are more than enough capable of withstanding the loads. The following section will provide the proof that the selected diameters are able to carry the loads.

The shaft was modelled as a simple supported beam with the diameter being the smallest used in the actual design. This model is conservative due to the design being a supported in by 3 points and varies in shaft diameter. Figure ?? shows the conservative model.

### 4.1.3 Inertia of Pendulums


Figure 4.1 shows a functional drawing of the physical model to visually aid the reader in understanding how the inertia of the system was determined. In equation (A.1) and (A.3) the  $I_a$  and  $I_b$  represents the inertia of the non-actuating and actuated pendulum about the axis coming out of the page passing through the center of mass respectively.

The physical model contains many parts that contribute to the inertia of the each pendulum due to representing a different physical form. How the inertia values shown in Table 2.1 were determined will be shown below.

The actuated pendulum consist out of an aluminium square rod connected to the shaft and the motor mounting. The inertia of a square rod through it's center of mass is:

$$I_{cyl} = \frac{1}{12}m_{cyl}[w^2 + L_1^2]$$



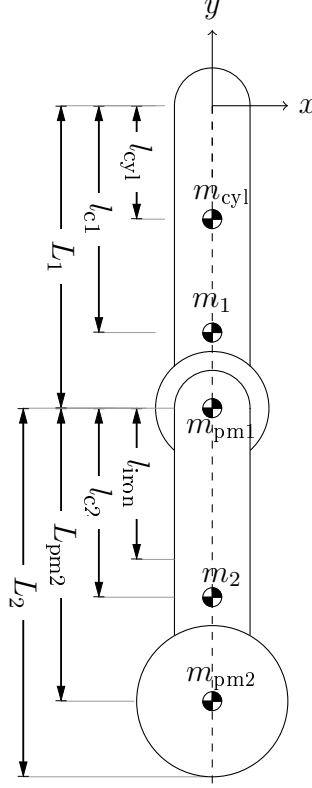

**Figure 4.1:** Simplified Drawing of Physical Model

The motor, gearbox and the motor mount was viewed as a point mass. It's inertia around the center of mass of the non-actuated pendulum is:

$$I_{pointmass_1} = m_{pointmass_1} \cdot [L_1 - l_{c1}]^2$$

The total inertia of the of the non-actuated pendulum is then:

$$I_a = I_{pointmass_1} + I_{cyl} + m_{cyl} \cdot [l_{c2} - l_{cyl}]^2$$

The actuated pendulum contains similar parts as the non-actuated pendulum. A pointmass at the bottom and an iron rod connected to the motor shaft and the pointmass. Determining the inertia is thus exactly the same as the non-actuated pendulum.

The physical system parameters used in the preceding text is shown in the Table 4.1

#### 4.1.4 Center of Mass

Each pendulum can be seen as a system containing discrete components, where each components center of mass is easily identified. Both iron rod and aluminium rod center of mass is in the middle of their rod length and the rest

Non-Actuated Pendulum	Value	Actuated Pendulum	Value
$m_{\text{cyl}}$	5	$m_{\text{iron}}$	
$w_{\text{cyl}}$	3.3	$w_{\text{iron}}$	
$m_{\text{pointmass1}}$	12	$m_{\text{pointmass2}}$	
$l_{\text{cyl}}$	12	$l_{\text{iron}}$	
$L_{\text{c1}}$	12	$L_{\text{c2}}$	
$L_1$	12	$L_2$	

**Table 4.1:** Physical Model Paramaters

Pendulum	Center of Mass [m]
Non-Actuated	0.235
Actuated	0.245

**Table 4.2:** Center of Mass for Each Pendulum from their Rotating Hinge

are seen as point masses. However each of these components center of mass position contribute to the center of mass position of each pendulum.

The center of mass for each pendulum is calculated using equation (4.1).

$$\vec{r} = \frac{\sum_i^j r_i m_i}{\sum_i^j m_i} \quad (4.1)$$

Using the equation (4.1) the center of mass for each pendulum from their hinge of rotation is shown in Table 4.2.

#### 4.1.5 Motor

The chosen motor used during experiments was the *Faulhaber DC 3257 012 CR* micromotor. It was used in combination with the *Faulhaber Planetary Gearhead 32/3* Series. The gearbox is a 2 stage reduction gearbox with a overall rounded reduction ratio of 14:1. The motor is capable of providing a stall torque of 539 mNm which is a converted output torque from the gearbox of 7.646 Nm.


The motor terminal connection is connected directly to the PCB of the electronic design being routed through the slipring. The motor assembly contains a encoder for position measurements and it's signal and power connection is also routed through the slipring and connected to the PCB.

### 4.1.6 Assembly

## 4.2 Electronic Hardware

The electronic hardware was a crucial component for the successful implementation of the robotic gymnast. The electronic design provided the means to determine the system characteristic and verification of the simulated model. It will be presented by discussing the various components implemented to achieve the results in this report.

### 4.2.1 System Description

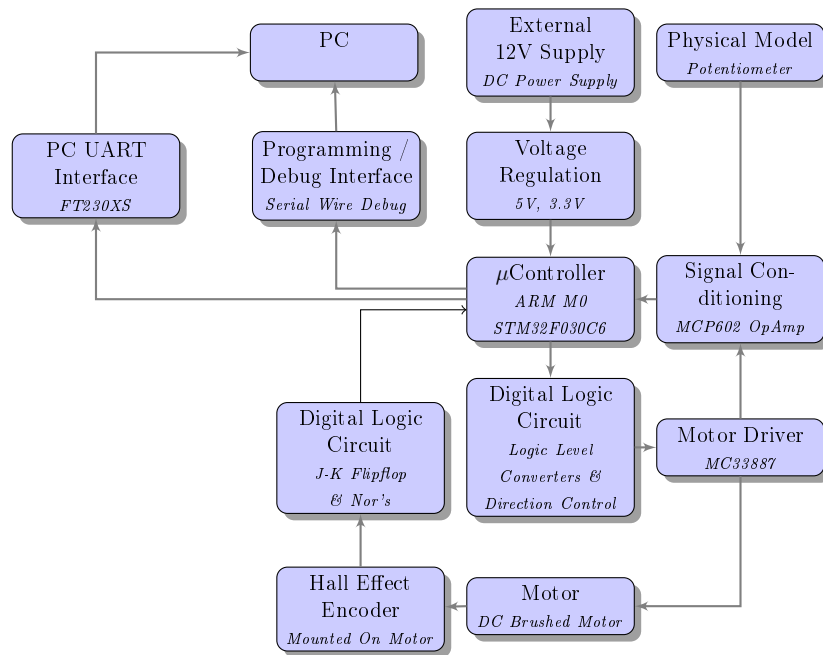

**Figure 4.2:** Electronic System Overview

Figure 4.2 provides a system overview and how the different parts functions together. The micro-controller receives the different signals that has been correctly conditioned from supporting circuitry to interpret the dynamics of the system. From the observed condition it is able to output the correct signals to instruct the next command.

The digital logic circuit that consist of logic level converters acquires the signal from the micro-controller and performs signal conditioning to interface with the motor driver and determines the correct direction to rotate the motor.

The motor driver controls the DC brushed motor based of the digital signals and provides a proportional feedback current that is delivered to unity-gain amplifier.

The motor contains a encoder that indicates the direction and position of the rotor through digital signals that is sent through a digital logic filter to retrieve only critical information from the encoder signals.

The physical model contains a potentiometer that measures the non-actuated pendulums angle and is sent to the buffer.

The microcontroller will use the UART interface as it's data acquisition protocol to send the necessary information to the computer.

The micro-controller is programmed using the Serial Wire Debug (SWD) protocol to transfer the binaries from the computer.

Power is provided using a external 12V power-supply, which will power the motor, but also using a regulator to down convert/step to a 5V and 3.3V to power the microcontoller and the other peripherals.

### **4.2.2 Microcontroller**

The microcontroller chosen is the STM32F030Mxx. The selection was done according the ease of setting up, memory size, physical dimensions and the peripherals it provided.

The STM32F030MXX is based of the ARM M0 architecture which is ARM's entry level micro-controller. It requires little support to have a up and running microcontroller requiring only the SWD protocol to program and a few by-pass capacitors.

It was difficult to determine the memory size specification for the project. This uncertainty ensured that the largest memory size the ARM M0 architecture could provide was selected.

The Electrical and Electronic Department's Printed Circuit Board (PCB) manufacturing machine can only provide a minimum track width 0.3 mm. This resulted in choosing a microcontroller whose footprint would meet the requirement.

Based on the conceptual design, the chosen microcontroller required to contain 2 ADC's, minimum of 5 GPIO's and 1 serial communication peripheral.

Component	Supply Voltage [V]
Digital Logic Components	5
Microcontroller	3.3
Motor Driver	12

**Table 4.3:** Supply Voltage's for the different components

#### 4.2.2.1 Programming / Debug Interface

The *Atollic TrueSTUDIO for ARM 8.0.0* Integrated Development Environment (IDE) is used for writing the source code which converts the source code to the Executable and Linkable Format (.elf) file. These .elf files is then written using the Serial Wire Debug (SWD) protocol to the microcontroller. Debugging of the source code occur using the same IDE which allows the programmer to inspect variables, timers and logic.

#### 4.2.2.2 PC UART Interface

The purpose of the UART to serial communication is for data acquisition of the system response and for debugging purposes. The data being sent follows a structure to ensure the reliability of the data. Figure (ref) shows the format of the data being sent.

The data being sent across the UART to serial circuit is retrieved by a computer executing a Python script, listening for any activity on the computer's driver ports and writing the data into a comma-separated value (csv) file that can later be use to analyse the data.

The UART to serial circuit has been tested by doing a loopback test and using a digital logic analyser to verify the data being sent. The loopback test consist of connecting the Tx and Rx lines together and forcefully echo what has been sent to the circuit to be sent back. Figure (ref) in Appendix XXX shows the digital signals sent and received and confirms the working of the UART to Serial circuit.

### 4.2.3 Voltage Regulation


The various components required different supply voltages in the electronic design. The differenent supply voltage is tabulated in table 4.3.

The table indicates 3 different supply voltages that will be required: 3.3 V, 5 V and 12 V. This was achieved by using a 5 V and 3.3 V linear voltage regulators and the 12 V is supply by a external source.

The schematic for each voltage regulator is shown in Appendix A.5, where each voltage regulator circuit includes a Light Emitting Diode (LED) to ensure the minimum load is met for each regulator. The LED also acts as a visual debugging method.

## 4.2.4 Potentiometer Sensor

### 4.2.4.1 Working Principle

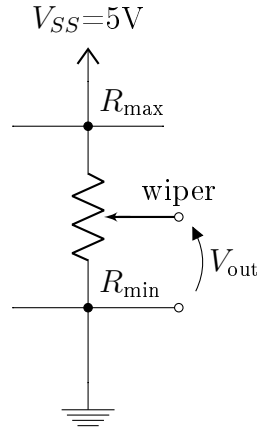


**Figure 4.3:** Simplified Model of a Potentiometer

The rotary position potentiometer consist out of a wiper that is attached to a rotating shaft. This wiper moves across a internal resistor as the shaft rotates and changes the effective resistance across the output terminal. It provides thus a proportional voltage to it's position as seen in Figure 4.3 that indicates the position.

### 4.2.4.2 Interface

The signal produced by the rotary potentiometer varies from 4.95V and 50mV from  $360^\circ$  to  $0^\circ$  respectively. This signal is sent through a simple voltage divider circuit to reduce the signal to 3V and 15mV to be within the sampling limits of the micro-controller. The scaled voltage is sent through a unity gain rail-to-rail amplifier, where the mirrored output signal is fed into the ADC. The type of ADC used in the STM32F030XX is a successive approximation register (SAR) and contains an internal capacitors that suffers from the effect of being depleted if the sampling frequency is to high (stm, 2017). Using an operational amplifier reduces the risk of depleting this internal capacitor because of the low output resistance. The schematic of the circuit is shown in Appendix A.5.

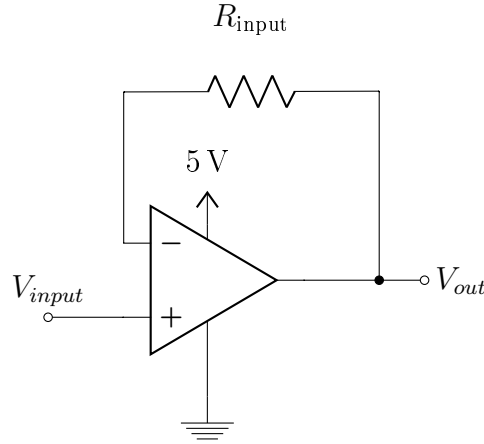


**Figure 4.4:** Unity Gain Amplifier Circuit

## 4.2.5 Magnetic Encoder

### 4.2.5.1 Working Principle

A rotating gear containing ferrous metal teeth is attached to the rotating shaft. The rotating metal teeth rotate near a hall-effect sensor which creates a change in the magnetic flux inside the hall-sensor. This change in magnetic flux is sensed by the hallsensor which produces a digital signal (Instruments, 2006).


### 4.2.5.2 Digital Interface

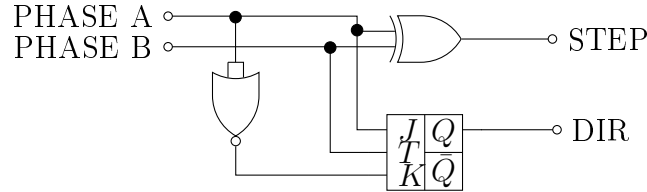

**Figure 4.5:** Digital Logic Circuit containing JK-Flipflops, XOR- and NOR Gates

The encoder contains a solid state hallsensor which provides 2 channels with a  $90^\circ$  phase difference between the channels. (Faulhaber, 2011). These 2 signals undergo a hardware filter that produces 2 signals that indicate the direction of the motor and the incremental position.

The hardware filter consists of XOR, NOR and JK-Flipflop gates shown in Figure 4.5 and the schematic in Appendix A.5. The XOR gate produces the incremental change of position of the motor which is then read by the micro-controller using interrupts on rising and falling edges. The encoder provides

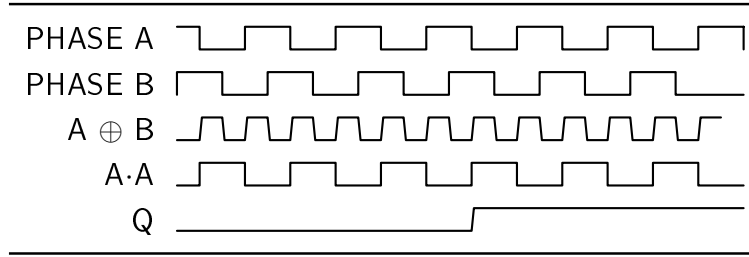


**Figure 4.6:** Waveform of the JK-Flipflop, XOR, and NOR Gate Circuit

16 lines per revolution, equal to a combined 32 rising- & falling edges per line. The encoder provides 2 lines increasing the resolution to 64. The motor is connected to a gearbox with a reduction stage of 14:1. The encoder will thus rotate 14 times per shaft revolution, increasing the resolution to 896 edges per revolution.

The NOR and JK-Flipflop combination produces the direction of the motor by determining whether phase A leads or lags phase B by  $90^\circ$ . This leading or lagging is indicated by a logical 1 or 0 which is read by the microcontroller.

The hardware filter was implemented to reduce the processing time of the micro-controller on the original signals and the waveforms are seen in Figure 4.6.

#### 4.2.6 Motor Driver

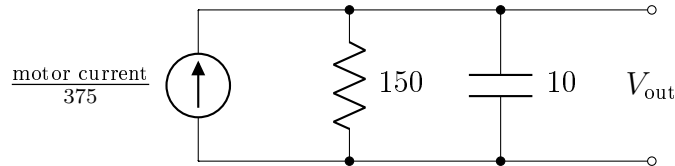

**Figure 4.7:** Simplified Circuit of Motor Feedback

The motor IC chosen is the MC33887. It was selected to be based on providing the motor up to 6A of current, while withstanding the high current transients due to the fast switching of an inductive load (mot, 2007). The motor driver IC provides the motor with 12V DC which is externally provided by a DC power supply. The schematic of the motor driver is shown in Appendix A.5.


The motor driver IC is connected directly to the motor and is responsible for directional and rotational control of the brushed DC motor. The motor driver contains 2 half H-bridges that form a full H-bridge which uses Pulse-Width-Modulated (PWM) to control the speed of the motor and originates from the micro-controller. The selected frequency is 10kHz and is recommended by the



manufacturers mot (2007). As discussed previously, the signals' logic level is first converted and than sent through the AND digital filter before the motor driver receives it.

The MC33887 provides a proportional current of  $\frac{1}{375}$  of the current flowing through the high-side of the full H-bridge (mot, 2007). This current is sent through a resistor of  $150\Omega$  to provide a voltage signal to represent the current. Due to the motor being controlled using PWM, the current is a periodic impulse signal. This problem is overcome by adding a parallel capacitor to the resistor to create a ripple voltage. This ripple voltage is sent through a unity-gain amplifier as seen in Figure 4.4 before it is sampled by the microcontroller. The  $R_{\text{input}}$  resistance is the input resistance that the operational amplifier sees and will be the voltage divider circuit resistance in parallel. This closes the feedback loop to implement torque control by the control system.

#### 4.2.6.1 Logic Level Converters

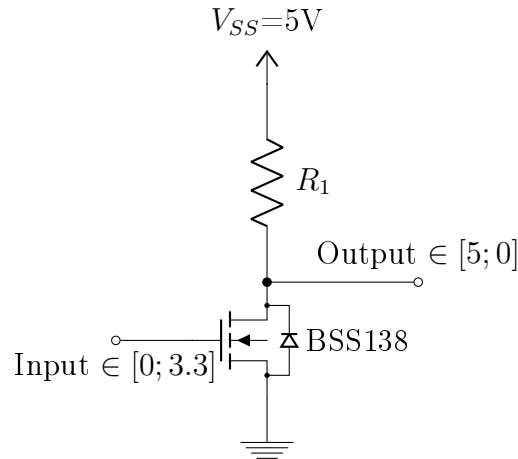


**Figure 4.8:** Logic Level Converter & Inverter Circuit


The microcontroller is required to interface with the motor driver and represent a logical high and low as a 3.3 V and 0 V respectively. The motor driver IC's logical high threshold is 3.5 V. It is thus required to use a logic level converter to allow reliable communication between the two devices.

The logic level converter used is shown in Figure 4.8 and uses the BSS128 transistor. The circuit shown also acts as an inverter where a logic low, 0 V by the microcontroller will be converted to a 5 V and a logic high, 3.3 V will be converted to 0 V. This side effect is overcome by inverting the desired responses in software.

#### 4.2.6.2 AND Digital Circuit

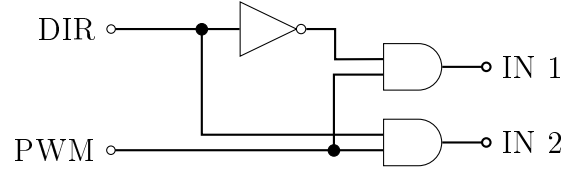

**Figure 4.9:** AND digital logic with inverter

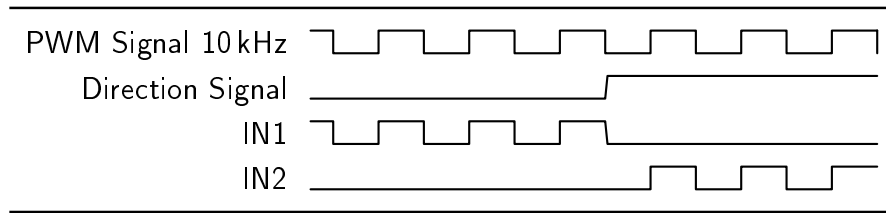

**Figure 4.10:** AND Digital Logic Circuit Waveforms

The AND digital gates in combination with a inverter shown in Figure 4.9 is responsible for providing the motor IC's with the PWM signal on the correct input of the motor IC.

The AND circuit receives 2 signals from the microcontroller after it has been converted to the correct logic level: the PWM signal and a logic level signal indicating the desired direction. Based on the directional signal the AND circuit will switch the PWM signal between the 2 inputs of the motor IC's while holding the other low as seen in Figure 4.10.

This hardware directional control was done in order to reduce the processing time the microcontroller is required to do to switch the generated PWM signal between the 2 inputs of the motor IC.


### 4.2.7 Verification Tests

#### 4.2.7.1 Angle Sensor Measurements

#### 4.2.7.2 Optical Encoder Measurements

#### 4.2.7.3 PWM Duty Cycle to Motor Current

The input to the system is the torque delivered by the motor and the magnitude and direction is determined by the control laws. The model describing

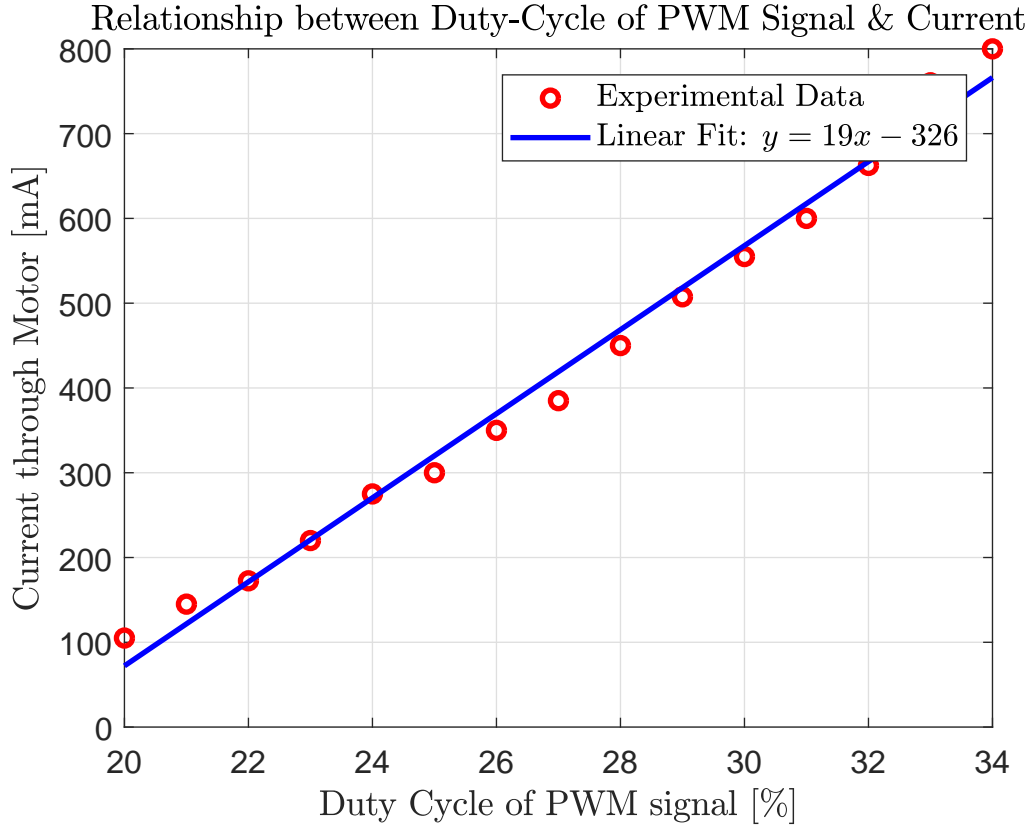

**Figure 4.11:** Relationship between Duty-Cycle of PWM Signal and Current through Motor

the system in equation (A.3) assumes the torque delivered to the system is instantaneously available. This is inaccurate due to the model describing the DC motor is a second-order differential equation containing its own time-constant. This model was not incorporated due adding another control loop would add more delays to the control systems. To overcome this, the torque provided by the motor would be mapped to the duty-cycle the motor receives.

Experiments were done to determine the relationship between the duty-cycle of the PWM signal and the torque delivered by the motor. These experiments are done by incrementing the duty-cycle of the PWM signal that the motor receives when the shaft is kept fix against a hard-stop. The mean value of the output voltage from the circuit shown in 4.7 was measured on the oscilloscope and mapped backwards to determine the torque using equation (4.2) with the constant shown in Table 4.4

$$\tau = \frac{V}{R} \cdot GR \cdot FR \cdot \alpha_t \quad (4.2)$$

Figure 4.11 shows the measured data with a line of best fit. It is clear that there exist a linear relationship between the duty-cycle of the PWM signal and

Constant	Description	Value
GR	Gear Ratio	14
FR	Feedback Current Ratio	375
$\alpha_t$	Torque Constant	$19.1 \times 10^{-3}$
R	Resistance	150

**Table 4.4:** Values of Constants used in Equation (4.2)

the torque provided. This equation of best fit will thus be used to output the correct torque determined by the control system.

# Chapter 5

## Software Design

The software required to allow data acquisition, retrieval of system state information and communication is presented here. The software design played a central role in continuing of the project pass the initial simulation phase. The software design allowed the determination of the system characteristic parameters and the verification of the simulation and controller.

### 5.1 Software Requirements

#### 5.1.1 Data Aquisition

Communication with the microcontroller was implemented using the serial communication from the external computer to the microcontroller. Communication with the microntroller occures differently depending on the state of the system. A *Python* script was used for communication that runs on the external computer.

If experiments are conducted the communication is uni-directional from the microcontroller towards the external computer. The microcontroller streams the state variables of the system to the external computer in specific structure shown in Figure 5.1. The star attached to the variables indicate that they are not sent in the correct units. The reason behind the decision is to reduce the processing time of the microcontroller. Sending data types such as floats are computational hungry and thus these conversions are handled on the external computer.

0	1	2	3	4	5	6	7
\$	time	,	$\theta^*$	,	$\phi^*$	,	$\tau^*$

**Figure 5.1:** Data Structure for Streaming Data during Experiments

The structure used in Figure 5.1 is chosen as comma-seperated values (.csv) which makes it easy to write these data in a .csv file and read them later to analyse the data.

The other state in which communication occured was bi-directional used for debugging purposes. In this state the *Python* script allows the user to type commands adhering to the structure shown in Figure 5.2. Based on the command used, the microcontroller would echo the same command back if it completed the command instructed.

0	1	2	3	4	...	n-1	n
\$	cmd	,	value	value		\r	\n

**Figure 5.2:** Data Structure for Sending Commands

### 5.1.2 Embedded Program

Figure ?? shows the main execution flow of the microcontroller based on factors that influence their states. A brief overview of the execution flow is describe below.

On startup of the microcontroller, it will initialise the various peripherals required for operation. They include timers for PWM generation, ADC and interrupts for encoder signals. The microcontroller will than initialise the various variables required for operation.

Once initialisation is completed the microcontroller will check via an interrupt if a byte over the serial communication has been received. If a byte has been received it, the microncontroller will verify the command structure and execute based on this command.

Every 0.1ms the microcontroller will inspect the data arrays of the sampled signals. Direct Memory Access (DMA) is used for sampling and results in these sampling data being automatically refreshed by hardware.

The micrcontroller will than react whether a interrupt has occur to indicate a rising or falling edge of the encoder signal. This falling and rising edge indicates a incremental change of the position of the actuated pendulum the microcontroller will behave accordingly.

The microcontroller will then verify whether it is required to stream the data every 1ms to the external computer.

# Chapter 6

## Practical Results

### 6.1 Swingup Controller

### 6.2 Balancing Controller

### 6.3 Swingup and Balancing



# Chapter 7

## Conclusion

### 7.1 Summary

### 7.2 Recommendation

# Appendices

# Appendix A

## A.1 Derivation of the Mathematical Model

$$x_1 = l_1 \cos(\theta)$$

$$y_1 = -l_1 \sin(\theta)$$

$$x_2 = L_1 \sin(\theta) + l_2 \sin(\theta + \phi)$$

$$y_2 = -L_1 \cos(\theta) - l_2 \cos(\theta + \phi)$$

$$\dot{x}_2 = L_1 \cos(\theta) \dot{\theta} - l_2 \cos(\theta + \phi) (\dot{\theta} + \dot{\phi})$$

$$\dot{y}_2 = L_1 \sin(\theta) \dot{\theta} + l_2 \sin(\theta + \phi) (\dot{\theta} + \dot{\phi})$$

$$x_2^2 = L_1^2 \cos(\theta)^2 \theta^2 + l_2^2 \cos(\theta + \phi)^2 (\dot{\theta} + \dot{\phi})^2 + 2L_1 l_2 \dot{\theta} (\dot{\theta} + \dot{\phi}) \cos(\theta) \cos(\theta + \phi)$$

$$y_2^2 = L_1^2 \sin(\theta)^2 \theta^2 + l_2^2 \sin(\theta + \phi)^2 (\dot{\theta} + \dot{\phi})^2 + 2L_1 l_2 \dot{\theta} (\dot{\theta} + \dot{\phi}) \sin(\theta) \sin(\theta + \phi)$$

$$x_2^2 + y_2^2 = L_1^2 \theta^2 [\cos(\theta)^2 + \sin(\theta)^2] + l_2^2 (\dot{\theta} + \dot{\phi})^2 [\cos(\theta + \phi)^2 + \sin(\theta + \phi)^2] +$$

$$2L_1 l_2 \dot{\theta} (\dot{\theta} + \dot{\phi}) [\cos(\theta) \cos(\theta + \phi) + \sin(\theta) \sin(\theta + \phi)]$$

Using the following trigonometric identities

$$\cos(\gamma)^2 + \sin(\gamma)^2 = 1$$

$$\cos(\gamma) \cos(\alpha) + \sin(\gamma) \sin(\alpha) = \cos(\gamma - \alpha)$$

the above equation resolves to:

$$V_2^2 = L_1 \dot{\theta}^2 + l_2^2 (\dot{\theta} + \dot{\phi})^2 + 2L_1 l_2 (\dot{\theta} + \dot{\phi}) \dot{\theta} \cos(\phi)$$

The kinetic energy in the system consist of the fixed rotation of the under-actuated pendulum and the rotation and velocity of the actuated pendulum.

$$T = \frac{1}{2}I_A\dot{\theta}^2 + \frac{1}{2}I_B(\dot{\theta} + \dot{\phi})^2 + \frac{1}{2}m_2V_2^2$$

$$T = \frac{1}{2}I_A\dot{\theta}^2 + \frac{1}{2}I_B(\dot{\theta} + \dot{\phi})^2 + \frac{1}{2}m_2[L_1\dot{\theta}^2 + l_2^2(\dot{\theta} + \dot{\phi})^2 + 2L_1l_2(\dot{\theta} + \dot{\phi})\dot{\theta}\cos(\phi)]^2$$

The potential energy in the system is defined as

$$V = -m_1gl_1\cos(\theta) - m_2g[L_1\cos(\theta) + l_2\cos(\theta + \phi)]$$

The Lagrange is defined as

$$\mathcal{L} = T - V$$

$$\mathcal{L} = \frac{1}{2}I_A\dot{\theta}^2 + \frac{1}{2}I_B(\dot{\theta} + \dot{\phi})^2 + \frac{1}{2}m_2[L_1\dot{\theta}^2 + l_2^2(\dot{\theta} + \dot{\phi})^2 + 2L_1l_2(\dot{\theta} + \dot{\phi})\dot{\theta}\cos(\phi)]^2 + m_1gl_1\cos(\theta) + m_2g[L_1\cos(\theta) + l_2\cos(\theta + \phi)]$$

$$\frac{\partial \mathcal{L}}{\partial \theta} = -m_1gl_1\sin(\theta) - m_2gL_1\sin(\theta) - m_2gl_2\sin(\theta + \phi)$$

$$\frac{d}{dt}\frac{\partial \mathcal{L}}{\partial \dot{\theta}} = I_A\ddot{\theta} + I_B\ddot{\theta} + I_B\ddot{\phi} + m_2L_1^2\ddot{\theta} + m_2l_2^2\ddot{\theta} + m_2l_2\ddot{\phi} + 2m_2L_1l_2\ddot{\theta}\cos(\phi) - 2m_2L_1l_2\dot{\theta}\dot{\phi}\sin(\phi) + m_2L_1l_2\ddot{\phi}\cos(\phi) - m_2L_1l_2\dot{\phi}^2\sin(\phi)$$

$$\frac{\partial \mathcal{L}}{\partial \phi} = -m_2L_1l_2(\dot{\theta} + \dot{\phi})\dot{\theta}\sin(\phi) - m_2gl_2\sin(\theta + \phi)$$

$$\frac{d}{dt}\frac{\partial \mathcal{L}}{\partial \dot{\phi}} = I_B\ddot{\theta} + I_B\ddot{\phi} + m_2l_2^2\ddot{\theta} + m_2l_2^2\ddot{\phi} + m_2L_1l_2\ddot{\theta}\cos(\phi) - m_2L_1l_2\dot{\theta}\dot{\phi}\sin(\phi)$$

The differential equation describing the dynamics of the system is

$$\frac{d}{dt}\frac{\partial \mathcal{L}}{\partial \dot{\vec{q}}} - \frac{\partial \mathcal{L}}{\partial \vec{q}} = B(\dot{q}) + \tau(q)$$

where  $q = \begin{bmatrix} \theta \\ \phi \end{bmatrix}$

## A.2 Collocated Linearisation

$$d_{11}\ddot{\theta} + d_{12}\ddot{\phi} + h_1 + \psi_1 = 0 \quad (\text{A.1})$$

$$d_{21}\ddot{\theta} + d_{22}\ddot{\phi} + h_2 + \psi_2 = \tau \quad (\text{A.2})$$

Starting from the condense equation (A.1) and (A.3),  $\ddot{q}_1$  is solved in equation (A.1) and substituted in (A.3) resulting in

$$\bar{d}_2\ddot{\theta} + \bar{h}_2 + \bar{\psi}_2 = \tau \quad (\text{A.3})$$

where the newly defined terms are given as:

$$\bar{d}_2 = d_{22} - \frac{d_{21}d_{12}}{d_{11}}$$

$$\bar{h}_2 = h_2 - \frac{d_{21}h_1}{d_{11}}$$

$$\bar{\psi}_2 = \psi_2 - \frac{d_{21}\psi_1}{d_{11}}$$

$\tau$  can now chosen to linearise the terms in equation (A.3) as:

$$\tau = \bar{d}_2\ddot{\theta} + \bar{h}_2 + \bar{\psi}_2$$

## A.3 Taylor Series Expansion Around Unstable Equilibrium Position

## A.4 Communication Structure


0	1	2	3	4	...	n-1	n
\$	cmd	,	value	value		\r	\n

**Figure A.1:** Data Structure for Sending Commands


In Table A.1 the various commmands that are used in the command structure shown in Figure A.1 used for debugging purposes is explained with the possible value ranges that can be used.

## A.5 Electronic Design Schematic


POTENTIOMETER SIGNAL CONDITIONING

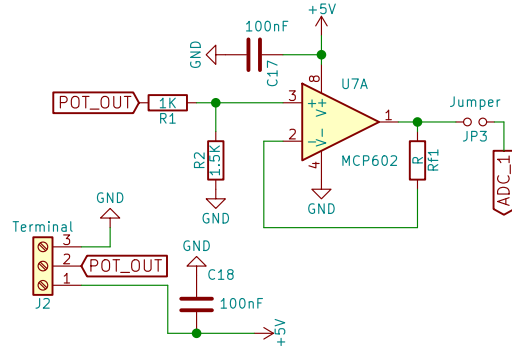


BUFFER  
CURRENT SENSE SIGNAL CONDITIONING

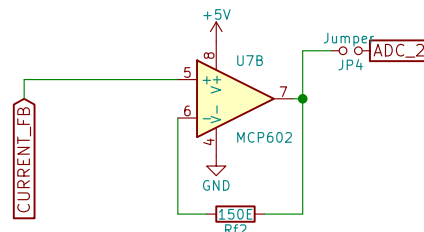


POWER SUPPLY CONNECTION 5V

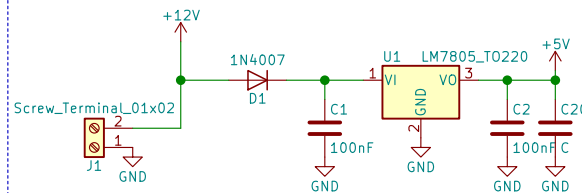


POWER SUPPLY CONNECTION 3.3V

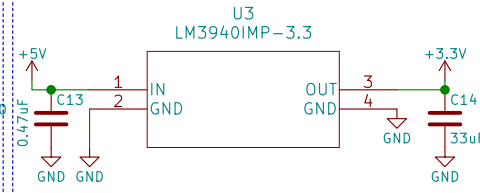




UART TO SERIAL

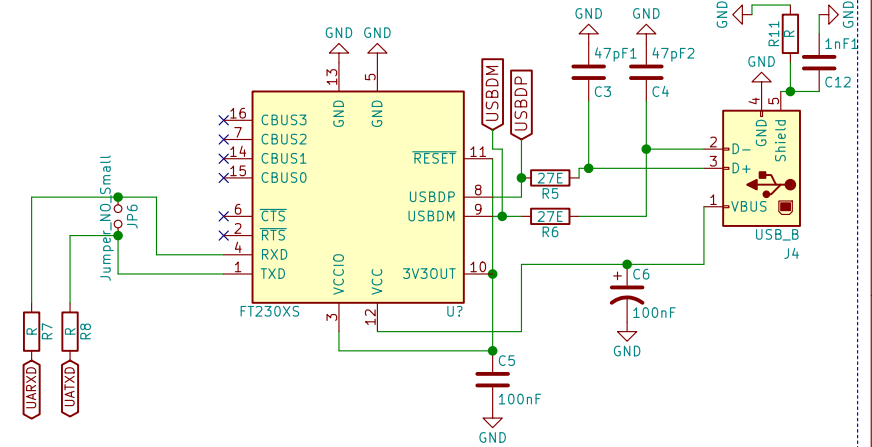

MOTOR CONTROLLER & CURRENT SENSE IC

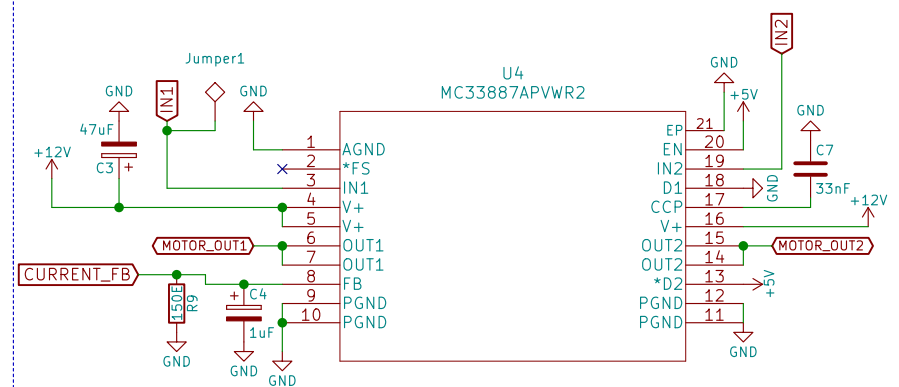

PROGRAMMING PINS




Sheet: /  
File: Acrobat.sch

**Title:** Acrobat Schematic


Size: A4 Date:  
KiCad E.D.A. eeschema 4.0.7

**Rev:**  
Id: 1/3


## ENCODER SIGNAL CONDITIONING

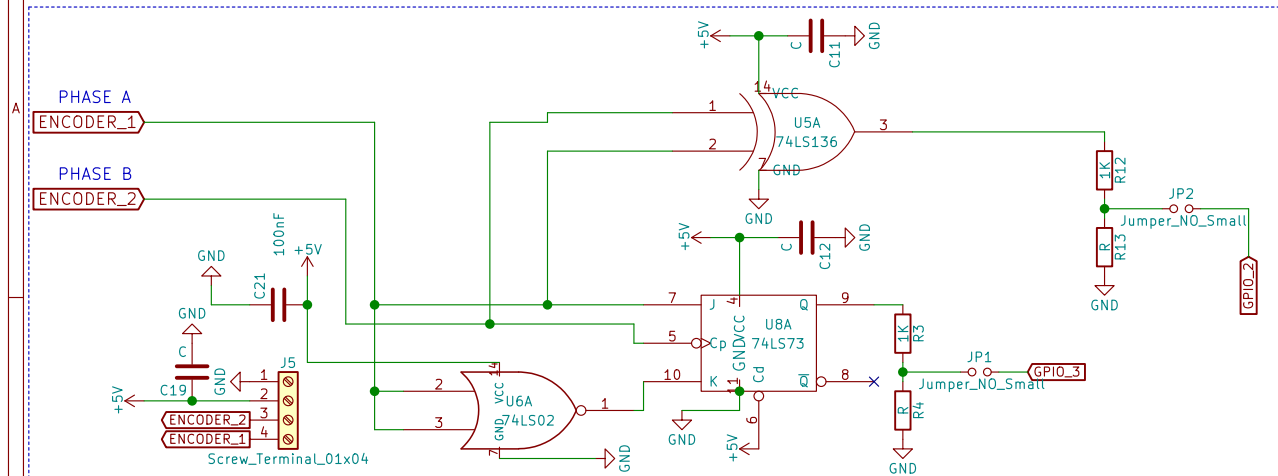


## LOGIC LEVEL CONVERTERS

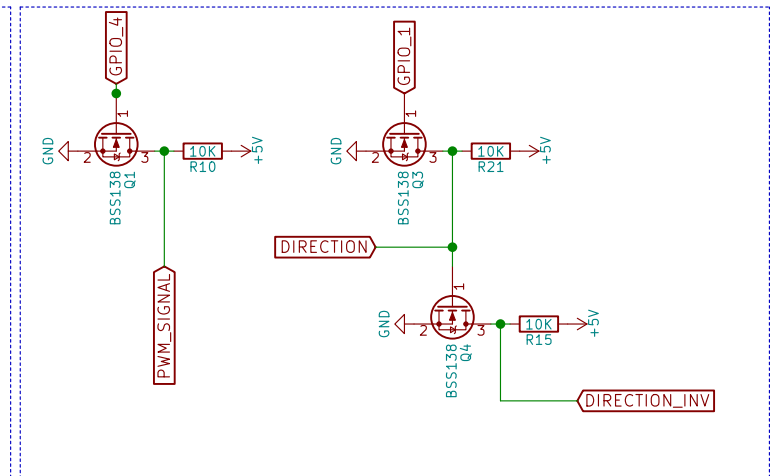


## LOGIC DIR CONTROLLERS

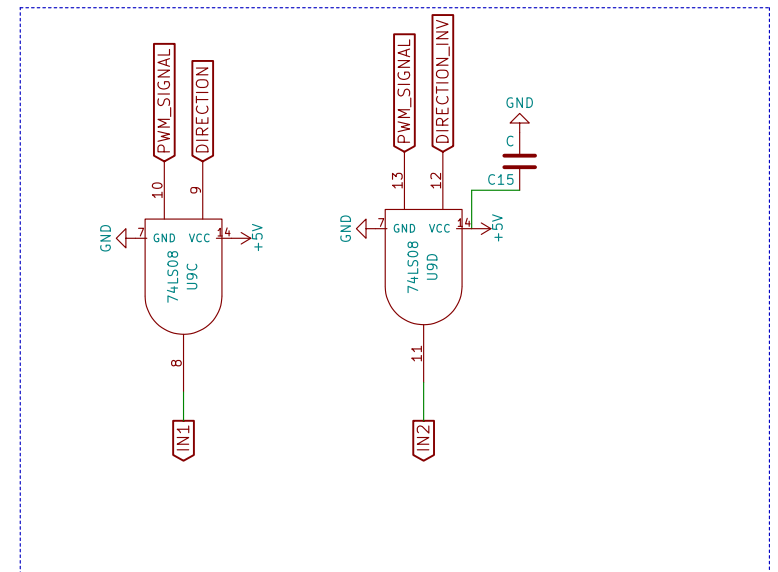

## POWER - ON CIRCUIT

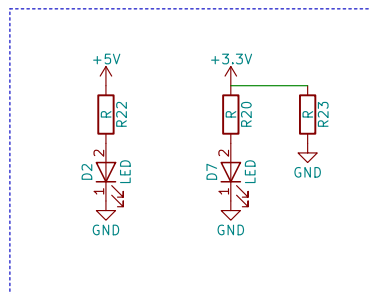

## DEBUGGING LEDS

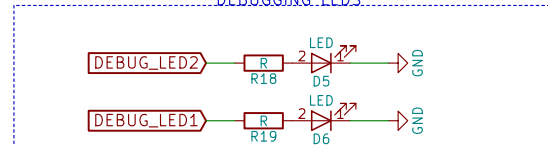

Sheet: /misc/  
File: misc.sch

**Title:**


Size: A4

Date:

KiCad E.D.A. eeschema 4.0.7

**Rev:**

Id: 2/3

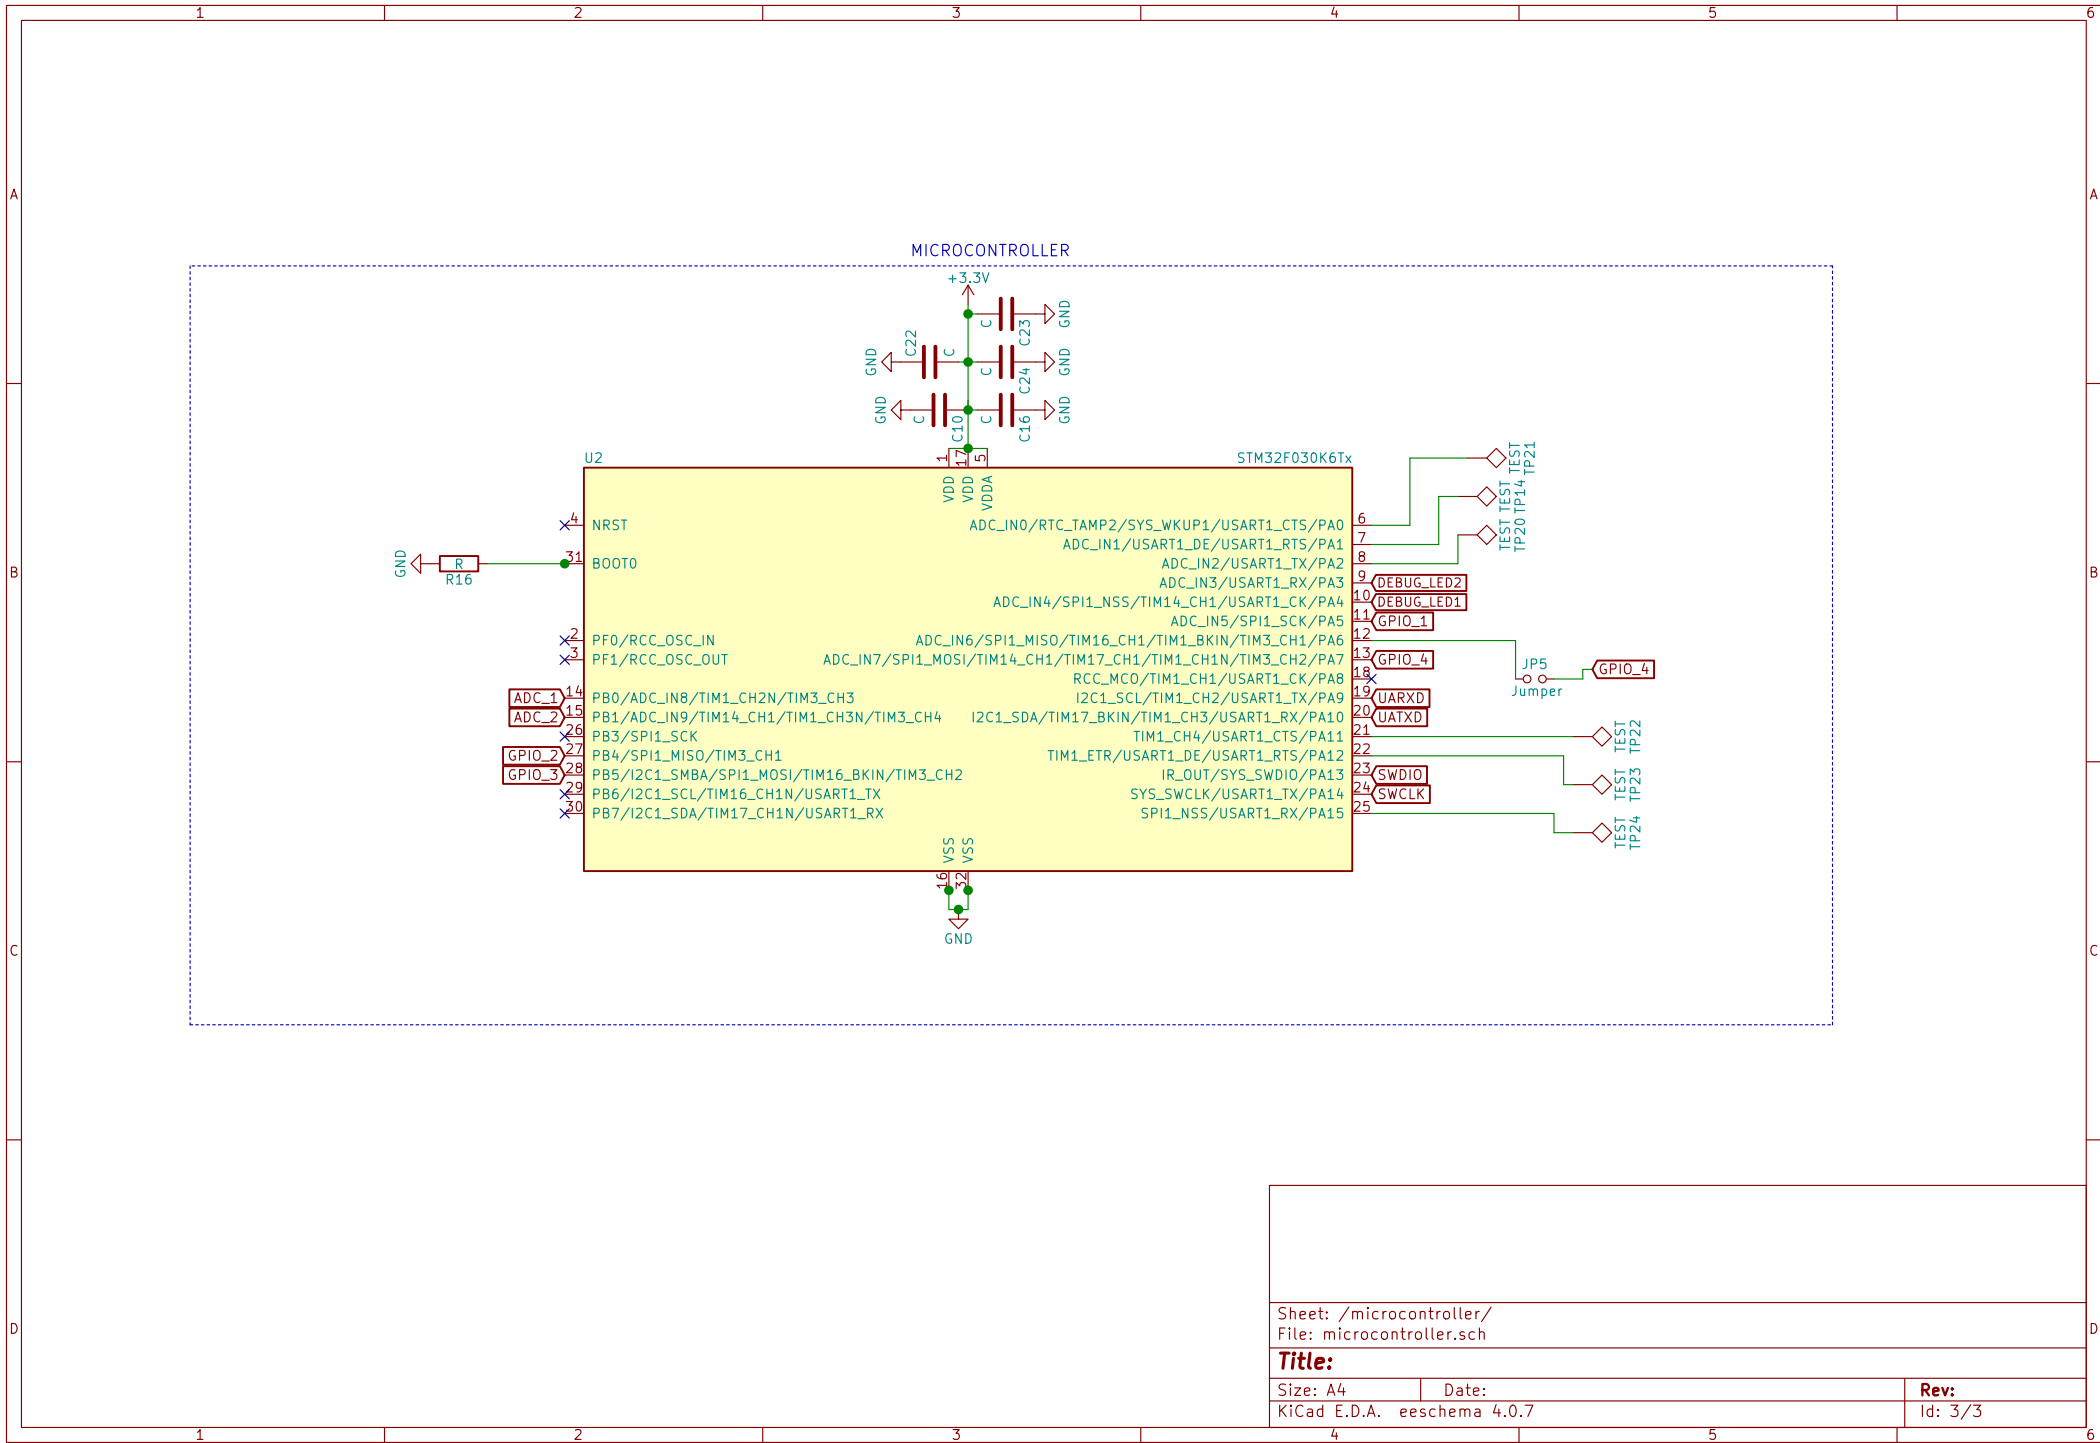



Command	Range	Effect
A		
B		3.3
C		12

**Table A.1:** Summary of Communication Commands and their Effects

# List of References

- (1990). A case study in approximate linearization: The acrobat example. *Proc. American Control Conference*.
- (1995). The swing up control problem for the acrobat. *IEEE Control Systems*, vol. 47, no. 10, pp. 50–55.
- (2002). An explicit description of null controllable regions of linear systems with saturating actuators. *Systems & Control Letters*, vol. 47, no. 10, pp. 65–78.
- (2006). On stabilization of an inverted double pendulum with one control torque. *Journal of Compute and Systems Science International*, vol. 45, no. 3, pp. 337–334.
- (2007 2). *5.0 A H-Bridge with Load Current Feedback*. Freescale Semiconductor, 12th edn. Document Number: MC33887.
- (2017). *How to get the best ADC accuracy in the STM32 microcontrollers*. ST Electronics.
- Faulhaber (2011). *Encoders, Magnetic Encoder, Series IE2-16*. Faulhaber, 11th edn.
- Gene F. Franklin, J. David Powell, e.a. (2015). *Feedback Control of Dynamic Systems*. 7th edn. Pearson Education Limited, Edingburgh Gate, Harlow, Essex CM20 2JE, England. ISBN 1-29-206890-6.
- Instruments, N. (2006 9). *Magnetic Encoder Fundamentals*. 10. National Instruments, The address.