


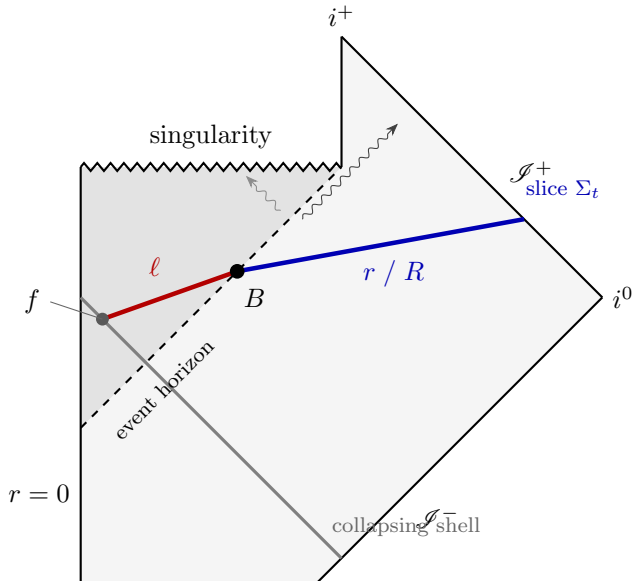


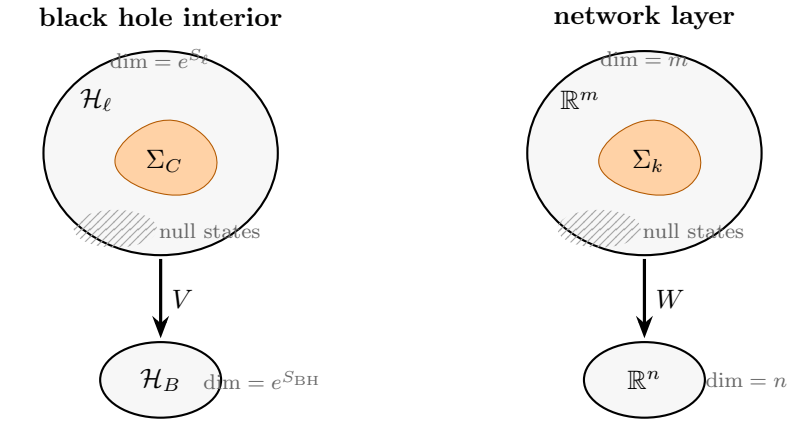


$$\sup_{x,y\in\Sigma} \left|\langle Vx, Vy\rangle - \langle x, y\rangle\right| \lesssim \sqrt{\log|\Sigma| \,/\, \beta \dim}$$

one theorem: $\beta = 2$ and Σ = low complexity (left); $\beta = 1$ and Σ = sparse (right)

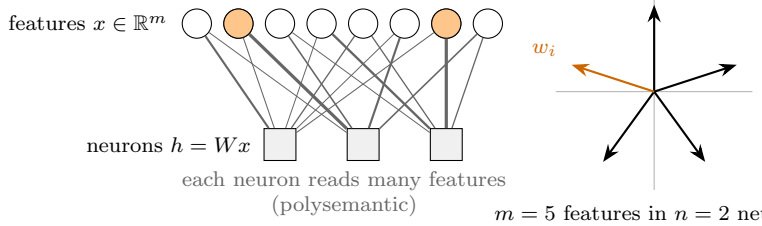

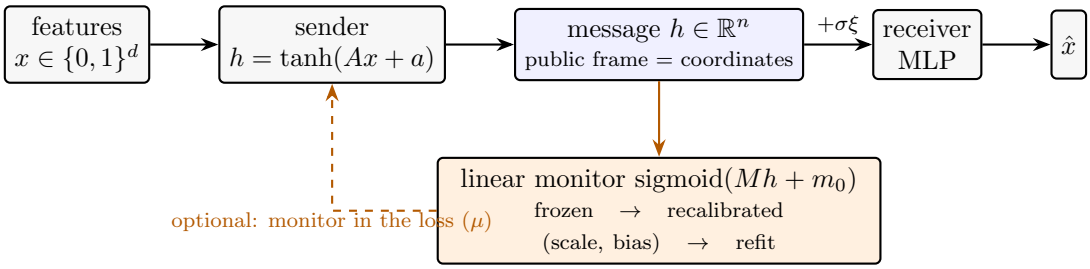

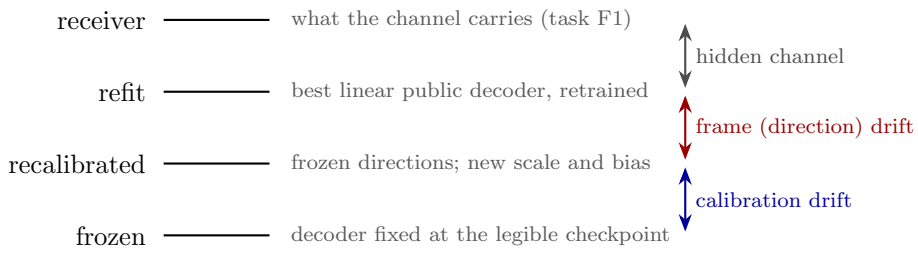
receiver
what the channel carries (task F1)
refit
best linear public decoder, retrained
recalibrated
frozen directions; new scale and bias
frozen
decoder fixed at the legible checkpoint
hidden channel
frame (direction) drift
calibration drift