





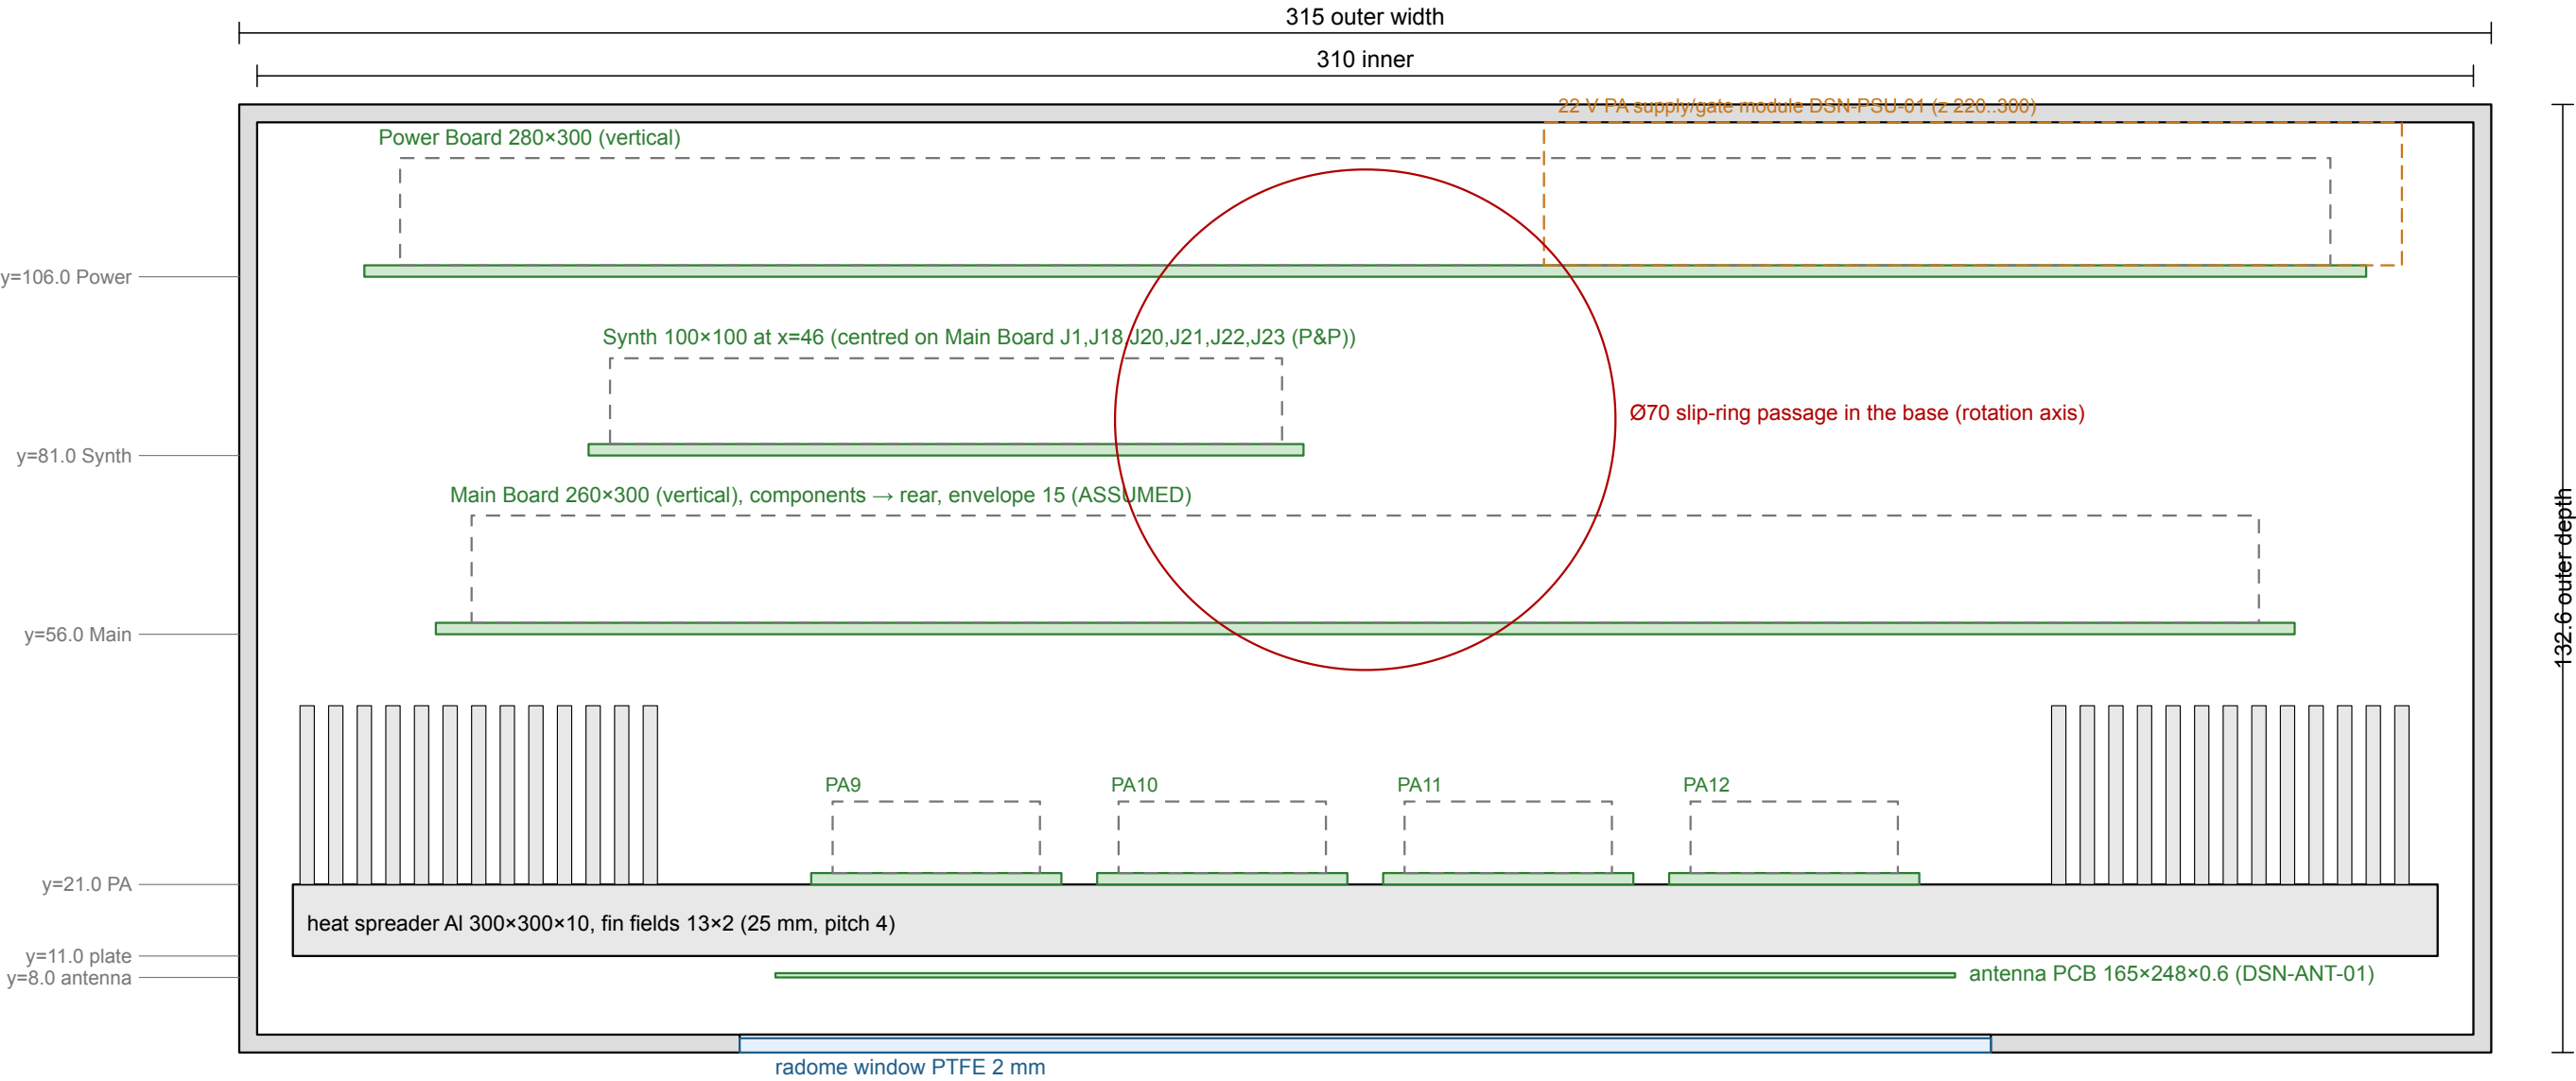

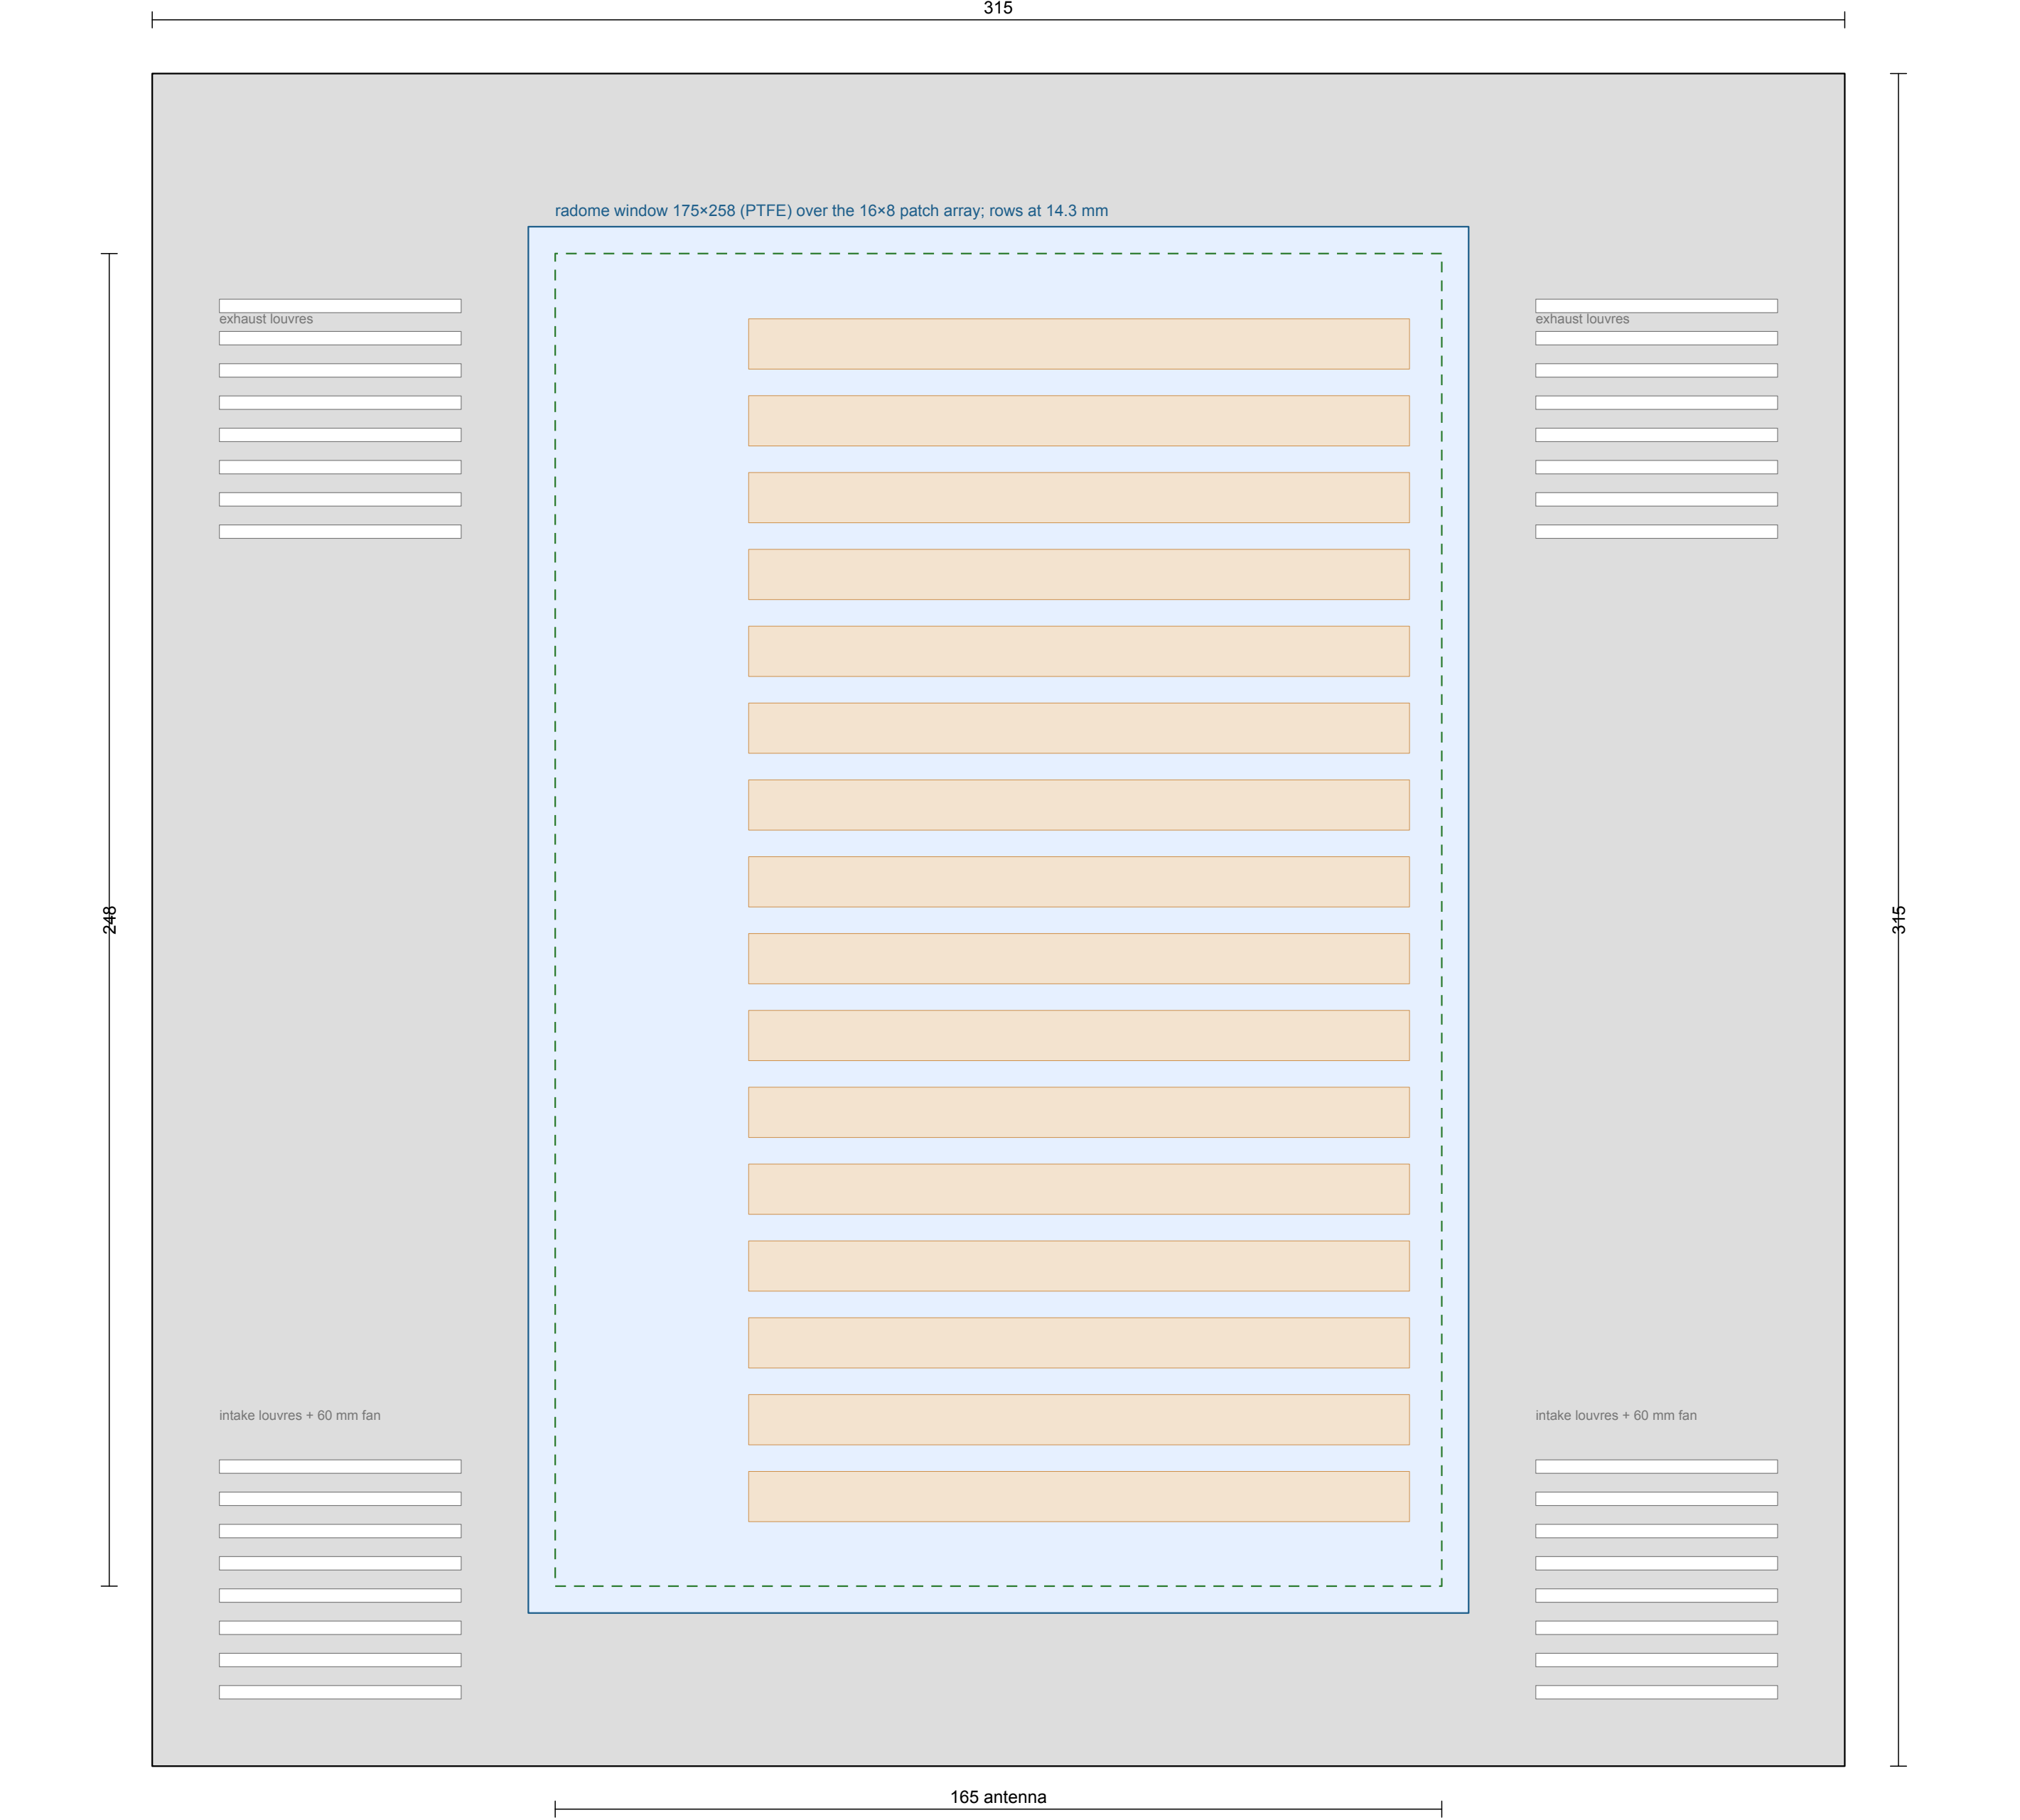

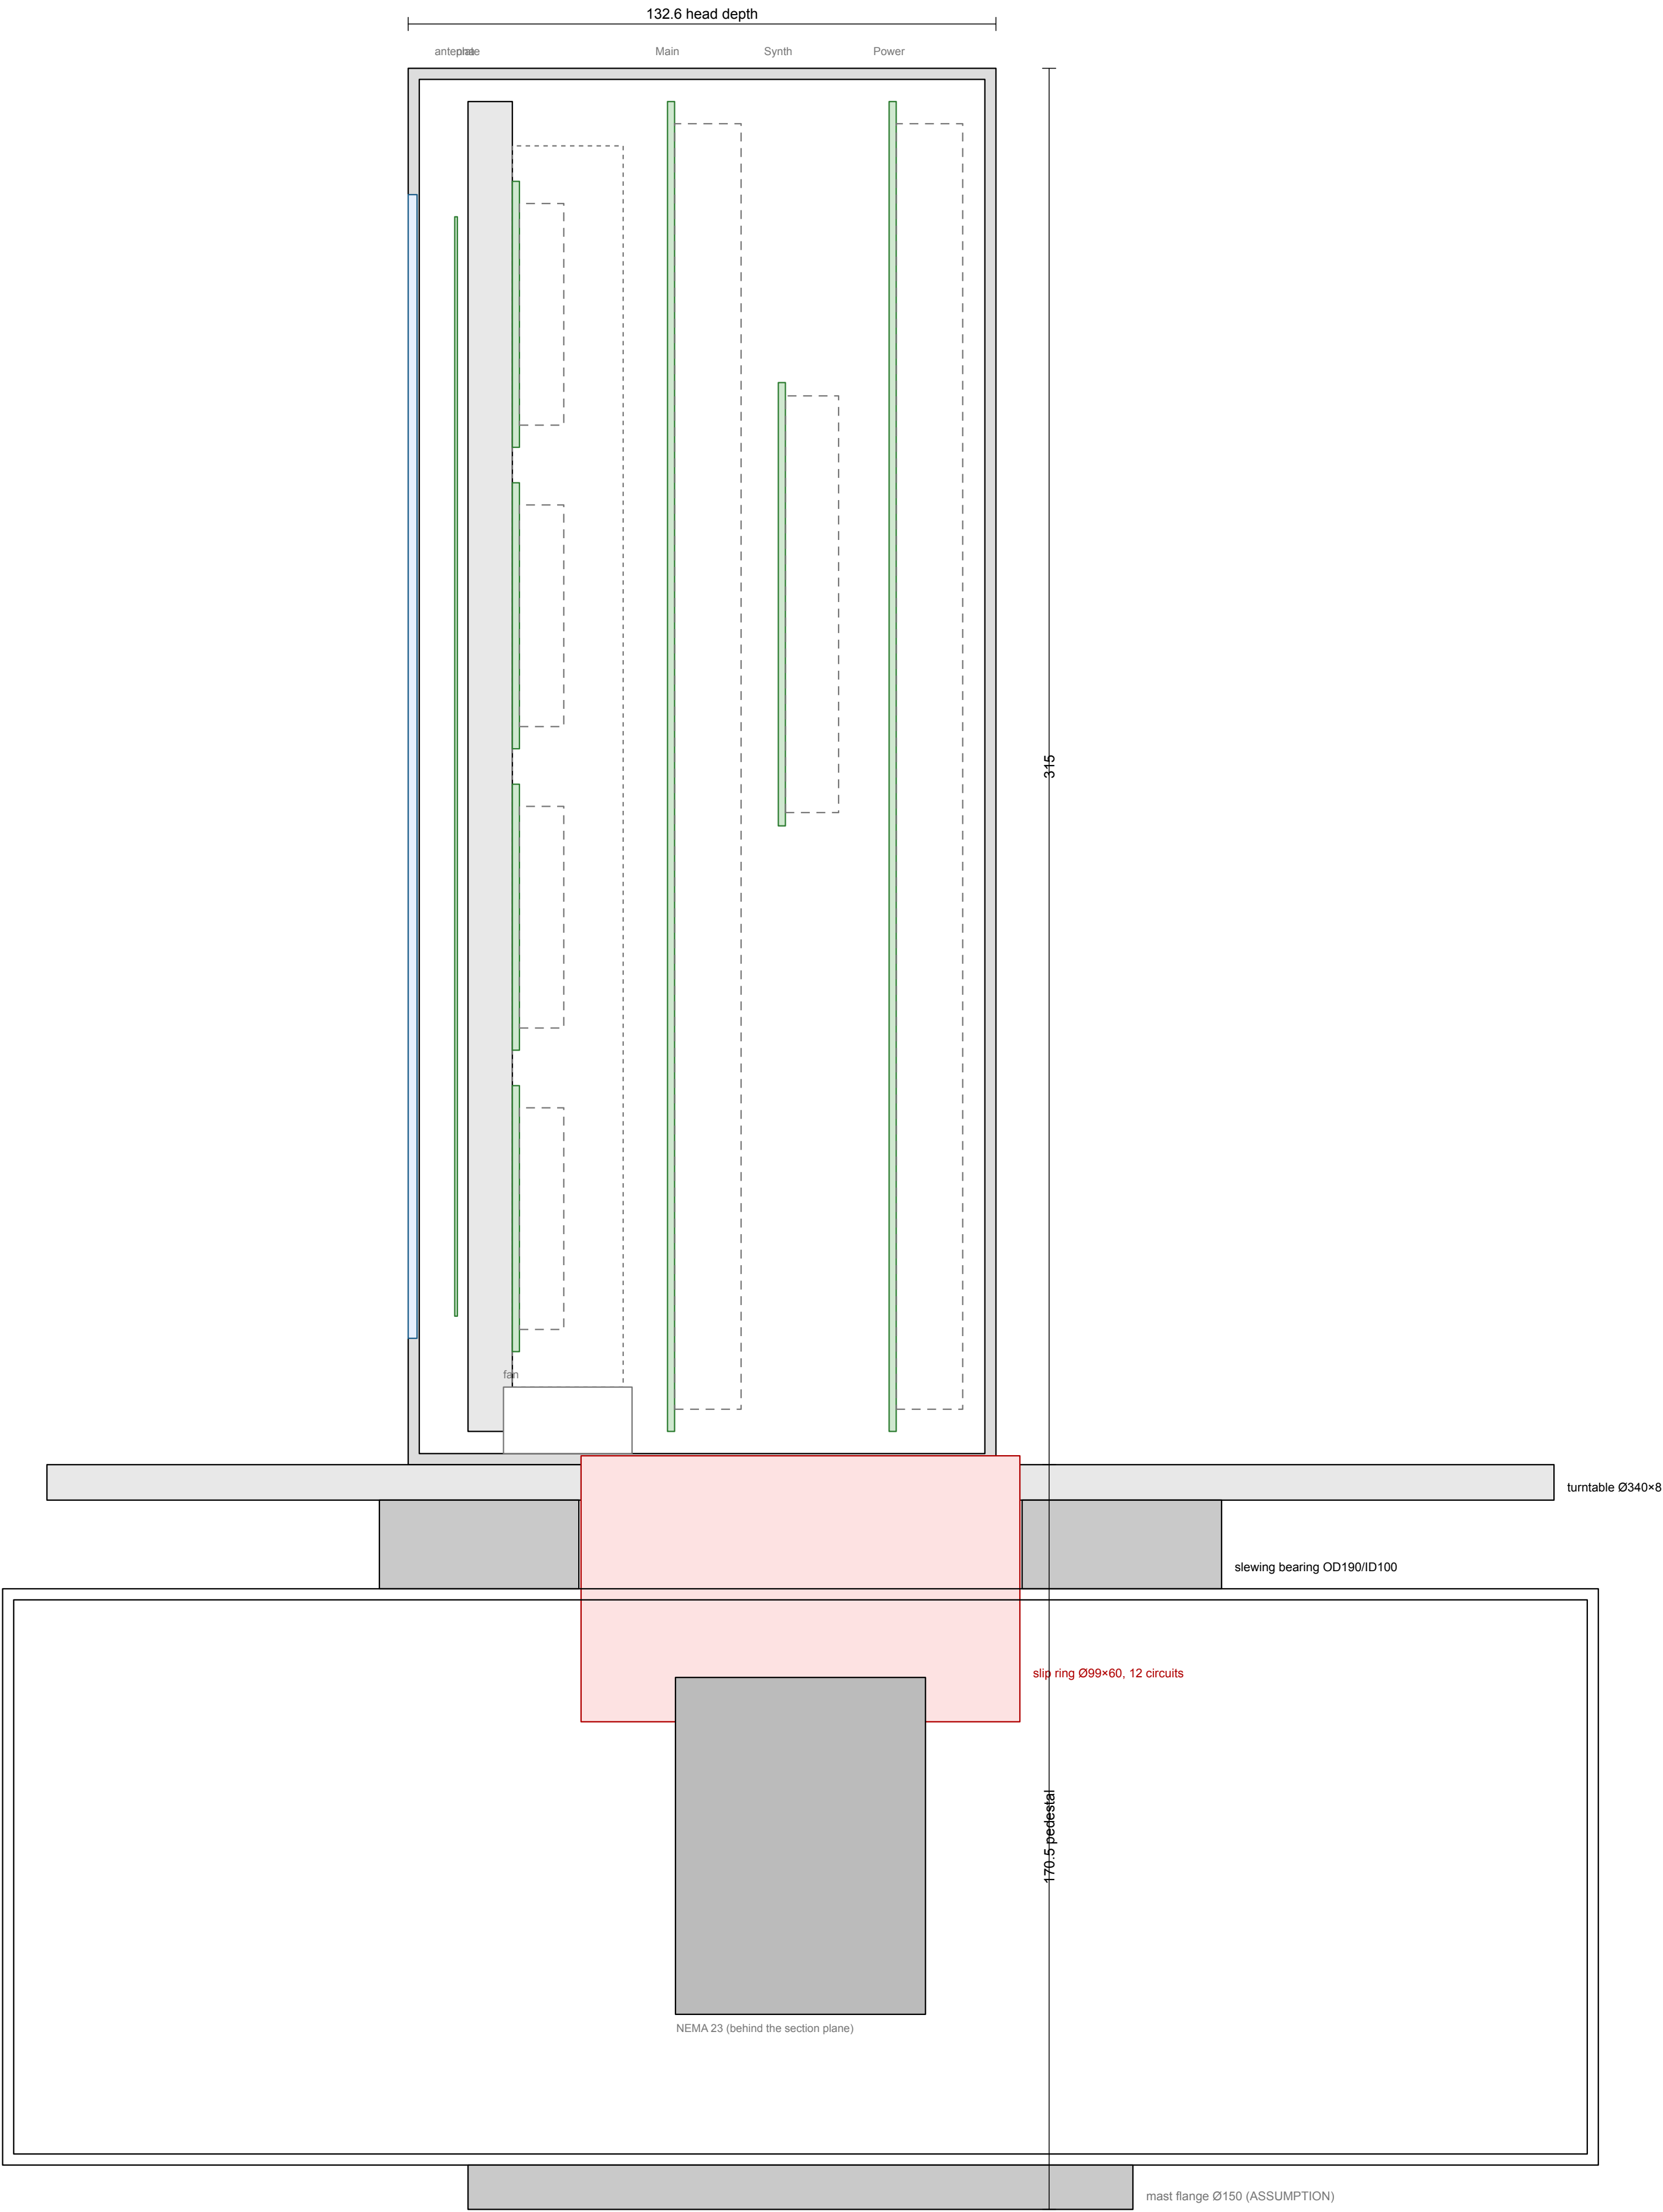

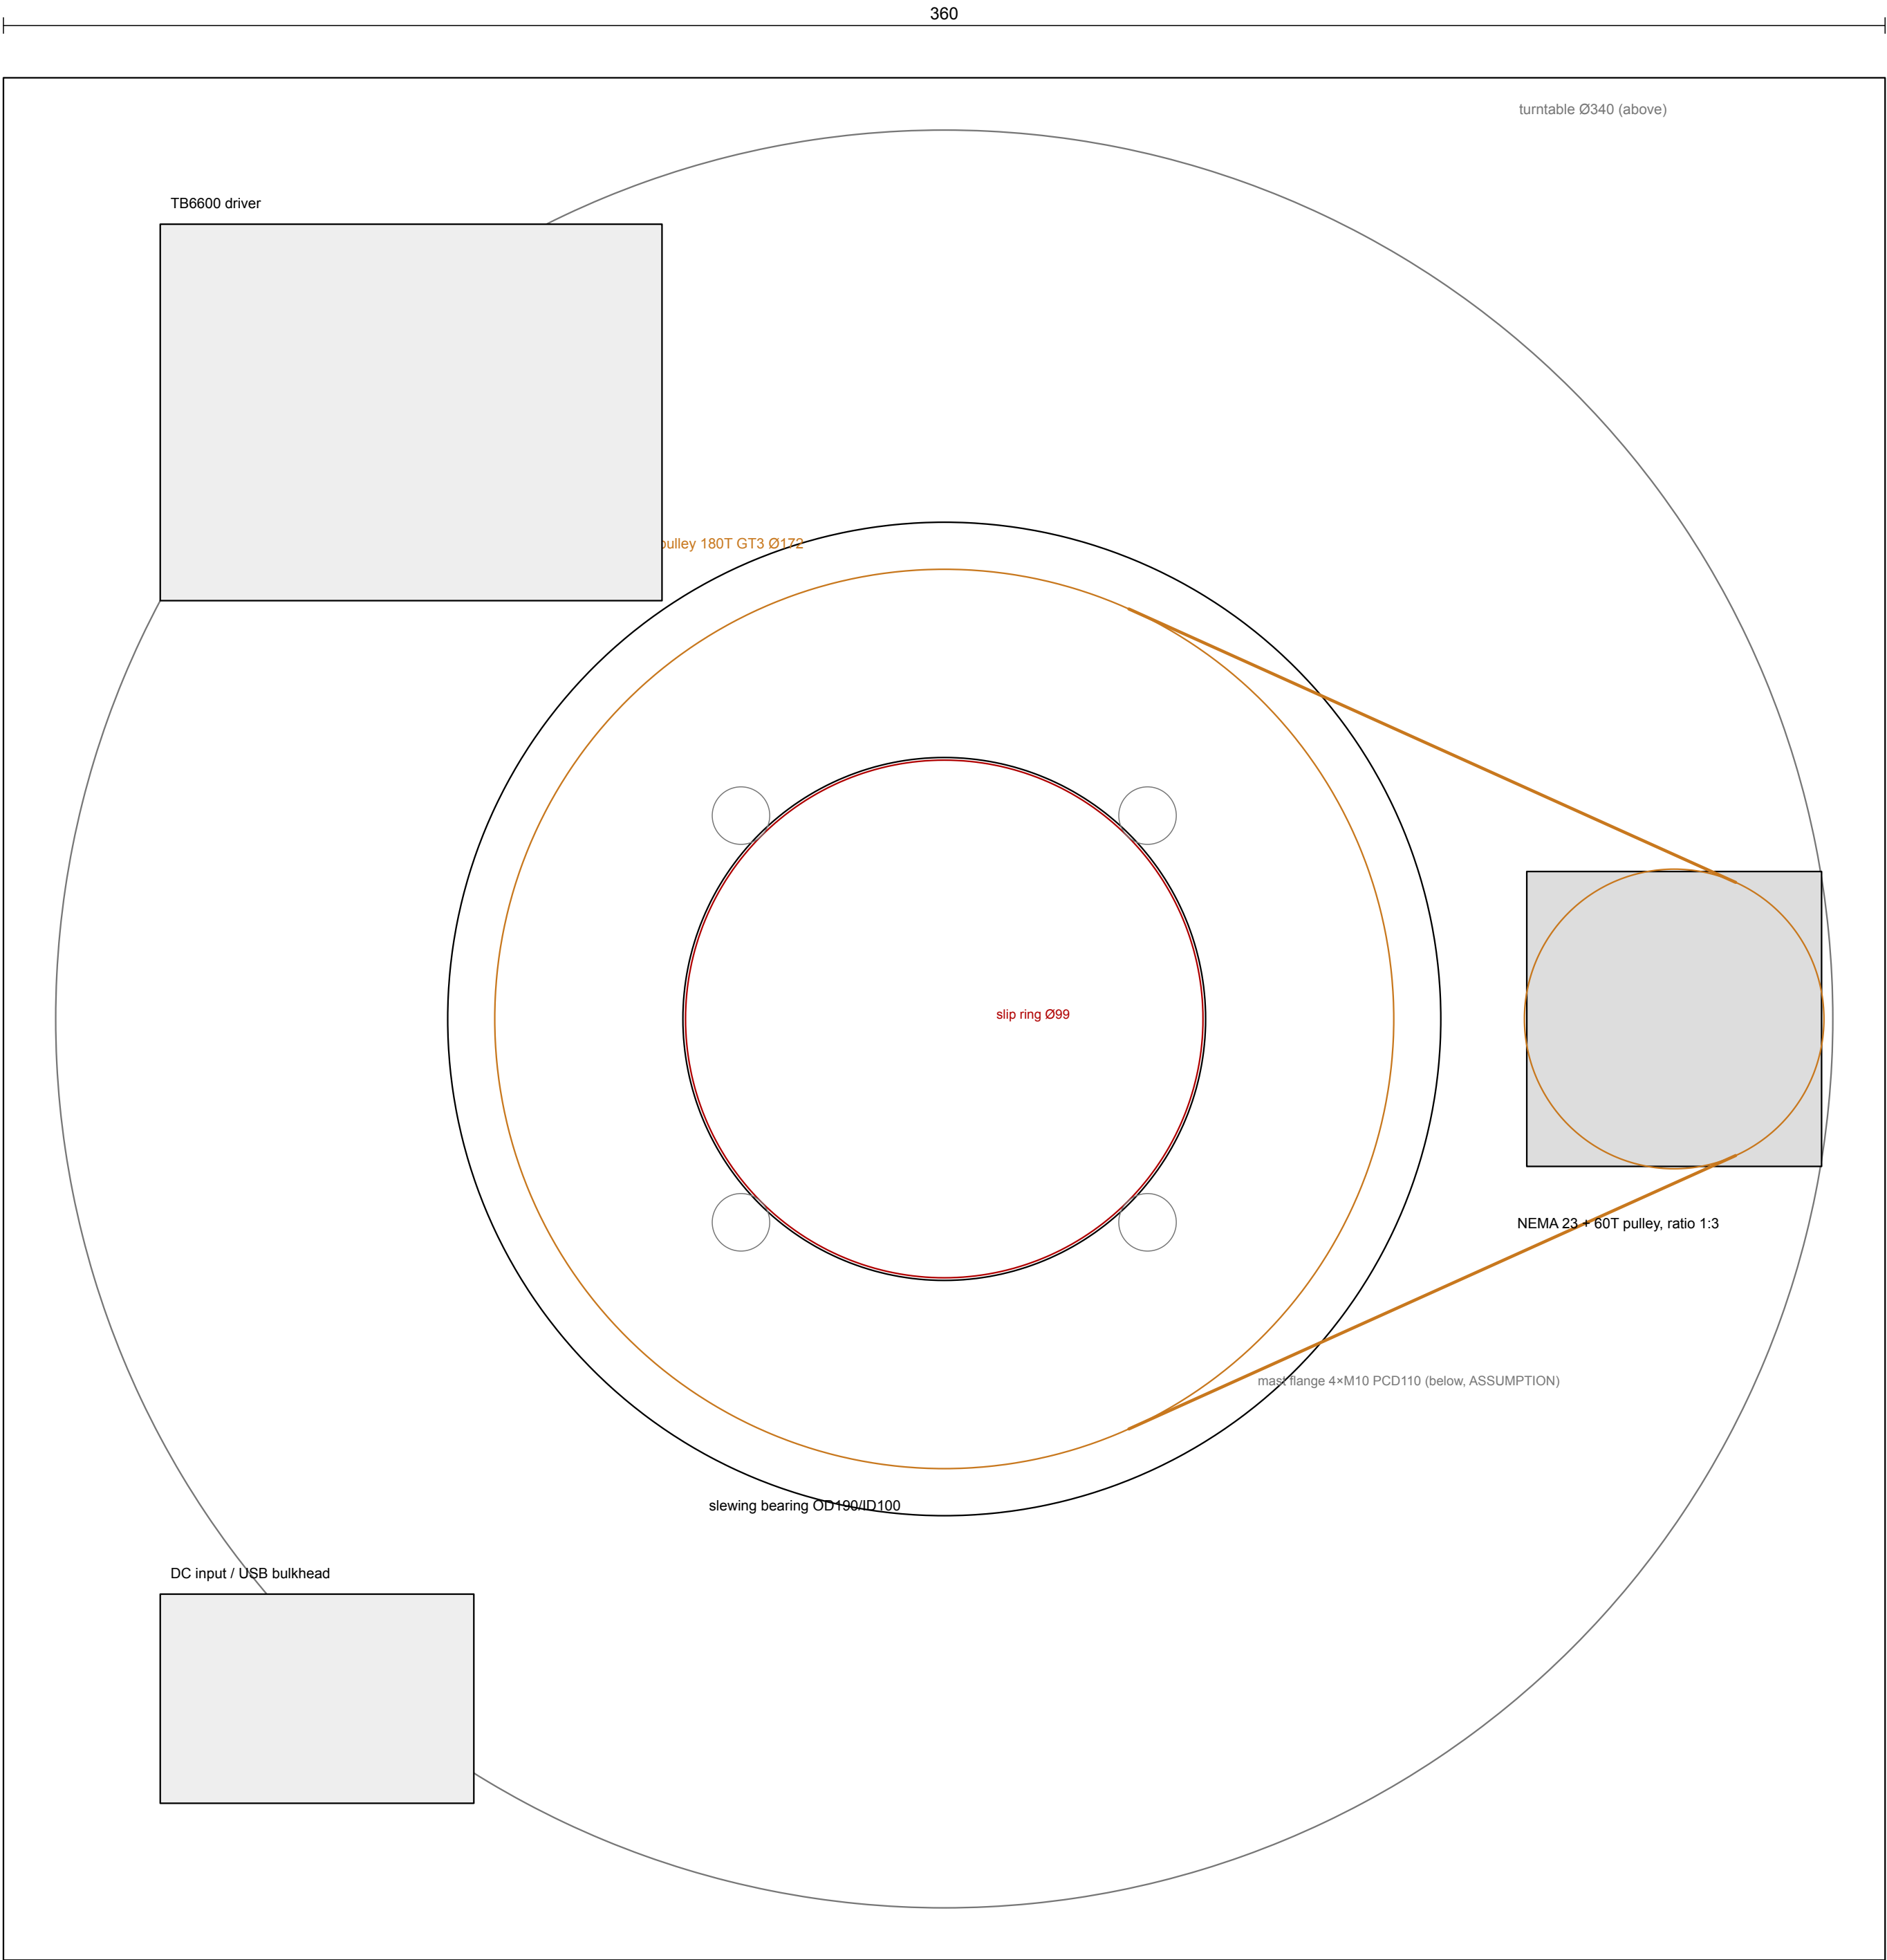

firmware change required with ratio 1:3: Stepper_steps = 600 (main.cpp:195) so that 4×3 = 12 pulses give 7.2° at the table; TB6600 at full step