

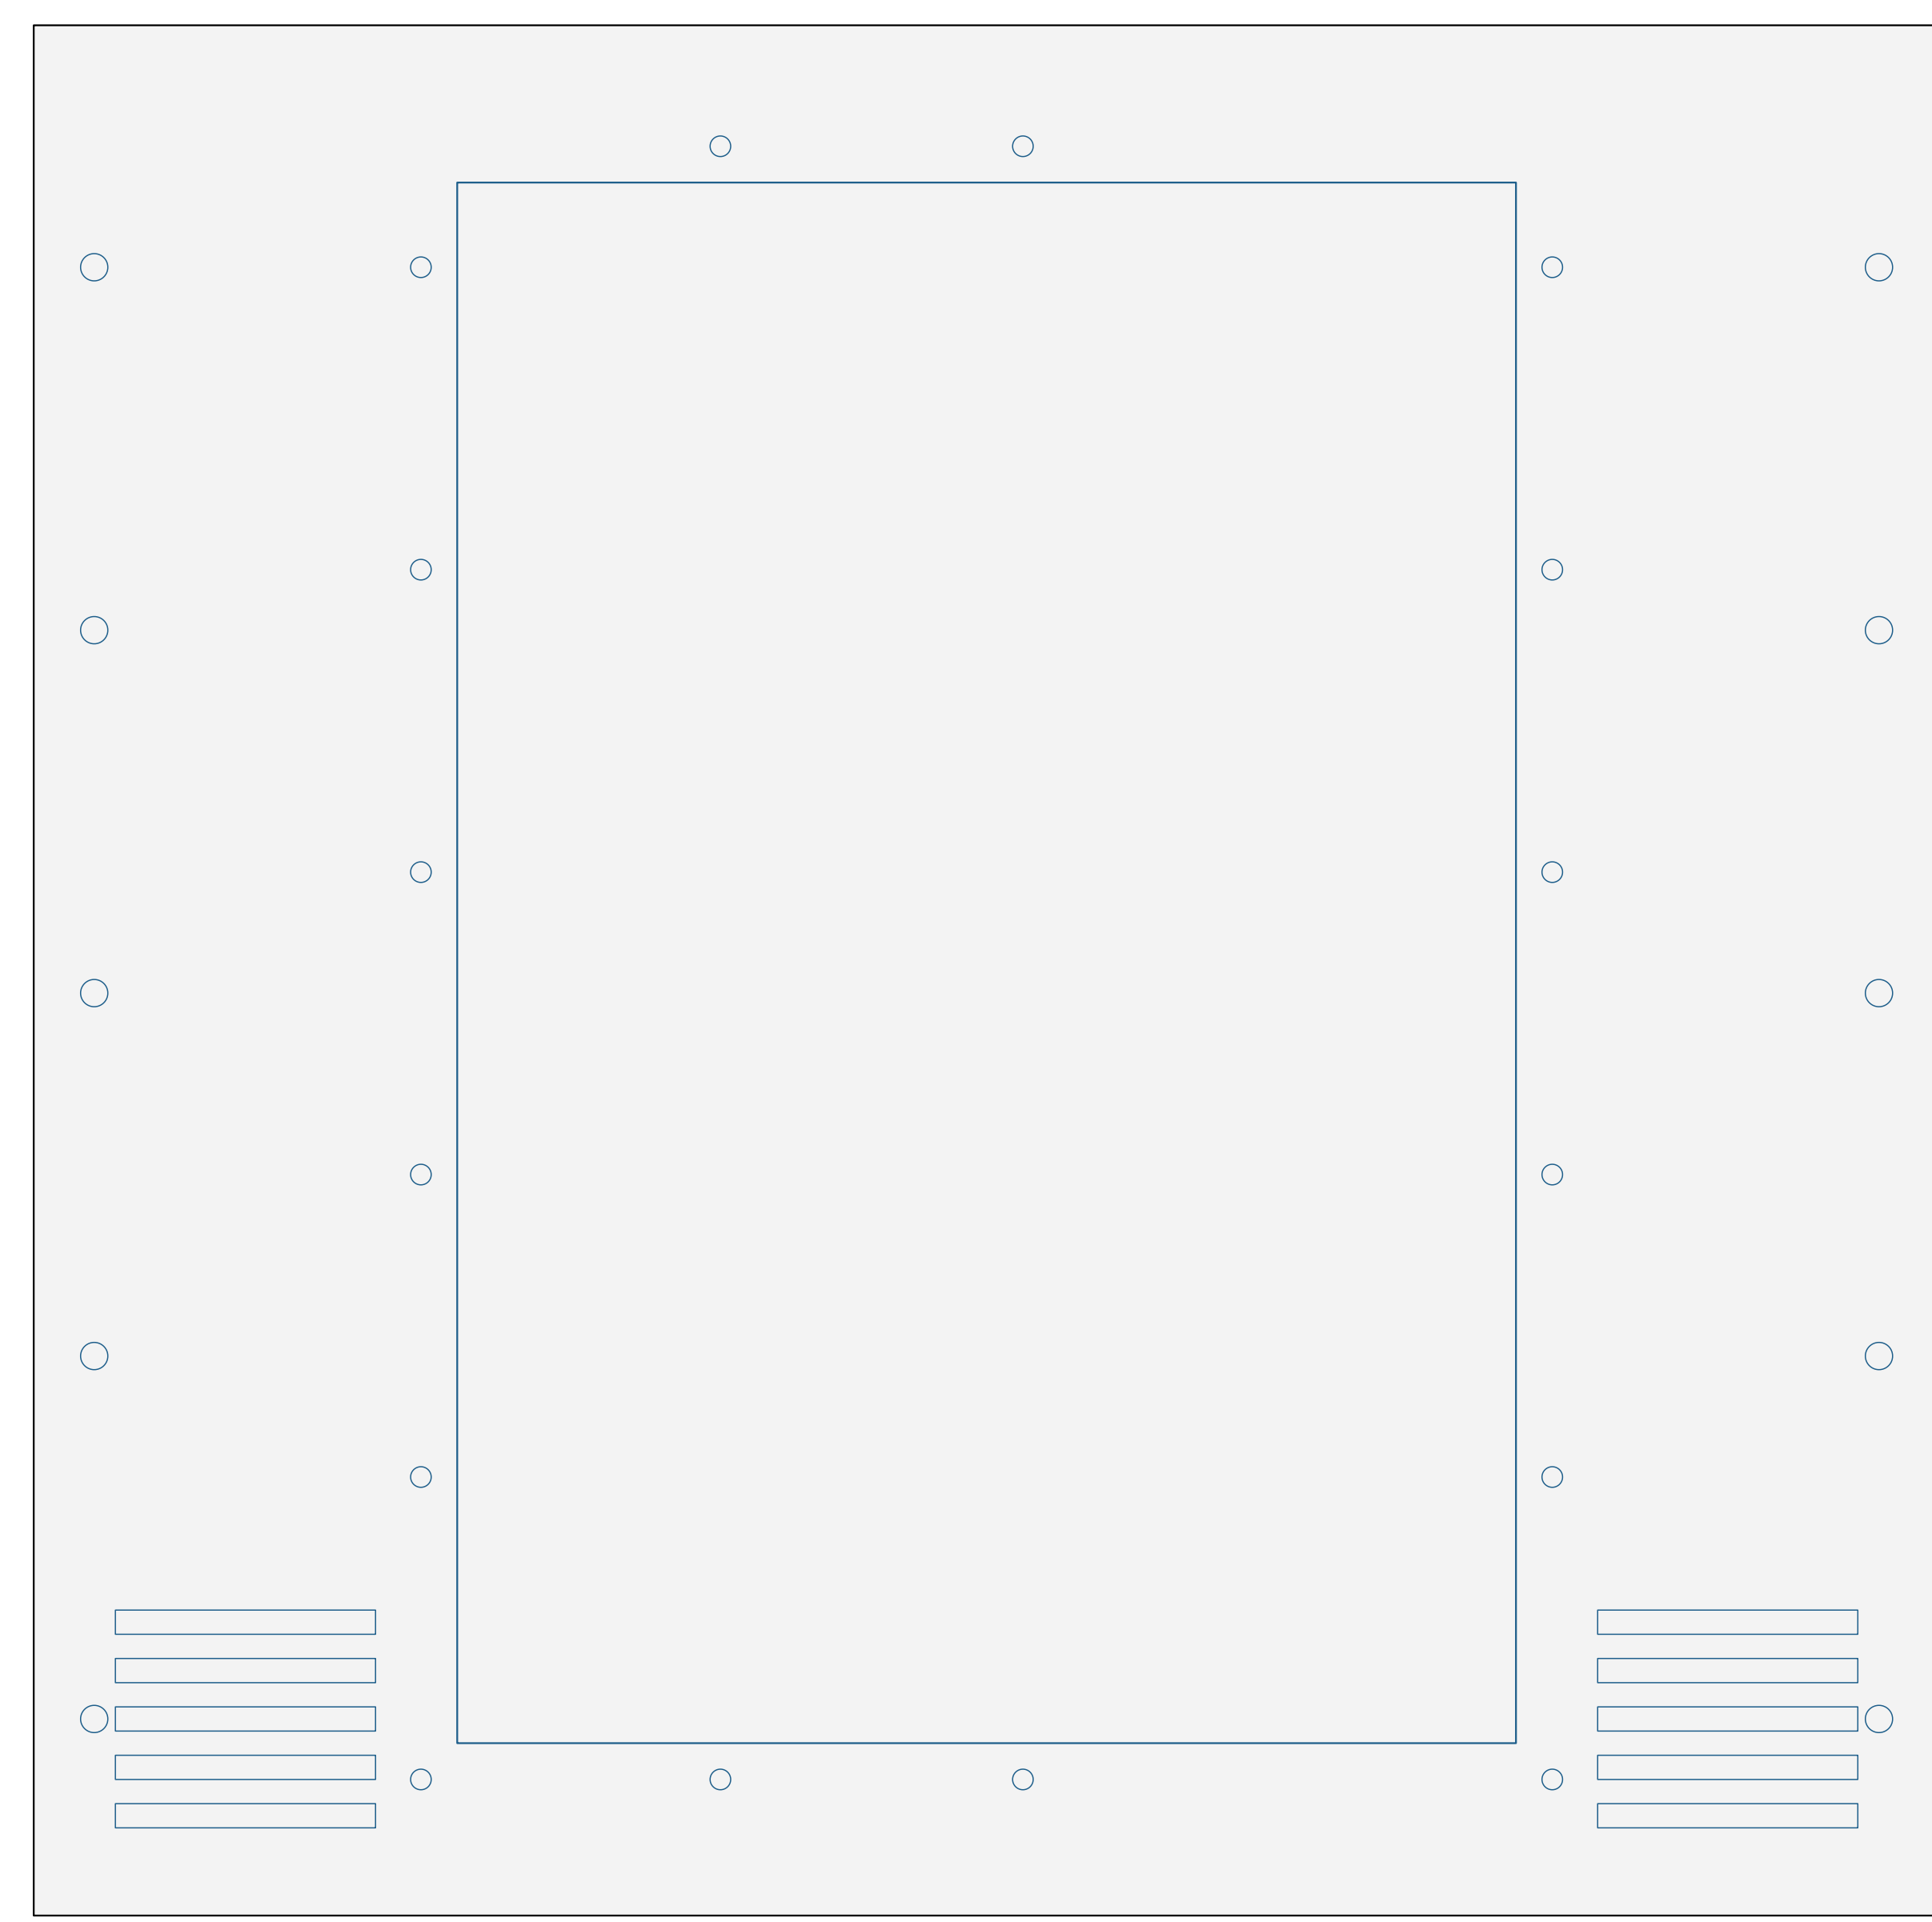


PART 1 — TRAY, flat pattern. AI 5154-H22 t = 2.5 mm; 7 bends 90°, R_in 2.5 mm, BA = 5.50 mm each (K = 0.4); PEM S-M4-1 ×18 in Ø5.4 holes; corner reliefs 2×t to be added in CAM

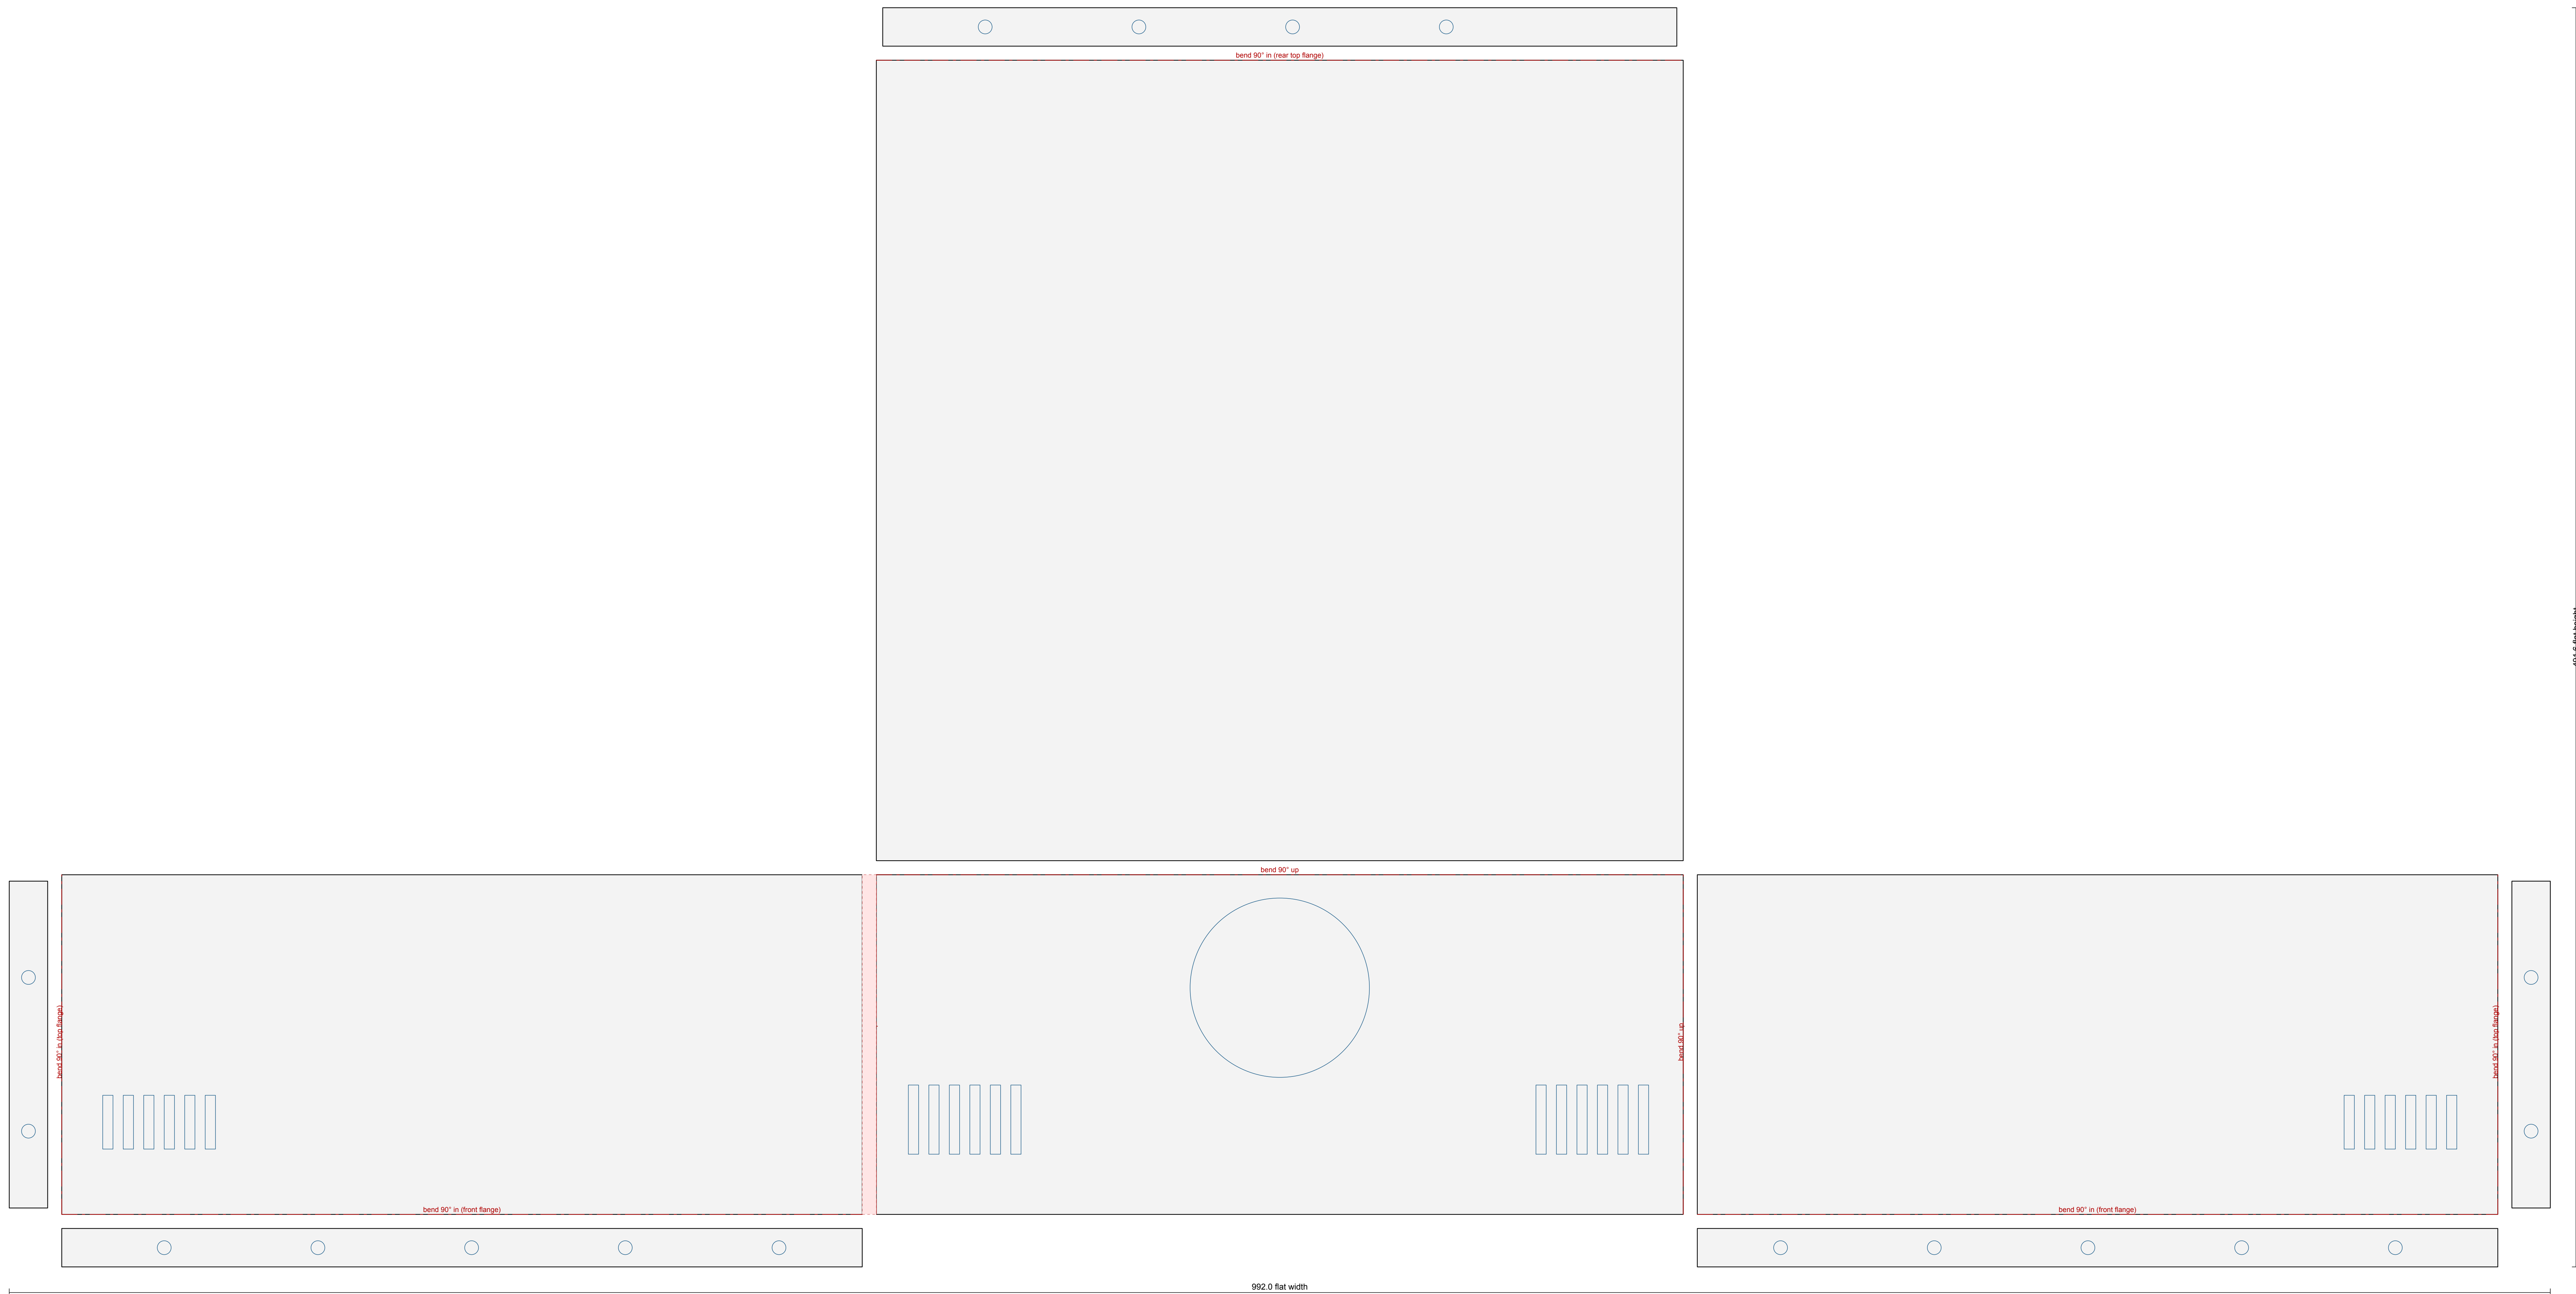

PART 2 — FRONT PLATE, flat (no bends), t = 2.5 mm: window 175×258, M3 clamp holes Ø3.4, M4 holes Ø4.5 to the tray front flanges, intake louvres 2 × 5

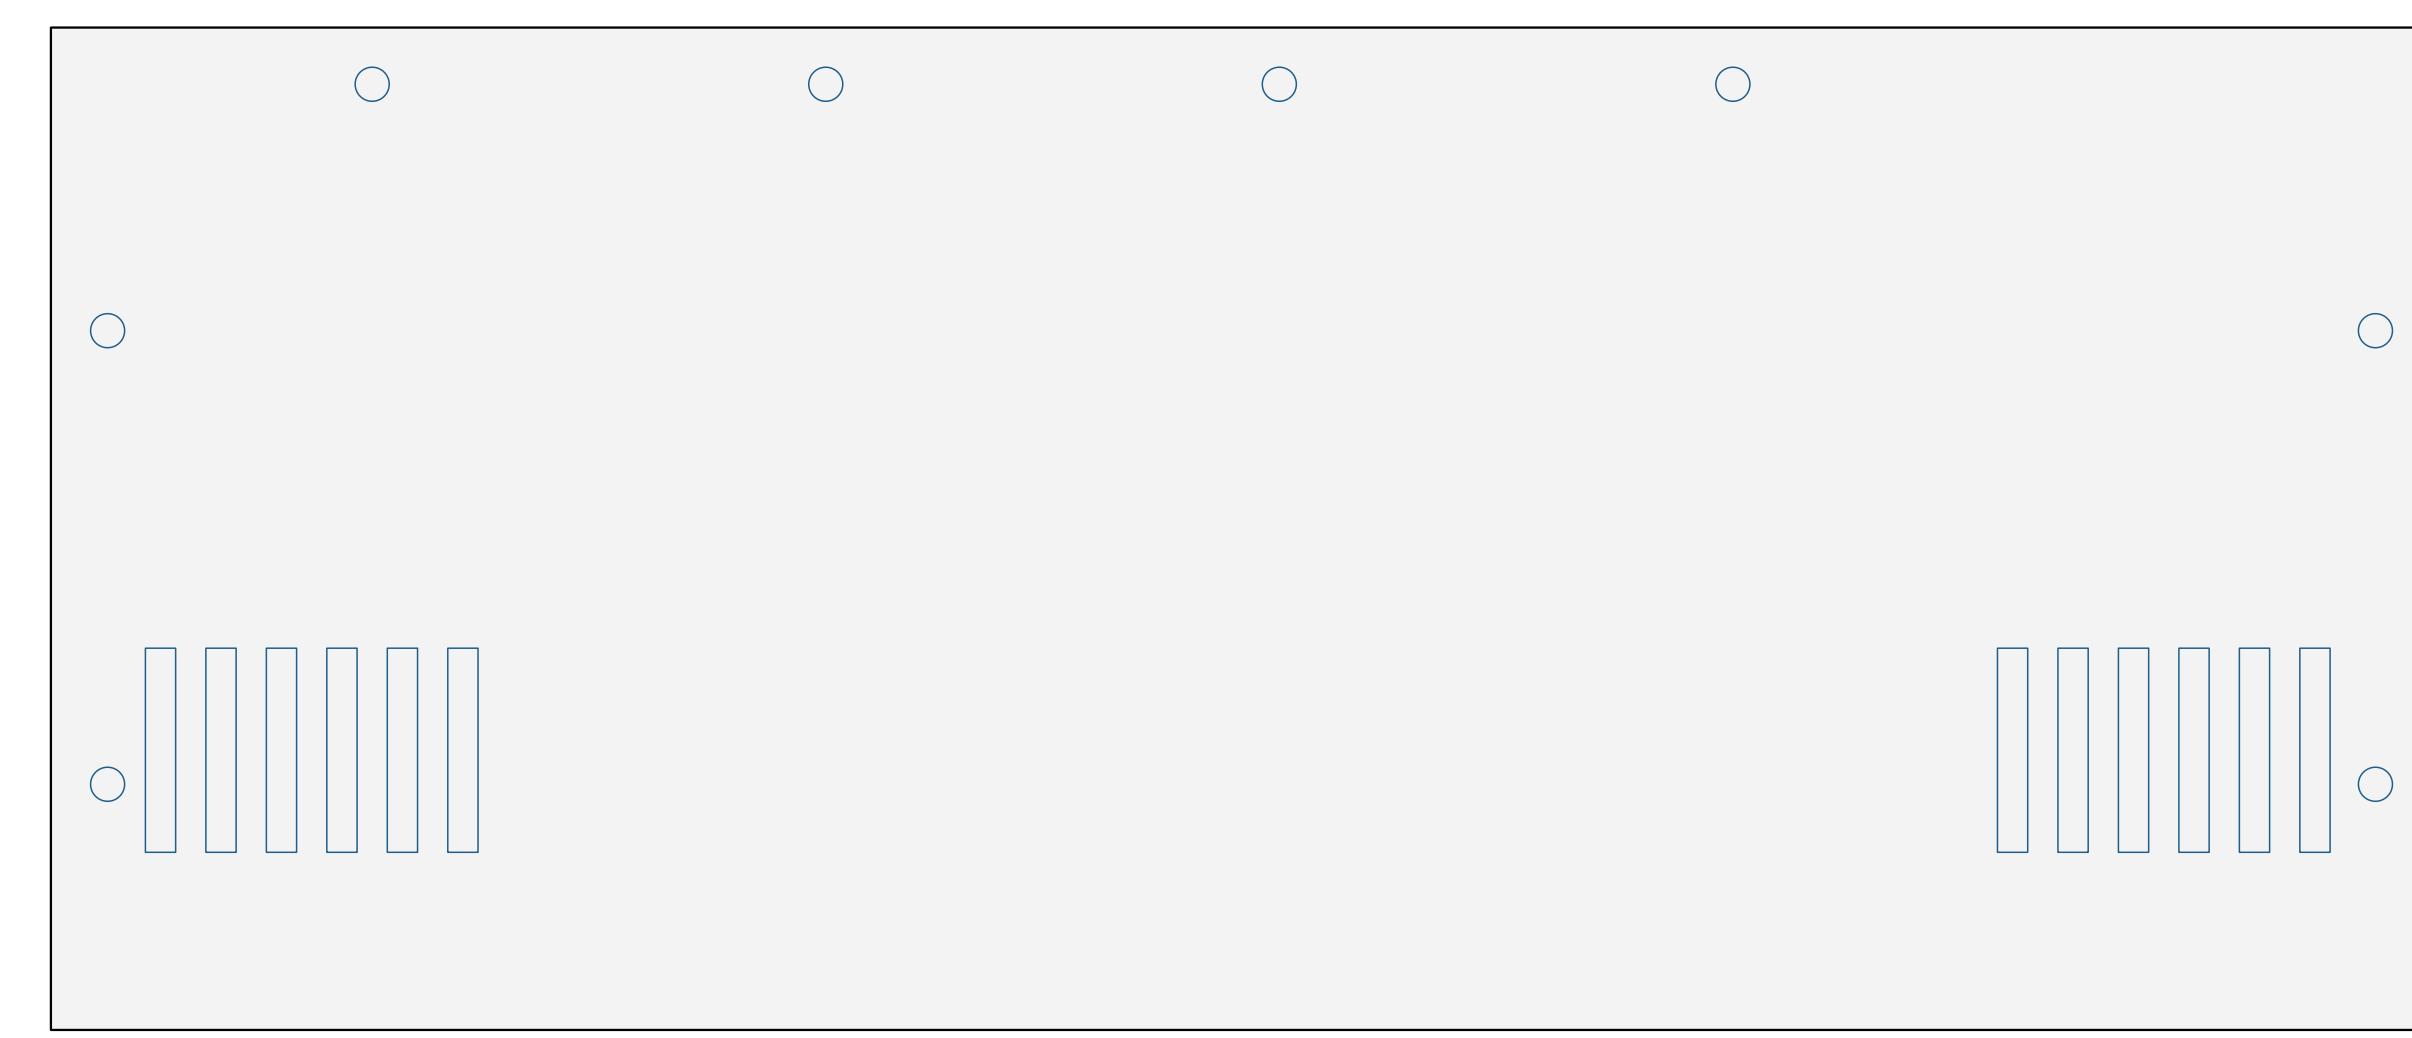

PART 3 — LID, flat, t = 2.5 mm: M4 holes Ø4.5 on the flange pattern, exhaust slots 2 × 6; EPDM gasket 15 × 3 mm under the lid on the flanges

