



SNOWPEAK

S I N C E 1 9 7 6

CATALOGUE

www.snowpeaksports.com
Tel. : +86-575-88758815
Email: sales@snowpeaksports.com

ABOUT US

Snowpeak comes from China. Since 1976 SNOWPEAK has been focusing on the design and manufacture of air guns and related products. The rapid development of China's manufacturing industry has made SNOWPEAK more and more able to meet the needs of shooting hobbies. SNOWPEAK's vision is to create more fun in life and let more people enjoy the passion, exploration, and beauty of life integrated with nature that shooting brings to people's lives.

SNOWPEAK continues to explore and research in the field of shooting equipment, quickly realizes more possibilities that technological development brings to product design, and actively listens to the opinions of our customers, allowing us to better understand the personality and commonality of customers' needs, and continuously tailor for different shooting lovers in different countries and regions with cost-effective products.

SNOWPEAK has its own responsibility to meet customers' needs and creates values for customers. Therefore, we will continue to pay attention to quality details and cost control. Our efforts have also gained the trust of more and more customers, making SNOWPEAK products more popular in more countries.

A person wearing a light-colored hat and sunglasses is looking through binoculars. They are positioned in the center of the frame, with their face partially obscured by the binoculars and the rim of their hat. The background is a dense field of tall, dry, golden-brown grass. The lighting is bright and slightly hazy, creating a sense of depth and focus on the person.

PCP SERIES



M16

CHARACTERISTICS

- ◆ High Shooting Accuracy.
- ◆ Great gas-saving capability with high usage rate.
- ◆ Simple structure, easy handling and good stability.
- ◆ Exquisite workmanship and excellent appearance.
- ◆ Standard quick fill adaptor.
- ◆ Side-lever is easier to operate.

M16A

CHARACTERISTICS

- ◆ Magazine,regulator and silencer are included.
- ◆ Side-lever is easier to operate.
- ◆ Safe and reliable,high shooting accuracy.
- ◆ Tank is removable.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M16	4.5/5.5/6.35	900/800/700fps	13/11/9 SHOTS	1-5Lbf	1-6Lbf	25MPa	HAVE	3.00kg	960*190*55(mm)	2PCS
M16A	4.5/5.5/6.35	900/800/700fps	13/11/9 SHOTS	1-5Lbf	1-6Lbf	25MPa	HAVE	3.10kg	960*190*63(mm)	2PCS



M30

CHARACTERISTICS

- ◆ Air tube and barrel are integrated design.
- ◆ Integrated design is patented.
- ◆ Adjustable regulator and speed adjustable.
- ◆ Magazine included
- ◆ Bolt action.



M30A

CHARACTERISTICS

- ◆ Air tube and barrel are integrated design.
- ◆ Integrated design is patented.
- ◆ Adjustable regulator and speed adjustable.
- ◆ Magazine included.
- ◆ Side-level action.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M30	4.5/5.5/6.35	950/850/750fps	12/10/9 SHOTS	0.5-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.80kg	1145*180*40(mm)	2PCS
M30A	4.5/5.5/6.35	950/850/750fps	12/10/9 SHOTS	0.5-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.80kg	1145*180*40(mm)	2PCS



M11

CHARACTERISTICS

- ◆ High muzzle energy with dozens of effective shots.
- ◆ Integrated suppressor.
- ◆ Smooth cocking bolt handle, with magazine.
- ◆ Optional filler, defaulted consistent valve.
- ◆ Defaulted regulated parts.
- ◆ Two-stage adjustable trigger.

M22

CHARACTERISTICS

- ◆ M11/M22 are basically same.
- ◆ M11 has attached silencer and M22 has shroud silencer.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M11	4.5/5.5/6.3	900/900/ 800fps	13/11/9 SHOTS	two-stage adjustable trigger, 0.5-5Lbf	manual, on/off1-6Lbf	25MPa	HAVE	3.30kg	1170*170*60(mm)	2PCS
M22	5							3.70kg	1240*170*60(mm)	2PCS



M40

CHARACTERISTICS

- ◆ Regulated and semi-auto function.
- ◆ Integrated suppressor.
- ◆ Picatinny rail.
- ◆ Manual safety.
- ◆ Two-stage adjustable trigger.

M50

CHARACTERISTICS

- ◆ Regulated and semi-auto function.
- ◆ Integrated suppressor, manual safety.
- ◆ Picatinny rail and two-stage adjustable trigger.
- ◆ M40,M50 can be exchanged by changing parts.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M40	4.5/5.5/6.35	900/800/700fps	12/10/9 SHOTS	0.5-5Lbf	manual,on/off 1-6Lbf	25MPa	HAVE	3.30kg	810*195*40(mm)	1PC
M50	4.5/5.5/6.35	900/800/700fps	12/10/9 SHOTS	0.5-5Lbf	manual,on/off 1-6Lbf	25MPa	HAVE	3.50kg	1080*172*48(mm)	1PC

**CHARACTERISTICS**

- ◆ Picatinny rail.
- ◆ Bolt-action cocking lever.
- ◆ Two-stage adjustable trigger.
- ◆ Large capacity air tube.
- ◆ Very powerful
- ◆ Manual safety and regulated.

**M25**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35/7.62/ 9.0	900/900/900/850/800fps	12/10/9/8/6 SHOTS	0.5-5Lbf	1-6Lbf	25MPa	HAVE	3.80/4.00kg	1230*185*65(mm)	2PCS



CHARACTERISTICS

- ◆ Integrated suppressor.
- ◆ Picatinny rail.
- ◆ Bullpup wood stock.
- ◆ Two-stage adjustable trigger.
- ◆ Consistent valve included.
- ◆ Magazine included.



P10

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	900/900/800fps	13/11/9 SHOTS	1-5Lbf	on 2-6Lbf/ off 1-5Lbf	25MPa	HAVE	3.50kg	740*200*40(mm)	2PCS



CHARACTERISTICS

- ◆ High shooting accuracy.
- ◆ Great gas-saving capacity with high usage rate.
- ◆ Integrated suppressor.
- ◆ Simple structure, easy handling and good stability.
- ◆ Standard quick fill adaptor.
- ◆ Extremely light with only 2kg.
- ◆ Side-level is easier to operate.



P15

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	900/800/700fps	11/9/8 SHOTS	1-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.40kg	675*200*40(mm)	2PCS



CHARACTERISTICS

- ◆ High shooting accuracy.
- ◆ Great gas-saving capacity with high usage rate.
- ◆ With suppressor.
- ◆ Standard quick fill adaptor.
- ◆ Single shot.



P18

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	900/800/700fps	Single Shot	1-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	3.80kg	865*175*68(mm)	2PCS



CHARACTERISTICS

- ◆ Bull-pup.
- ◆ Side-lever is positioned near the grip.
- ◆ Extremely light.
- ◆ Two-stage adjustable trigger.



P35

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	900/800/700fps	11/9/8 SHOTS	1-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.40kg	675*200*40(mm)	2PCS

**CHARACTERISTICS**

- ◆ Entry level match pcp pistol.
- ◆ Regulated
- ◆ Match trigger, fully adjustable.
- ◆ Match grip for perfect fit.

**PP20**

CALIBER	SPEED	SAFETY	TRIGGER PULL	BARREL LENGTH	L.W.H.	STOCK	WEIGHT	PACKING
4.5	8J	Auto	0.1-2Lbf	240mm	425*145*60(mm)	Beech	1.1kg	10PCS

**CHARACTERISTICS**

- ◆ Capable velocity of 700 fps.
- ◆ Portable PCP pistol, only 370mm overall length.
- ◆ 12mm dovetail rail, optional
- ◆ Two-stage adjustable trigger.
- ◆ Consistent valve included.
- ◆ Magazine included.

**PP700S-A**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/800/700fps	Single Shot	1-5Lbf	/	25MPa	HAVE	0.89kg	365*145*35(mm)	10PCS

**CHARACTERISTICS**

- ◆ Adjustable back butt and adjustable trigger.
- ◆ Without Silencer.
- ◆ Side level is easy to operate.
- ◆ 12mm dovetail rail.
- ◆ Consistent valve and magazine are included.

**PP750**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5	680/550fps	9/7 SHOTS	0-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	1.50kg	388*155*32(mm)	10PCS

**CHARACTERISTICS**

- ◆ Pistol pcp.
- ◆ With magazine.
- ◆ Life over 5000 times

**PP800**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5	800/700fps	9/7 SHOTS	0.5-4Lbf	manual,on/off 1-6Lbf	20MPa	Have	0.6kg	380*50*170(mm)	10PCS



PR900W

CHARACTERISTICS

- ◆ Capable velocity of over 900 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single shot and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.

PR900W-GEN2

CHARACTERISTICS

- ◆ Capable velocity of over 900 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
PR900W	4.5/5.5	900/700fps	9/7 SHOTS	0.5-4Lbf	manual, 1-6Lbf	20MPa	NONE	2.27kg	950*55*200(mm)	4PCS
PR900W GEN-2	4.5/5.5	900/800fps	9/7 SHOTS	0.5-4Lbf	manual, 1-6Lbf	20MPa	HAVE	2.27kg	950*55*200(mm)	4PCS



CHARACTERISTICS

- ◆ Simulation pistol.
- ◆ Pump action and single shot.
- ◆ Shooting mode manual & single shot.
- ◆ No safety and front sight no fiber.
- ◆ Rear sight adjustable up&down and right&left.
- ◆ Life over 5000 times.



LP400

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY	BARREL LENGTH	FRONT SIGHT	WEIGHT	L.W.H.	PACKING
4.5/5.5	270/200fps	Single Shot	0.5-5Lbf	N/A	165mm	HAVE	0.70kg	235*35*145(mm)	20PCS



CHARACTERISTICS

- ◆ Capable velocity of 800 fps.
- ◆ Both capable of single and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.
- ◆ Portable and light percompressed.



LR700W

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	BARREL LENGTH	STOCK	WEIGHT	L.W.H.	PACKING
4.5/5.5	800/700fps	9/7 SHOTS	0.5-4Lbf	manual, 1-6Lbf	567mm	European beech	2.60kg	980*55*200(mm)	4PCS



CHARACTERISTICS

- ◆ Entry level match pcp.
- ◆ Single shot.
- ◆ Precision fully regulated.
- ◆ Adjustable match stock for perfect fit.
- ◆ Multi match trigger.



MAT300

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY FORCE	BARREL LENGTH	REGULATED	WEIGHT	L.W.H.	PACKING
4.5	1000fps	PP	0.1-2Lbf	manual, on/off 1-6Lbf	545MM	HAVE	3.3kg	1080*245*67(mm)	2PCS

CO2 SERIES





CHARACTERISTICS

- ◆ Capable velocity of 500 fps with effective shots.
- ◆ Portable CO2 pistol, only 390 mm overall length.
- ◆ Easy to cock and load.
- ◆ Adjustable trigger.
- ◆ Both capable of single shot and multi-shot.



CP1-M

CALIBER	SPEED	MAGAZINE	trigger pull	SAFETY	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	500/400fps	9/7 SHOTS	0.5-4Lbf	/	12g CO2 bottle	210mm	0.888kg	390*48*146(mm)	16PCS



CP2

CHARACTERISTICS

- ◆ Capable velocity of 600 fps.
 - ◆ Portable CO₂ pistol only 360mm overall length.
 - ◆ Easy to cock and load, trigger is adjustable.
 - ◆ Capable of single and multi-shot.
 - ◆ Manual safety, metal front sight with split silencer.



CP2 CAMO

CHARACTERISTICS

- ◆ CP2 and CP2 CAMO are almost same.
 - ◆ CP2 has black stock, while CP2 CAMO has camo resin stock.



CHARACTERISTICS

- ◆ Sport CO2 pistol.
- ◆ Magazine included.
- ◆ With manual safety.
- ◆ Life over 5000 times.



CP400

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5	300fps	8 SHOTS	3-13Lbf	1-6Lbf	12g CO2 bottle	170mm	0.60kg	250*32*150(mm)	20PCS



CHARACTERISTICS

- ◆ Capable velocity of over 650 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single shot and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.



CR600W

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	600/500fps	9/7 SHOTS	0.5-4Lbf	ON/OFF 1-6Lbf	12g CO2 bottle	480mm	2.10kg	950*55*200(mm)	4PCS

SPRING AIR GUN





CHARACTERISTICS

- ◆ Precision rifled steel barrel.
- ◆ Light cocking design, manual safety.
- ◆ Metal trigger blade.
- ◆ Micro adjustable rear-sight for windage&elevation.
- ◆ Rubber butt pad for recoil absorption.
- ◆ Fiber optic sights with contrasting fiber colors.

AN500

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	LIFE	WEIGHT	L.W.H.	PACKING
4.5/5.5	380~490/220fps	PP	4-8.5Lbf	Manual	4-8.5Lbf	3000 times	2.043kg	1000*50*180(mm)	5PCS



B11

CHARACTERISTICS

- ◆ Precision rifled steel barrel.
- ◆ Polimer trigger blade.
- ◆ Automatic safety, changeable front sights.
- ◆ Grooved cylinder for scope& mounted scope stop.
- ◆ Anti bear-trap cocking safety.



B11P

CHARACTERISTICS

- ◆ B11 and B11P are almost same.
- ◆ B11 has beech stock, while B11P has PP stock.

MODEL	CALIBER	SPEED	STOCK	trigger pull	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
B11	4.5/5.5	900/750fps	wood	4-8.5Lbf	Auto	1-6Lbf	480mm	3.817kg	1200*220*50(mm)	5PCS
B11P	4.5/5.5	900/750fps	pp	4-8.5Lbf	Auto	1-6Lbf	480mm	3.817kg	1200*220*50(mm)	5PCS

**CHARACTERISTICS**

- ◆ Break barrel pistol.
- ◆ Zinc piston and zinc chamber.
- ◆ Manual safety.

**SP500**

CALIBER	SPEED	STOCK	trigger pull	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5	400fps	pp	3-8.5Lbf	N/A	1-6Lbf	220mm	0.914kg	374*31*150(mm)	10PCS



CHARACTERISTICS

- ◆ Side-level cocking spring air gun.
- ◆ With magazine.
- ◆ Two-stage adjustable trigger.
- ◆ Removable silencer.
- ◆ Stock adjustable for length.



SR900S

CALIBER	SPEED	MAGAZINE	SAFETY	SAFETY FORCE	TRIGGER PULL	STOCK	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/800fps	9/7 SHOTS	Manual	1-6Lbf	0.5-4Lbf	German Beech	2.27kg	950*55*200(mm)	2PCS



SR1000S

CHARACTERISTICS

- ◆ High shooting accuracy & high velocity.
- ◆ Steady power and long life time.
- ◆ Less breaking force.
- ◆ Manual safety, adjustable trigger pull.
- ◆ The front sight is integrated with suppressor.

SR1000S/Camo

CHARACTERISTICS

- ◆ SR1000S and SR1000s/Camo are almost same.
- ◆ SR1000S has PP stock, while SR1000S/Camo has Camo PP stock.

CALIBER	SPEED	SAFETY	BARREL LENGTH	SAFETY FORCE	trigger pull	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/750fps	Manual	450mm	1-5Lbf	1-6Lbf	3.6kg	1290*180*70(mm)	2PCS



SR1000W

CHARACTERISTICS

- ◆ High shooting accuracy & high velocity.
- ◆ Steady power and long life time.
- ◆ Less breaking force.
- ◆ Manual safety, adjustable trigger pull.
- ◆ The front sight is integrated with suppressor.



SR1000X

CHARACTERISTICS

- ◆ Break barrel with magazine, automatic loading.
- ◆ Manual safety.

MODEL	CALIBER	SPEED	STOCK	SAFETY	SAFETY FORCE	TRIGGER PULL	BARREL	WEIGHT	L.W.H.	PACKING
SR1000W	4.5/5.5	900/750fps	Wood	Manual	1-5Lbf	1-6Lbf	450mm	3.6kg	1290*180*70(mm)	2PCS
SR1000X	4.5/5.5	1000/800fps	PP	Manual	1-5Lbf	2PCS/CTN	439mm	3.8kg	1265*45*212(mm)	2PCS



SR1250S

CHARACTERISTICS

- ◆ High shooting accuracy & high velocity.
- ◆ High usage rate and good stability.
- ◆ Less breaking force, auto-safety and bear trap.
- ◆ Checking piece is adjustable.
- ◆ The pp stock is sniper style and equipped with bipod.



SR1250S/Camo

CHARACTERISTICS

- ◆ Camo color is also available.

CALIBER	SPEED	STOCK	trigger pull	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/750fps	pp	4-8.5Lbf	Auto	on/off 1-6Lbf	480mm	4.40kg	1265*160*60(mm)	2PCS



CHARACTERISTICS

- ◆ High shooting accuracy&high velocity.
- ◆ High usage rate and good stability.
- ◆ Less breaking force.
- ◆ Auto safety and bear trap.
- ◆ Gas piston is an option.

SR1250W

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/750fps	wood	4-8.5Lbf	Auto	on/off 1-6Lbf	480mm	3.70kg	1180*200*60(mm)	2PCS

**CHARACTERISTICS**

- ◆ High shooting accuracy&high velocity.
- ◆ Steady power and long lifetime.
- ◆ Less breaking force.
- ◆ Manual safety.
- ◆ Two-stage adjustable trigger.

**SR1400F**

CALIBER	SPEED	STOCK	trigger pull	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	900/750fps	pp	4-8.5Lbf	Manual	on/off 1-6Lbf	480mm	3.70kg	1175*50*22(mm)	2PCS



CHARACTERISTICS

- ◆ Fastest break barrel rifle worldwide.
- ◆ Detectable aluminum alloy suppressor.
- ◆ Picatinny dovetail rail.
- ◆ Use gas piston as its power source.
- ◆ Automatic safety.
- ◆ Two-stage adjustable trigger.



GR1600W

CALIBER	SPEED	SAFETY	STOCK	trigger pull	PACKING	BARREL	WEIGHT	L.W.H.
4.5/5.5/6.35	1300/1000/650fps	Auto	European beech	4-8.5Lbf	2PCS/CTN	430mm	3.8kg	1250*46*130(mm)

A blurry, warm-toned photograph of a person wearing a light-colored cap and a dog standing in a field of tall, dry grass. The scene is out of focus, creating a soft, golden background.

ACCESSORIES



ROUND /4.5mm



ROUND HEAVY /4.5mm



ROUND /5.5mm



ROUND /6.35mm



HOLLOW POINT /4.5mm



HOLLOW POINT /5.5mm



**LEAD
PELLET**

MODEL	CALIBER	WEIGHT	QTY/TIN	QTY/CTN	CTN SIZE(MM)
Round Pellets	4.5mm	0.54g/8.33gr	500pcs	50tin	352*147*126
	4.5mm(heavy)	0.67g/10.34gr	500pcs	50tin	352*147*126
	5.5mm	1.03g/15.9gr	250pcs	50tin	352*147*126
Hollow Point Pellets	6.35mm	1.68g/25.93gr	150pcs	50tin	352*147*126
	4.5mm	0.57g/8.8gr	500pcs	50tin	352*147*126
	5.5mm	1.03g/15.9gr	250pcs	50tin	352*147*126



POINTED /4.5mm



POINTED /5.5mm




ACCURATE HEAVY /5.5mm



WADCUTTER /4.5mm



WADCUTTER /5.5mm



**LEAD
PELLET**

MODEL	CALIBER	WEIGHT	QTY/TIN	QTY/CTN	CTN SIZE(MM)
Pointed Pellets	4.5mm	0.48g/7.41gr	500pcs	50tin	352*147*126
	5.5mm	0.9g/13.89gr	250pcs	50tin	352*147*126
Accuracy Heavy Pellets	5.5mm	1.36g/20.99gr	250pcs	50tin	352*147*126
Wadcutter Pellets	4.5mm	0.53g/8.18gr	500pcs	50tin	352*147*126
	5.5mm	1g/15.43gr	250pcs	50tin	352*147*126

30E**CHARACTERISTICS**

- ◆ Small, exquisite and simple.
- ◆ Stable.
- ◆ Have filter function for input and output air.

SPECIFICATION

- ◆ **PUMP WAY** Hand pump
- ◆ **PEDAL TYPE** Unfoldable feet plate
- ◆ **WORK PRESSURE** 30MPa
- ◆ **OUTPUT THREAD** M10*1.0
- ◆ **FUNCTION TEST** Pump 400-500 times to reach 20MPa for a 0.35L tank
- ◆ **DURABILITY** Continuous work for 2h under 15 MPa.
- ◆ **LENGTH** Close 590mm/Open 1090mm
- ◆ **WEIGHT** 2.2kg

K30-2



CHARACTERISTICS

- ◆ Setting autostop value.
- ◆ Inner moisture filter.
- ◆ Three-type safety device(adjustable gauge,safety valve,burst disc).
- ◆ Rotating joint, arbitrary adjustment of inflating angle.
- ◆ Beautiful and convenient wire spool.

SPECIFICATION

- ◆ **POWER** 250W
- ◆ **WEIGHT** 5KGS
- ◆ **AIR OUTPUT** 8L/min
- ◆ **MAX CURRENT** 25A
- ◆ **MOTER SPEED** 2700r/min
- ◆ **NOISE LEVEL** 75DB
- ◆ **VALTAGE** 12V
- ◆ **CHARGING TIME** 0.5L tank(6-7 mins from 200 to 300 bars/18-20 mins from 0 to 300 bars)
- ◆ **SIZE** 240*160*256(mm)



EC300

PUMPS

SPECIFICATION

- ◆ **TYPE** Air cooling,oil lubrication &standard compressor.
- ◆ **WORK PRESSURE** 300Bar
- ◆ **LUBRICATION WAY** SSplash lubrication
- ◆ **INPUT TEMP. REQ.** 50C-450C
- ◆ **FIRST AIR CYLINDER** 38mm/0-6bar
- ◆ **SECOND AIR CYLINDER** 19mm/0-52bar
- ◆ **THIRD AIR CYLINDER** 9mm/0-300bar

**1-6x24IR****SPECIFICATION**

- ◆ Magnification: 1X-6X
- ◆ OBJ.DIA: 24mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 15-4mm Eye Relief: 100-95mm
- ◆ Field of View: 20°6'-3°35'

**1-4X24IR****SPECIFICATION**

- ◆ Magnification: 1X-4X
- ◆ OBJ.DIA: 24mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 17-6mm Eye Relief: 102-96mm
- ◆ Field of View: 20°-5°5'

**2-7X32****SPECIFICATION**

- ◆ Magnification: 2X-7X
- ◆ OBJ.DIA: 32mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 16-4.5mm Eye Relief: 108-98mm
- ◆ Field of View: 8°-2°25'

**3-9X40****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 13.3-4.4mm Eye Relief: 105-96mm
- ◆ Field of View: 6°30'-2°20'

**3-9X40(HQ)**

**4-12X40AO****4-14X44****SPECIFICATION**

- ◆ Magnification: 4X-12X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 10-3.3mm Eye Relief: 102-96mm
- ◆ Field of View : $4^{\circ}50'$ - $1^{\circ}40'$

SPECIFICATION

- ◆ Magnification: 4X-14X
- ◆ OBJ.DIA: 44mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 11-3.1mm Eye Relief: 100-82mm
- ◆ Field of View : $4^{\circ}30'$ - $1^{\circ}30'$

**4-16x50****SPECIFICATION**

- ◆ Magnification: 4X-16X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 12.5-3.13mm Eye Relief: 95-90mm
- ◆ Field of View : $4^{\circ}30'-1^{\circ}15'$

**4-16X42AOE****SPECIFICATION**

- ◆ Magnification: 4X-16X
- ◆ OBJ.DIA: 42mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 10.5-2.6mm Eye Relief: 88-80mm
- ◆ Field of View : $4^{\circ}50'-1^{\circ}15'$

**FF4-14X44****FFP4.5-18X44****SPECIFICATION**

- ◆ Magnification: 4X-14X
- ◆ OBJ.DIA: 44mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 11-3.1mm Eye Relief: 100-82mm
- ◆ Field of View : $4^{\circ}30'-1^{\circ}30'$

SPECIFICATION

- ◆ Magnification: 4.5X-18X
- ◆ OBJ.DIA:44mm TUBE.DIA: 30mm
- ◆ Exit Pupil:9.8-2.4mm Eye Relief: 94-81mm
- ◆ Field of View : $4^{\circ}20'-1^{\circ}5'$

**SF2.5-10X44****SF2.5-10X50IR****SPECIFICATION**

- ◆ Magnification: 2.5X-10X
- ◆ OBJ.DIA: 44mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 17.6-4.4mm Eye Relief: 110-82mm
- ◆ Field of View : $6^{\circ}20'$ - $1^{\circ}50'$

SPECIFICATION

- ◆ Magnification: 2.5X-10X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 20-5mm Eye Relief: 109-80mm
- ◆ Field of View : $6^{\circ}25'$ - $1^{\circ}40'$

**SF3-12X44****SF3-12X40AOE****SPECIFICATION**

- ◆ Magnification: 3X-12X
- ◆ OBJ.DIA: 44mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 14.6-3.6mm Eye Relief: 86-76mm
- ◆ Field of View : $6^{\circ}30'-1^{\circ}50'$

SPECIFICATION

- ◆ Magnification: 3X-12X
- ◆ OBJ.DIA:40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil:13.3-3.3mm Eye Relief: 85-80mm
- ◆ Field of View : $6^{\circ}-1^{\circ}50'$

**6-18X44****SPECIFICATION**

- ◆ Magnification: 6X-18X
- ◆ OBJ.DIA: 44mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 7.3-2.4mm Eye Relief: 102-96mm
- ◆ Field of View : $2^{\circ}54'$ - $1^{\circ}10'$

**SF4-16X44****SPECIFICATION**

- ◆ Magnification: 4X-16X
- ◆ OBJ.DIA:44mm TUBE.DIA: 30mm
- ◆ Exit Pupil:11-2.75mm Eye Relief: 87-80mm
- ◆ Field of View : 5° - $1^{\circ}20'$



SF6-24X50IRG



SF10-40X50IR

SPECIFICATION

- ◆ Magnification: 6X-24X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 30mm
- ◆ Exit Pupil: 8.3-2.1mm Eye Relief: 98-78mm
- ◆ Field of View : $2^{\circ}55'-50'$

SPECIFICATION

- ◆ Magnification: 10X-40X
- ◆ OBJ.DIA:50mm TUBE.DIA: 30mm
- ◆ Exit Pupil:5-1.2mm Eye Relief: 100-85mm
- ◆ Field of View : $2^{\circ}10'-40'$



1X30RD

SPECIFICATION

- ◆ Magnification: 1X
- ◆ OBJ.DIA: 30mm
- ◆ Eye Relief: Parallax free and unlimited.



1X40RD

SPECIFICATION

- ◆ Magnification: 1X
- ◆ OBJ.DIA: 40mm
- ◆ Eye Relief: Parallax free and unlimited.



4x20



4X32



4X32AO

SPECIFICATION

- ◆ Magnification: 4X
- ◆ OBJ.DIA: 20mm TUBE.DIA: 19mm
- ◆ Exit Pupil: 5mm Eye Relief: 75mm
- ◆ Field of View at 100yards: 3.4

SPECIFICATION

- ◆ Magnification: 4X
- ◆ OBJ.DIA: 32mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil:8mm Eye Relief: 80mm
- ◆ Field of View at 100yards: 5.8

**3-9X32****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 32mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 3.56-10.67mm Eye Relief: 85-70mm
- ◆ Field of View at 100yards: 3-7.6

**3-9X40AO****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 4.44-13.3mm Eye Relief: 85-70mm
- ◆ Field of View at 100yards: 2.6-7

**3-9X50AO****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 5.56-16.67mm Eye Relief: 85-75mm
- ◆ Field of View at 100yards: 2.6-6.6

**4-16X40AOE****SPECIFICATION**

- ◆ Magnification: 4X-16X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 3.12-12.5mm Eye Relief: 90-80mm
- ◆ Field of View at 100yards: 1.1-3.6



6-24X50AOE

SPECIFICATION

- ◆ Magnification: 6X-24X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 2.08-8.33mm Eye Relief: 90-80mm
- ◆ Field of View at 100yards: 0.8-2.9



M2004

SPECIFICATION

- ◆ Diameter: 25.4mm
- ◆ Height: 18mm




1404



1405



T10

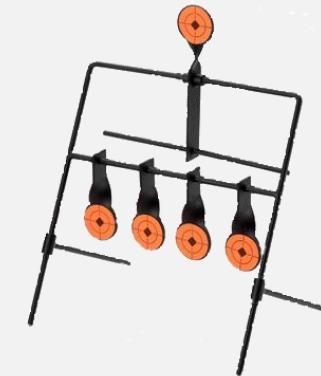

T20

MODEL	WEIGHT QTY/CTN	CTN SIZE(MM)	N.W./G.W.
1404/1405	0.65kgs 50PCS	720*300*220	30/32kgs
T10	0.72kgs 20PCS	400*290*345	15/16kgs
T20	0.85kgs 10PCS	400*290*345	8.5/9.8kgs



SNP-1



SNP-2



SNP-7



SNP-10

MODEL	WEIGHT QTY/CTN	CTN SIZE(MM)	N.W./G.W.
SNP-1	0.50kgs 20PCS	360*320*280	10/11kgs
SNP-2	0.75kgs 20PCS	740*310*400	15/17kgs
SNP-7	2.00kgs 6PCS	530*370*260	12/13kgs
SNP-10	1.40kgs 10PCS	410*270*300	14/15kgs



SNP-6D



SNP-6P



SNP-6G



SNP-6Z



SNP-6-2D



SNP-6-2P



SNP-6-2Z

MODEL	WEIGHT	QTY/CTN	CTN SIZE(MM)	N.W./G.W.
SNP-6(D/G/P/Z)	5kgs	4PCS	550*490*445	21/22kgs
SNP-6-2(D/P/Z)	3.5kgs	4PCS	470*320*445	14/15kgs



slingshot001-1



slingshot001-2



slingshot002



slingshot003



slingshot004

MODEL NO.	PCS/CTN	N.W./G.W.(kg)	HANDLE STOCK	CTN SIZE(mm)	NOTE
slingshot001-1	30	11.10/13.20	PA6+30%GF	470*375*415	laser sight
slingshot001-2	30	11.10/13.20	PA6+30%GF	470*375*415	cross sight
slingshot002	50	6.50/9.00	ABS	570*270*365	/
slingshot003	50	12.00/16.00	ABS	570*340*435	/
slingshot004	30	12.00/16.00	PP	625*375*550	/



GB201



GB1010



GB1005

MODEL	QTY/CTN	PACKAGE SIZE	G.W./N.W.	DESCRIPTION
GB201	20	126*26*56(cm)	11/10kgs	camouflage fabric D Oxford+15mm composite sponge hair clothes
GB1005	50	54*33*40(cm)	12/11kgs	fabric 600D Oxford+15mm Composite sponge hair clothes
GB1010	20	126*35*55(cm)	12/11kgs	camouflage fabric 600D Oxford +30mm corrugated sponge



CK01



CK-76



CK-023



SIZE	N.W.	G.W.	PACKING	CTN SIZE
L	11.0kgs	11.5kgs	30PCS	62*38*24(cm)
XL	11.4kgs	11.9kgs	30PCS	
2XL	11.8kgs	12.3kgs	30PCS	
3XL	12.2kgs	12.7kgs	30PCS	