



***SNOWPEAK***

S I N C E 1 9 7 6

# CATALOGUE

**2022 VERSION**

**[www.snowpeaksports.com](http://www.snowpeaksports.com)**

**Tel. : +86-575-88758815**

**Email: [sales@snowpeaksports.com](mailto:sales@snowpeaksports.com)**

# ABOUT US

Snowpeak comes from China. Since 1976 SNOWPEAK has been focusing on the design and manufacture of air guns and related products. The rapid development of China's manufacturing industry has made SNOWPEAK more and more able to meet the needs of shooting hobbies. SNOWPEAK's vision is to create more fun in life and let more people enjoy the passion, exploration, and beauty of life integrated with nature that shooting brings to people's lives.

SNOWPEAK continues to explore and research in the field of shooting equipment, quickly realizes more possibilities that technological development brings to product design, and actively listens to the opinions of our customers, allowing us to better understand the personality and commonality of customers' needs, and continuously tailor for different shooting lovers in different countries and regions with cost-effective products.

SNOWPEAK has its own responsibility to meet customers' needs and create values for customers. Therefore, we will continue to pay attention to quality details and cost control. Our efforts have also gained the trust of more and more customers, making SNOWPEAK products more popular in more countries.

**PCP SERIES**



**CHARACTERISTICS**

- ◆ Integrated structure of barrel and air tank
- ◆ Wood stock
- ◆ Up to 50 shots per fill
- ◆ Integrated picatinny rail
- ◆ Include magazine and single shot tray
- ◆ Magazine capacity : 12rounds(.177),10rounds (.22) 9rounds(.25)
- ◆ Max fill pressure: 250bar(3600psi)
- ◆ Barrel length:24"
- ◆ Air capacity: 230cc
- ◆ Regulator: Have

**M30B**



CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	N.W.	PRESSURE	PACKING
4.5/5.5/6.35	950/850/750fps	Manual	1-6Lbf	1160*150*60(mm)	2.8kg	25MPA	2PCS/CTN

**SNOWPEAK**

S I N C E 1 9 7 6



**CHARACTERISTICS**

- ◆ Integrated structure of barrel and air tank
- ◆ Synthetic tactical adjustable stock
- ◆ Up to 50 shots per fill
- ◆ Integrated picatinny rail
- ◆ Include magazine and single shot tray
- ◆ Magazine capacity : 12rounds(.177),10rounds (.22) 9rounds(.25)
- ◆ Max fill pressure: 250bar(3600psi)
- ◆ Barrel length:24"
- ◆ Air capacity: 230cc
- ◆ Regulator: Have

**M30C**



CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	N.W.	PRESSURE	PACKING
4.5/5.5/6.35	950/850/750fps	Manual	1-6Lbf	1160*150*60(mm)	2.8kg	25MPA	2PCS/CTN


**SNOWPEAK**

S I N C E 1 9 7 6



**CHARACTERISTICS**

- ◆ Single shot
- ◆ Caliber available for .177 .22 .25
- ◆ Up to 50shots per fill
- ◆ Detachable Silencer
- ◆ Max fill pressure 250bar(3600psi)
- ◆ Barrel length:20"
- ◆ Air capacity 350cc
- ◆ weight 2.9kgs
- ◆ Regulator: Have

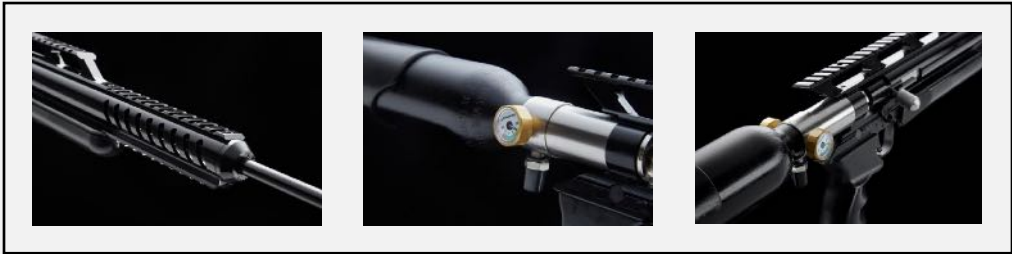

**M18**

CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	STOCK	N.W.	PACKING
4.5/5.5/6.35	1000/900/850fps	Manual	1-6Lbf	1080*175*75(mm)	PP	2.9kg	2PCS/CTN

**SNOWPEAK**

S I N C E 1 9 7 6



## CHARACTERISTICS

- ◆ Adjustable regulator
- ◆ Removable air tank
- ◆ Up to 50shots per fill
- ◆ Detachable Silencer
- ◆ Magazine capacity : 24rounds(.177),20rounds (.22) 18rounds(.25)
- ◆ Air capacity 205cc
- ◆ Two-stage adjustable trigger
- ◆ Max fill pressure 250bar(3600psi)
- ◆ Barrel length:24"
- ◆ Regulator: Have

**M60**



CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	STOCK	N.W.	PACKING
4.5/5.5/6.35	1000/900/850fps	Manual	1-6Lbf	925*185*55(mm)	PP	3.0kg	2PCS/CTN



**CHARACTERISTICS**

- ◆ Entry level match pcp pistol.
- ◆ Regulated
- ◆ Match trigger, fully adjustable.
- ◆ Match grip for perfect fit.



**PP20**

CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	STOCK	WEIGHT	PACKING
4.5	7.5J	/	0.1-2Lbf	420*145*50(mm)	Beech	1.12kg	5PCS




**SNOWPEAK**

S I N C E 1 9 7 6



**CHARACTERISTICS**

- ◆ Entry level match pcp.
- ◆ Single shot.
- ◆ Precision fully regulated.
- ◆ Adjustable match stock for perfect fit.
- ◆ Multi match trigger.



**MAT300**

CALIBER	SPEED	STOCK	TRIGGER PULL	BARREL LENGTH	REGULATED	WEIGHT	L.W.H.	PACKING
4.5	7.5J	Laminate Wood	0.1-2Lbf	570MM	HAVE	3.3kg	1080*50*280(mm)	1PCS



# M16

## CHARACTERISTICS

- ◆ High Shooting Accuracy.
- ◆ Great gas-saving capability with high usage rate.
- ◆ Simple structure, easy handling and good stability.
- ◆ Exquisite workmanship and excellent appearance.
- ◆ Standard quick fill adaptor.
- ◆ Side-lever is easier to operate.

# M16A

## CHARACTERISTICS

- ◆ Magazine,regulator and silencer are included.
- ◆ Side-lever is easier to operate.
- ◆ Safe and reliabe,high shooting accuracy.
- ◆ Tank is removable.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M16	4.5/5.5/6.35	1000/900/800fps	13/11/9 SHOTS	1-5Lbf	1-6Lbf	25MPa	HAVE	3.00kg	960*190*55(mm)	2PCS
M16A	4.5/5.5/6.35	1000/900/800fps	13/11/9 SHOTS	1-5Lbf	1-6Lbf	25MPa	HAVE	3.10kg	960*190*63(mm)	2PCS



## CHARACTERISTICS

- ◆ High muzzle energy with dozens of effective shots.
- ◆ Integrated suppressor.
- ◆ Smooth cocking bolt handle, with magazine.
- ◆ Optional filler, defaulted consistent valve.
- ◆ Defaulted regulated parts.
- ◆ Two-stage adjustable trigger.

**M22**



CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.
4.5/5.5/6.3 5	1000/900 /800fps	13/11/9 SHOTS	two-stage adjustable trigger, 0.5-5Lbf	manual, on/off1-6Lbf	25MPa	HAVE	3.70kg	1240*170*60(mm)



## M40

### CHARACTERISTICS

- ◆ Regulated and semi-auto function.
- ◆ Integrated suppressor.
- ◆ Picatinny rail.
- ◆ Manual safety.
- ◆ Two-stage adjustable trigger.

## M50

### CHARACTERISTICS

- ◆ Regulated and semi-auto function.
- ◆ Integrated suppressor, manual safety.
- ◆ Picatinny rail and two-stage adjustable trigger.
- ◆ M40,M50 can be exchanged by changing parts.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
M40	4.5/5.5/6.35	1000/900/800fps	12/10/9 SHOTS	0.5-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	3.30kg	810*195*40(mm)	1PC
M50	4.5/5.5/6.35	1000/900/800fps	12/10/9 SHOTS	0.5-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	3.50kg	1080*172*48(mm)	1PC



**CHARACTERISTICS**

- ◆ Picatinny rail.
- ◆ Bolt-action cocking lever.
- ◆ Two-stage adjustable trigger.
- ◆ Large capacity air tube.
- ◆ Very powerful
- ◆ Manual safety and regulated.



**M25**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35/7.62/ 9.0	1000/1000/1000/900/80 0fps	12/10/9/8/6 SHOTS	0.5-5Lbf	1-6Lbf	25MPa	HAVE	3.80/4.00kg	1230*185*65(mm)	2PCS



## CHARACTERISTICS

- ◆ Integrated suppressor.
- ◆ Picatinny rail.
- ◆ Bullpup wood stock.
- ◆ Two-stage adjustable trigger.
- ◆ Consistent valve included.
- ◆ Magazine included.



**P10**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATOR	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	1000/1000/900fps	13/11/9 SHOTS	1-5Lbf	on 2-6Lbf/ off 1-5Lbf	25MPa	HAVE	3.75kg	740*200*40(mm)	2PCS



## CHARACTERISTICS

- ◆ High shooting accuracy.
- ◆ Great gas-saving capacity with high usage rate.
- ◆ Integrated suppressor.
- ◆ Simple structure, easy handling and good stability.
- ◆ Standard quick fill adaptor.
- ◆ Extremely light with only 2kg.
- ◆ Side-level is easier to operate.

**P15**



CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATOR	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	1000/900/800fps	11/9/8 SHOTS	1-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.00kg	675*200*40(mm)	2PCS

**SNOWPEAK**

S I N C E 1 9 7 6



## CHARACTERISTICS

- ◆ Bull-pup.
- ◆ Side-lever is positioned near the grip.
- ◆ Extremely light.
- ◆ Two-stage adjustable trigger.



**P35**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5/6.35	1000/900/800fps	11/9/8 SHOTS	1-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	2.40kg	687*190*51(mm)	2PCS



# ***SNOWPEAK***

S I N C E 1 9 7 6



## **CHARACTERISTICS**

- ◆ Capable velocity of 700 fps.
- ◆ Portable PCP pistol, only 370mm overall length.
- ◆ 12mm dovetail rail, optional
- ◆ Two-stage adjustable trigger.
- ◆ Consistent valve included.



# **PP700S-A**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5	700/600fps	Single Shot	1-5Lbf	/	25MPa	HAVE	0.90kg	365*145*35(mm)	10PCS



## CHARACTERISTICS

- ◆ Adjustable back butt and adjustable trigger.
- ◆ Without Silencer.
- ◆ Side level is easy to operate.
- ◆ 12mm dovetail rail.
- ◆ Consistent valve and magazine are included.



**PP750**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATED	WEIGHT	L.W.H.	PACKING
4.5/5.5	750/550fps	9/7 SHOTS	0-5Lbf	manual, on/off 1-6Lbf	25MPa	HAVE	1.47kg	406*157*32(mm)	10PCS



**CHARACTERISTICS**

- ◆ Pistol pcp.
- ◆ With magazine.
- ◆ Life over 5000 times



**PP800**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY FORCE	MAX. PRESSURE	REGULATOR	WEIGHT	L.W.H.	PACKING
4.5/5.5	800/700fps	9/7 SHOTS	0.5-4Lbf	manual,on/off 1-6Lbf	20MPa	Have	1.00kg	520*50*170(mm)	10PCS



## PR900S-GEN2

### CHARACTERISTICS

- ◆ Capable velocity of over 900 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single shot and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.



## PR900W-GEN2

### CHARACTERISTICS

- ◆ Capable velocity of over 900 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	MAX. PRESSURE	REGULATED	L.W.H.	PACKING
PR900S-GEN2	4.5/5.5	900/800fps	9/7 SHOTS	0.5-4Lbf	20MPa	HAVE	950*55*200(mm)	4PCS
PR900WGEN-2	4.5/5.5	900/800fps	9/7 SHOTS	0.5-4Lbf	20MPa	HAVE	950*55*200(mm)	4PCS



## CHARACTERISTICS

- ◆ Simulation pistol.
- ◆ Pump action and single shot.
- ◆ Shooting mode manual & single shot.
- ◆ No safety and front sight no fiber.
- ◆ Rear sight adjustable up&down and right&left.
- ◆ Life over 5000 times.



**LP400**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY	BARREL LENGTH	FRONT SIGHT	WEIGHT	L.W.H.	PACKING
4.5/5.5	270/200fps	Single Shot	0.5-5Lbf	N/A	165mm	HAVE	0.70kg	235*35*145(mm)	20PCS

A faint, grayscale background image of a person wearing a hard hat and safety glasses, possibly a welder or industrial worker, is visible behind the text.

# **CO2 SERIES**



## CHARACTERISTICS

- ◆ Capable velocity of 500 fps with effective shots.
- ◆ Portable CO2 pistol, only 390 mm overall length.
- ◆ Easy to cock and load.
- ◆ Adjustable trigger.
- ◆ Both capable of single shot and multi-shot.



**CP1-M**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	SAFETY	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	550/500fps	9/7 SHOTS	1-6Lbf	/	12g CO2 bottle	210mm	0.92kg	390*48*146(mm)	16PCS



## CP2

### CHARACTERISTICS

- ◆ Capable velocity of 600 fps.
- ◆ Portable CO2 pistol only 360mm overall length.
- ◆ Easy to cock and load, trigger is adjustable.
- ◆ Capable of single and multi-shot.
- ◆ Manual safety, metal front sight with split silencer.

## CP2 CAMO

### CHARACTERISTICS

- ◆ CP2 and CP2 CAMO are almost same.
- ◆ CP2 has black stock, while CP2 CAMO has camo rasin stock.

MODEL	CALIBER	SPEED	MAGAZINE	TRIGGER PULL	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
CP2	4.5/5.5	550/500fps(pistol)	9/7/single shot	1-6Lbf	12g CO2 bottle	208mm(pistol)4	0.93kg	370*180*45(mm)	8PCS
CP2 CAMO		650/550fps(rifle)				50mm(rifle)	1.50kg	870*185*45(mm)	8PCS



**SNOWPEAK**

S I N C E 1 9 7 6



## CHARACTERISTICS

- ◆ Sport CO2 pistol.
- ◆ Magazine included.
- ◆ With manual safety.
- ◆ Life over 5000 times.



**CP400**

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5	350fps	8 SHOTS	3-9Lbf	12g CO2 bottle	168mm	0.60kg	250*32*150(mm)	20PCS



## CHARACTERISTICS

- ◆ Capable velocity of over 650 fps.
- ◆ Metal front sight with silencing effect.
- ◆ Both capable of single shot and multi-shot.
- ◆ Adjustable trigger.
- ◆ Manual safety.



# CR600W

CALIBER	SPEED	MAGAZINE	TRIGGER PULL	AIR CAPACITY	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	650/550fps	9/7 SHOTS	1-6Lbf	12g CO2 bottle	480mm	2.10kg	950*55*200(mm)	4PCS



**SPRING AIR GUN**



**CHARACTERISTICS**

- ◆ Break barrel & rifled barrel
- ◆ Auto safety with bear trap.
- ◆ Velocity 4.5 over 900pfs and 5.5 over 720fps
- ◆ Light trigger force
- ◆ Fiber optic sights



**SR1200S**

CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	ACTION	N.W.	PACKING
4.5/5.5	900/720fps	Automatic	2-5Lbf	1150*190*47(mm)	Break Barrel	3.0kg	5PCS/CTN



**CHARACTERISTICS**

- ◆ Underlever & rifles barrel
- ◆ Auto safety with bear trap
- ◆ Velocity 4.5 over 900pfs and 5.5 over 720fps
- ◆ Light trigger force
- ◆ Fiber optic sights



**SU1200S**

CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	ACTION	N.W.	PACKING
4.5/5.5	900/720fps	Automatic	2-5Lbf	1170*190*47(mm)	Under Barrel	3.2kg	5PCS/CTN



**CHARACTERISTICS**

- ◆ 12x Auto-indexing Rapid Magazine
- ◆ Both Capable for Ordinarily Spring or Gas-piston
- ◆ Less Cocking Force
- ◆ Manual safety , adjustable trigger pull
- ◆ Integrated with suppressor



**SR1000X**

CALIBER	SPEED	SAFETY	TRIGGER	L.W.H.	ACTION	N.W.	PACKING
4.5/5.5	900/700fps	Manual	two stage adjustable	1225*230*50(mm)	Break Barrel	3.65kg	2PCS/CTN



## CHARACTERISTICS

- ◆ 12x Auto-indexing Rapid Magazine
- ◆ Both Capable for Ordinarily Spring or Gas-piston
- ◆ Less Cocking Force
- ◆ Auto safety , adjustable trigger pull
- ◆ Integrated with suppressor

# SR1250X



CALIBER	SPEED	SAFETY	TRIGGER PULL	L.W.H.	ACTION	N.W.	PACKING
4.5/5.5	880/700fps	Automatic	3-8.5Lbf	1210*225*55(mm)	Break Barrel	3.7kg	2PCS/CTN



## CHARACTERISTICS

- ◆ Precision rifled steel barrel.
- ◆ Light cocking design, manual safety.
- ◆ Metal trigger blade.
- ◆ Micro adjustable rear-sight for windage&elevation.
- ◆ Rubber butt pad for recoil absorption.
- ◆ Fiber optic sights with contrasting fiber colors.



# AN500

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	LIFE	WEIGHT	L.W.H.	PACKING
4.5/5.5	420/350fps	PP	4-8.5Lbf	Manual	4-8.5Lbf	3000 times	2.043kg	1000*50*180(mm)	5PCS





# B11

## CHARACTERISTICS

- ◆ Precision rifled steel barrel.
- ◆ Polimer trigger blade.
- ◆ Automatic safety, changeable front sights.
- ◆ Grooved cylinder for scope& mounted scope stop.
- ◆ Anti bear-trap cocking safety.



# B11P

## CHARACTERISTICS

- ◆ B11 and B11P are almost same.
- ◆ B11 has beech stock, while B11P has PP stock.

MODEL	CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
B11	4.5/5.5	1000/800fps	wood	4-8.5Lbf	Auto	1-6Lbf	480mm	3.817kg	1200*220*50(mm)	5PCS
B11P	4.5/5.5	1000/800fps	pp	4-8.5Lbf	Auto	1-6Lbf	480mm	3.817kg	1200*220*50(mm)	5PCS

**SNOWPEAK**

S I N C E 1 9 7 6



## CHARACTERISTICS

- ◆ Break barrel pistol.
- ◆ Zinc piston and zinc chamber.
- ◆ Manual safety.



**SP500**

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	450/350fps	pp	3-8.5Lbf	Manual	1-6Lbf	220mm	0.914kg	374*150*31(mm)	10PCS



## **SR1000S/Camo**

### **CHARACTERISTICS**

- ◆ High shooting accuracy & high velocity.
- ◆ Steady power and long life time.
- ◆ Less cocking force.
- ◆ Manual safety, adjustable trigger pull.
- ◆ The front sight is integrated with suppressor.

## **SR1000W**

### **CHARACTERISTICS**

- ◆ SR1000W and SR1000s/Camo are almost same.
- ◆ SR1000W has wood stock, while SR1000S/Camo has PP/Camo stock.

MODEL	CALIBER	SPEED	SAFETY	BARREL LENGTH	SAFETY FORCE	TRIGGER PULL	WEIGHT	L.W.H.	PACKING
SR1000S	4.5/5.5	1000/800fps	Manual	450mm	1-5Lbf	3-8.5Lbf	3.6kg	1290*180*70(mm)	2PCS



## SR1250S

### CHARACTERISTICS

- ◆ High shooting accuracy & high velocity.
- ◆ High usage rate and good stability.
- ◆ Less cocking force, auto-safety and bear trap.
- ◆ Checking piece is adjustable.
- ◆ The pp stock is sniper style and equipped with bipod.



## SR1250S/Camo

### CHARACTERISTICS

- ◆ Camo color is also available.

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	1000/800fps	pp	3-8.5Lbf	Auto	on/off 1-6Lbf	485mm	3.65kg	1265*160*60(mm)	2PCS

**SNOWPEAK**

S I N C E 1 9 7 6



## CHARACTERISTICS

- ◆ High shooting accuracy&high velocity.
- ◆ High usage rate and good stability.
- ◆ Less cocking force.
- ◆ Auto safety and bear trap.
- ◆ Gas piston is an option.



# SR1250W

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	1000/800fps	European beech	3-8.5Lbf	Auto	on/off 1-6Lbf	400mm	3.70kg	1180*200*60(mm)	2PCS



## CHARACTERISTICS

- ◆ High shooting accuracy&high velocity.
- ◆ Steady power and long lifetime.
- ◆ Less cocking force.
- ◆ Manual safety.
- ◆ Two-stage adjustable trigger.



# SR1400F

CALIBER	SPEED	STOCK	TRIGGER PULL	SAFETY	SAFETY FORCE	BARREL	WEIGHT	L.W.H.	PACKING
4.5/5.5	1000/800fps	PP	3-8.5Lbf	Manual	on/off 1-6Lbf	450mm	3.60kg	1290*180*70(mm)	2PCS

# ***SNOWPEAK***

S I N C E 1 9 7 6



## **CHARACTERISTICS**

- ◆ Fastest break barrel rifle worldwide.
- ◆ Detectable aluminum alloy suppressor.
- ◆ Picatinny dovetail rail.
- ◆ Use gas piston as its power source.
- ◆ Automatic safety.
- ◆ Two-stage adjustable trigger.



# **GR1600W**

CALIBER	SPEED	SAFETY	STOCK	TRIGGER PULL	PACKING	BARREL	WEIGHT	L.W.H.
4.5/5.5/6.35	1300/1000/800fps	Auto	European beech	3-8.5Lbf	2PCS/CTN	430mm	3.8kg	1180*130*46(mm)



# **ACCESSORIES**



# SNOWPEAK

S I N C E 1 9 7 6



**WADCUTTER**



**ROUND**



**ROUND  
HEAVY**



**ACCURATE  
HEAVY**




**POINTED**



**HOLLOW  
POINTED**



**MAX  
HEAVY**



CALIBER	TYPE	WEIGHT	QTY/TIN	QTY/CTN	CTN SIZE(MM)
4.5MM	WADCUTTER	0.49g/7.56gr	500pcs	50tin	356*147*121
	ROUND	0.55g/8.49gr	500pcs	50tin	
	ROUND HEAVY	0.67g/10.34gr	500pcs	50tin	
	ACCURATE HEAVY	0.7g/10.8gr	500pcs	50tin	
	POINTED	0.49g/7.56gr	500pcs	50tin	
	HOLLOW POINTED	0.56g/8.64gr	500pcs	50tin	
	MAX HEAVY	0.86g/13.27gr	250pcs	50tin	

# SNOWPEAK

S I N C E 1 9 7 6



WADCUTTER



ROUND




ACCURATE  
HEAVY



POINTED



HOLLOW  
POINTED



CALIBER	TYPE	WEIGHT	QTY/TIN	QTY/CTN	CTN SIZE(MM)
5.5MM	WADCUTTER	0.91g/14.04gr	250/500pcs	50/30tin	356*147*121
	ROUND	1.01g/15.59gr	250/500pcs	50/30tin	
	ACCURATE HEAVY	1.38g/21.3gr	250pcs	50tin	
	POINTED	1.05g/16.2gr	250/500pcs	50/30tin	
	HOLLOW POINTED	1.02g/15.74gr	250/500pcs	50/30tin	



ROUND  
6.35MM



ACCURATE  
HEAVY 6.35MM




ROUND  
7.62MM



ROUND  
HEAVY 7.62MM



ROUND  
9MM

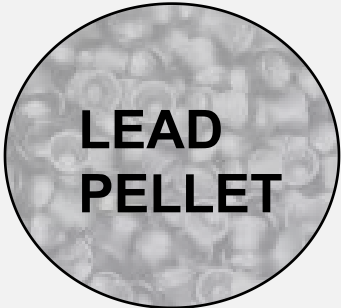

CALIBER	TYPE	WEIGHT	QTY/TIN	QTY/CTN	CTN SIZE(MM)
6.35MM	ROUND	1.65g/25.46gr	150/350pcs	50/30tin	356*147*121
	ACCURATE ROUND	2.1g/32.41gr	150pcs	50tin	
7.62MM	ROUND	2.96g/45.68gr	150pcs	30tin	
	ROUND HEAVY	3.27g/50.46gr	150pcs	30tin	
9MM	ROUND	5.24g/80.87gr	100pcs	30tin	

# 30E



### CHARACTERISTICS

- ◆ Small, exquisite and simple.
- ◆ Stable.
- ◆ Have filter function for input and output air.

### SPECIFICATION

- ◆ **PUMP WAY** Hand pump
- ◆ **PEDAL TYPE** Unfoldable feet plate
- ◆ **WORK PRESSURE** 30MPa
- ◆ **OUTPUT THREAD** M10\*1.0
- ◆ **FUNCTION TEST** Pump 400-500 times to reach 20MPa for a 0.35L tank
- ◆ **DURABILITY** Continuous work for 2h under 15 MPa.
- ◆ **LENGTH** Close 590mm/Open 1090mm
- ◆ **WEIGHT** 2.2kg

# K30-3

NEW



### CHARACTERISTICS

- ◆ Accurate Automatic Shutdown Control
- ◆ Long Service Life
- ◆ AC&DC, Voltage all-in-one machine can be controlled through a change-over switch.
- ◆ Easy to use and carry

### SPECIFICATION

- |                 |   |
|-----------------|---|
| ◆ POWER         | 250W  |
| ◆ WEIGHT        | 6.924KGS  |
| ◆ AIR OUTPUT    | 9L/min  |
| ◆ MAX CURRENT   | 25A   |
| ◆ MOTER SPEED   | 2700r/min   |
| ◆ NOISE LEVEL   | 78DB  |
| ◆ VALTAGE       | AC 220V or 110V or DC12V-15V  |
| ◆ CHARGING TIME | 0.5L ( 7-8 mins from 200 to 300 bars<br>/20-22 mins from 0 to 300 bars) |
| ◆ SIZE          | 228*267*155(mm)   |



### K30-2



#### CHARACTERISTICS

- ◆ Setting autostop value.
- ◆ Inner moisture filter.
- ◆ Three-type safety device(adjustable gauge,safety valve,burst disc).
- ◆ Rotating joint, arbitrary adjustment of inflating angle.
- ◆ Beautiful and convenient wire spool.

#### SPECIFICATION

- |                 |   |
|-----------------|---|
| ◆ POWER         | 250W  |
| ◆ WEIGHT        | 5KGS  |
| ◆ AIR OUTPUT    | 8L/min  |
| ◆ MAX CURRENT   | 25A   |
| ◆ MOTER SPEED   | 2700r/min   |
| ◆ NOISE LEVEL   | 75DB  |
| ◆ VALTAGE       | 12V   |
| ◆ CHARGING TIME | 0.5L tank( 6-7 mins from 200 to 300 bars/18-20 mins from 0 to 300 bars) |
| ◆ SIZE          | 240*160*256(mm)   |

# EC300

PUMPS

### SPECIFICATION

- ◆ **TYPE** Air cooling,oil lubrication &standard compressor.
- ◆ **WORK PRESSURE** 300Bar
- ◆ **LUBRICATION WAY** SSplash lubrication
- ◆ **INPUT TEMP. REQ.** 50C-450C
- ◆ **FIRST AIR CYLINDER** 38mm/0-6bar
- ◆ **SECOND AIR CYLINDER** 19mm/0-52bar
- ◆ **THIRD AIR CYLINDER** 9mm/0-300bar



**4x20****SPECIFICATION**

- ◆ Magnification: 4X
- ◆ OBJ.DIA: 20mm TUBE.DIA: 19mm
- ◆ Exit Pupil: 5mm Eye Relief: 75mm
- ◆ Field of View at 100yards: 3.4

**4X32****SPECIFICATION**

- ◆ Magnification: 4X
- ◆ OBJ.DIA: 32mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 8mm Eye Relief: 80mm
- ◆ Field of View at 100yards: 5.8

**4X32AO**



**3-9X32****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 32mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 3.56-10.67mm Eye Relief: 85-70mm
- ◆ Field of View at 100yards: 3-7.6

**3-9X40AO****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 4.44-13.3mm Eye Relief: 85-70mm
- ◆ Field of View at 100yards: 2.6-7

**3-9X50AO****SPECIFICATION**

- ◆ Magnification: 3X-9X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 5.56-16.67mm Eye Relief: 85-75mm
- ◆ Field of View at 100yards: 2.6-6.6

**4-16X40AOE****SPECIFICATION**

- ◆ Magnification: 4X-16X
- ◆ OBJ.DIA: 40mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 3.12-12.5mm Eye Relief: 90-80mm
- ◆ Field of View at 100yards: 1.1-3.6

**6-24X50AOE****SPECIFICATION**


- ◆ Magnification: 6X-24X
- ◆ OBJ.DIA: 50mm TUBE.DIA: 25.4mm
- ◆ Exit Pupil: 2.08-8.33mm Eye Relief: 90-80mm
- ◆ Field of View at 100yards: 0.8-2.9

**M2004****SPECIFICATION**

- ◆ Diameter: 25.4mm
- ◆ Height: 18mm



1404




1405



1406

MODEL	WEIGHT	QTY/CTN	CTN SIZE(MM)	N.W.	G.W.
1404/1405/ 1406	0.6KG	24PCS	310*300*290	14.4KG	15KG

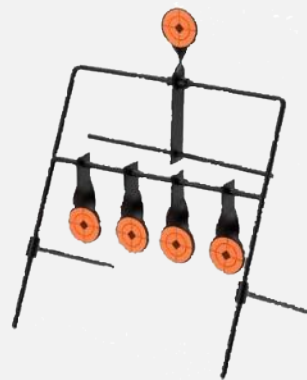**T10****T20**

MODEL	WEIGHT	QTY/CTN	CTN SIZE(MM)	N.W.	G.W.
<b>T10</b>	0.72KG	20PCS	400*290*345	15.0KG	16.0KG
<b>T20</b>	0.85KG	10PCS	400*290*345	8.5KG	9.8KG



SNP-1



SNP-2



SNP-7



SNP-10

MODEL	WEIGHT	QTY/CTN	CTN SIZE(MM)	N.W./G.W.
SNP-1	0.50kgs	20PCS	360*320*280	10/11kgs
SNP-2	0.75kgs	20PCS	740*310*400	15/17kgs
SNP-7	2.00kgs	6PCS	530*370*260	12/13kgs
SNP-10	1.40kgs	10PCS	410*270*300	14/15kgs



SNP-6D



SNP-6P



SNP-6Z



SNP-6-2D



SNP-6-2P



SNP-6-2Z

MODEL	WEIGHT	QTY/CTN	CTN SIZE(MM)	N.W./G.W.
SNP-6(D//P/Z)	5kgs	4PCS	550*490*445	21/22kgs
SNP-6-2(D/P/Z)	3.5kgs	4PCS	470*320*445	14/15kgs



slingshot001-1



slingshot001-2



slingshot002



slingshot003



slingshot004

MODEL NO.	PCS/CTN	N.W./G.W.(kg)	HANDLE STOCK	CTN SIZE(mm)	NOTE
slingshot001-1	30	11.10/13.20	PA6+30%GF	470*375*415	laser sight
slingshot001-2	30	11.10/13.20	PA6+30%GF	470*375*415	cross sight
slingshot002	50	6.50/9.00	ABS	570*270*380	/
slingshot003	50	12.00/16.00	ABS	570*340*435	/
slingshot004	30	12.00/16.00	PP	625*375*550	/



# SNOWPEAK

SINCE 1976

## GUN BAG

NEW



GB01



GB02



GB03

MODEL	DESCRIPTION	L.W.H.
GB01	Polyester 900D Oxford Fabric, 210D PVC Fabric, 1000D with waterproof PU coating, high desnity XPE foam lining	280*750*55
GB02		300*990*55
GB03		260*1200*45



CK01



CK-76



CK-023



SIZE	N.W.	G.W.	PACKING	CTN SIZE
L	11.0kgs	11.5kgs	30PCS	62*38*24(cm)
XL	11.4kgs	11.9kgs	30PCS	
2XL	11.8kgs	12.3kgs	30PCS	
3XL	12.2kgs	12.7kgs	30PCS	