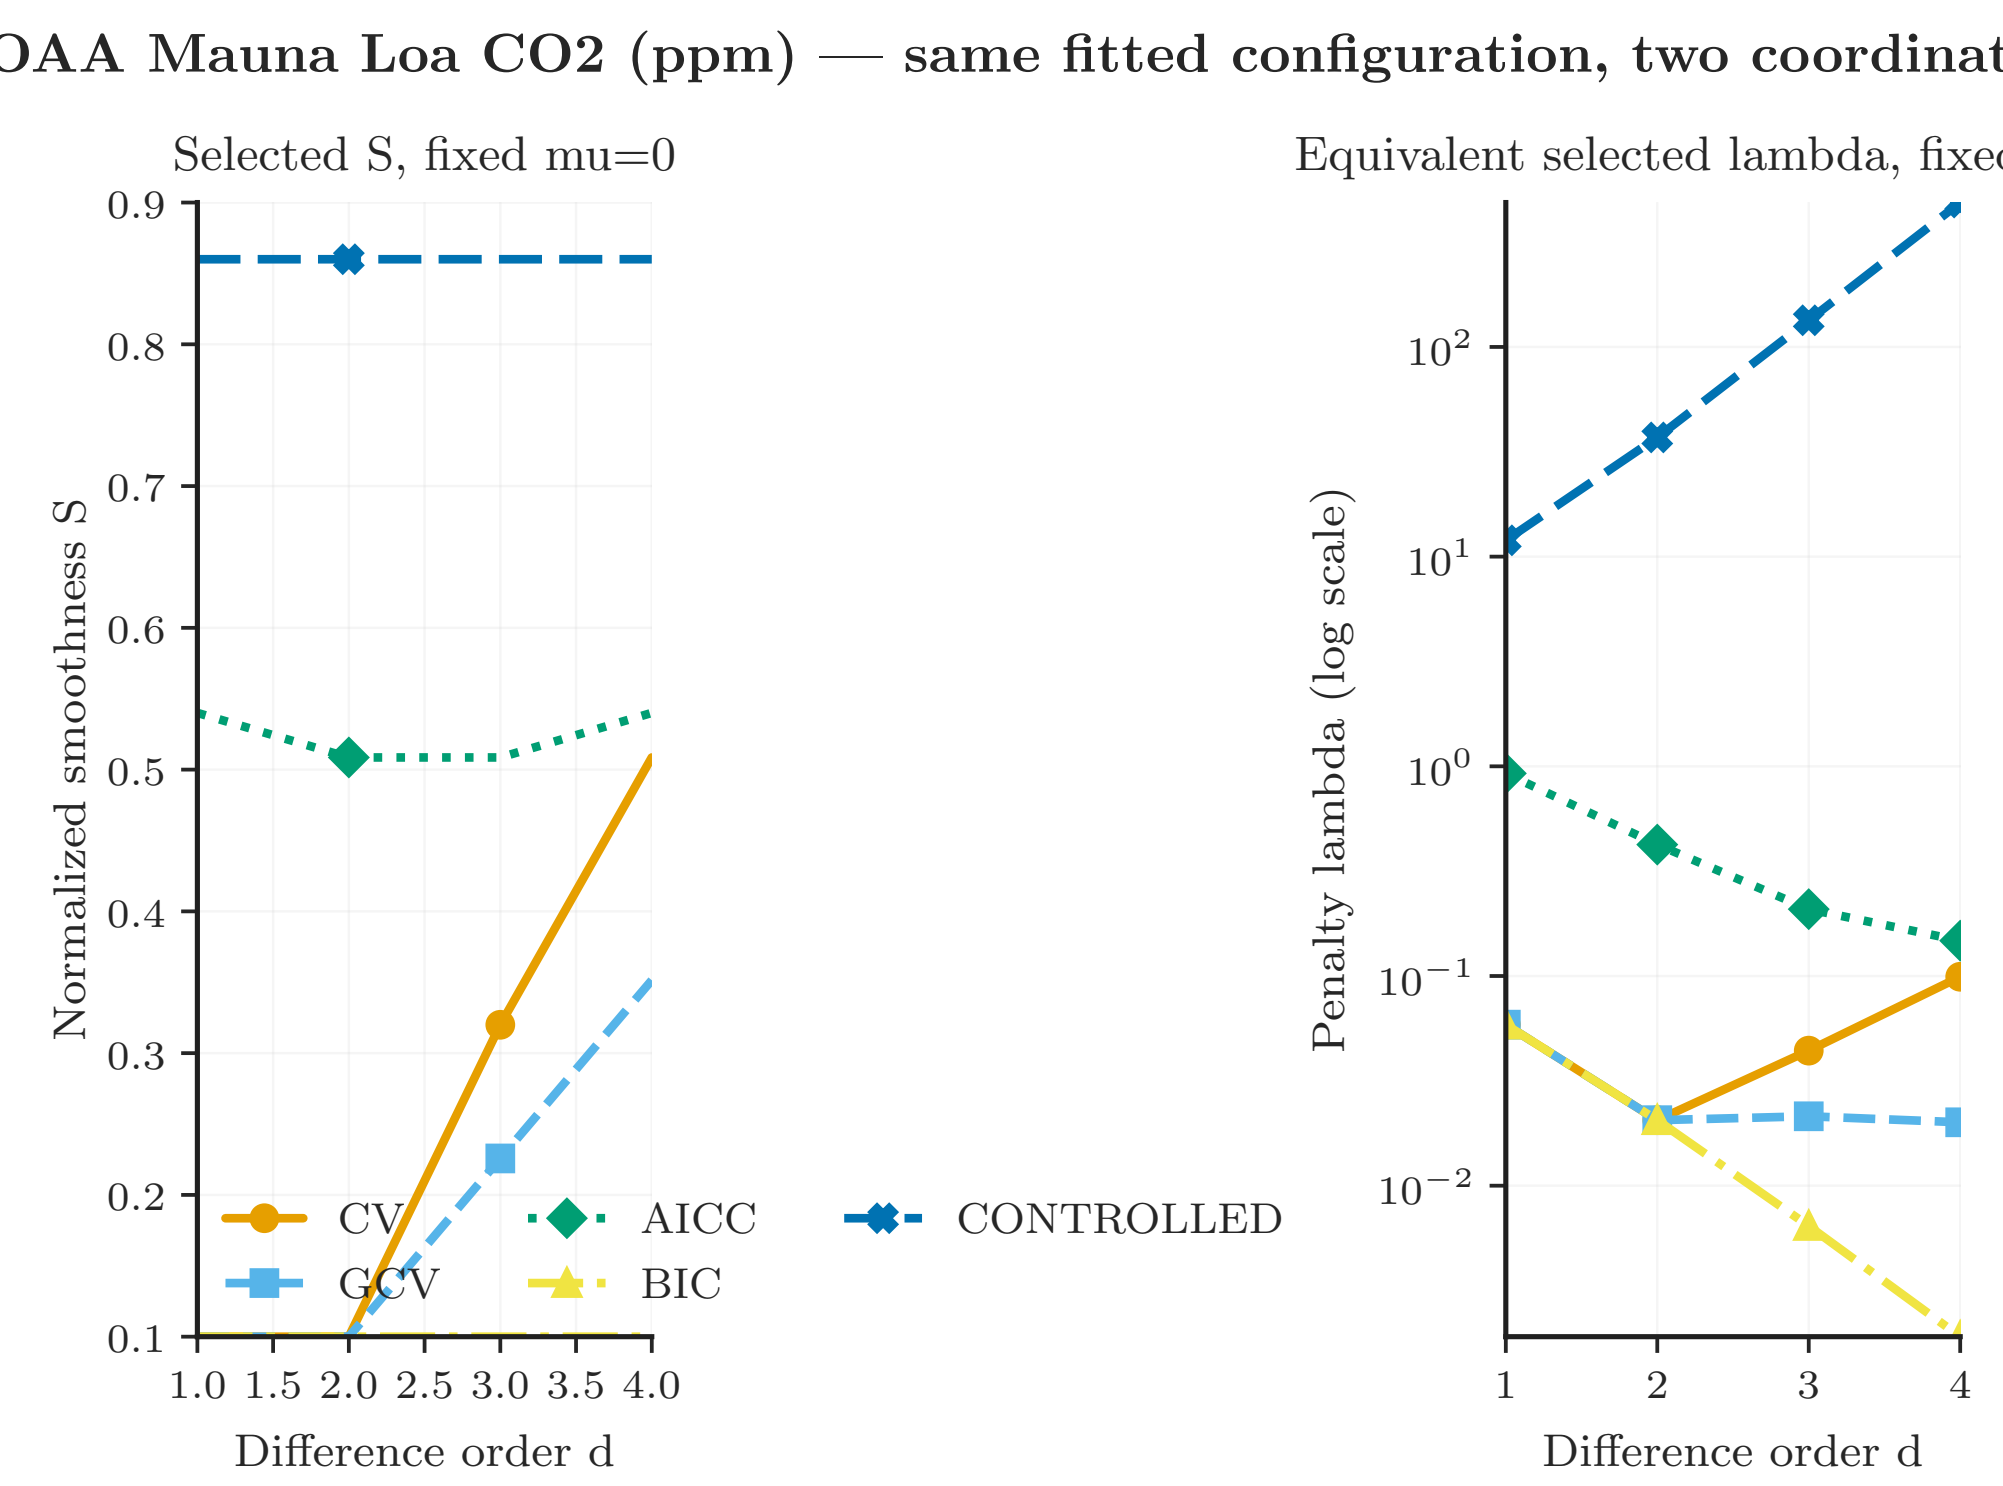

OAA Mauna Loa CO2 (ppm) — same fitted configuration, two coordinat
Selected S, fixed mu=0
Normalized smoothness S
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
1.0 1.5 2.0 2.5 3.0 3.5 4.0
Difference order d
CV
GCV
AICC
BIC
CONTROLLED
Equivalent selected lambda, fixed
Penalty lambda (log scale)
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
1 2 3 4
Difference order d