




Power Input

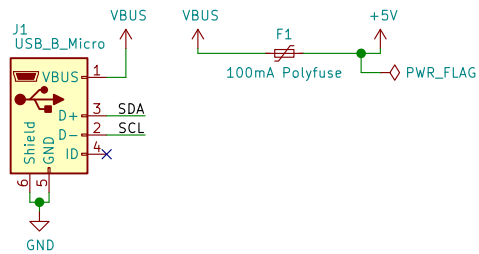


3V3A LDO

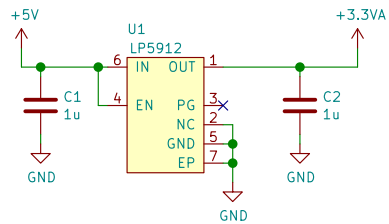


Voltage Rail LEDs



RF Switch

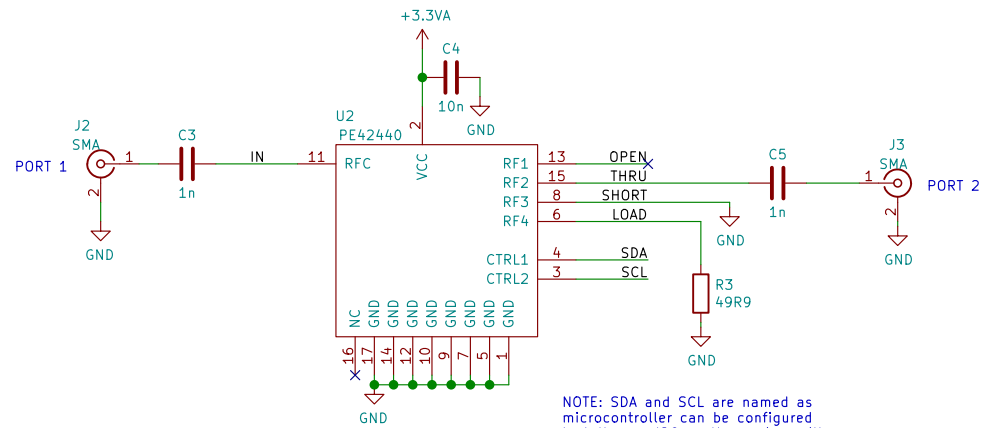

NOTE: SDA and SCL are named as microcontroller can be configured to talk over I2C on these pins, will however be configured as GPIO as only two pins required.



Josh Johnson

Sheet: /
File: Ecal.sch

Title: VNA Ecal

Size: A4 Date: 2019-06-18

KiCad E.D.A. eeschema (5.1.2)-1

Rev: 0

Id: 1/1