



SC energy vs quality — DiT-XL/2, halve, cfg 1.5, w8a8, ImageNet-256 (n=2000) | $E = L/128$ ($E_{sc} = 2E_{int}$ at int8)

intrn = best of {sym, asym} pure-quant (no SC); drawn at $E = (n/8)^2$ (quad, filled ■) and $E = n/8$ (lin, open □). int collapses below 7-bit.

KID vs energy (↓ better, $\times 10^3$)

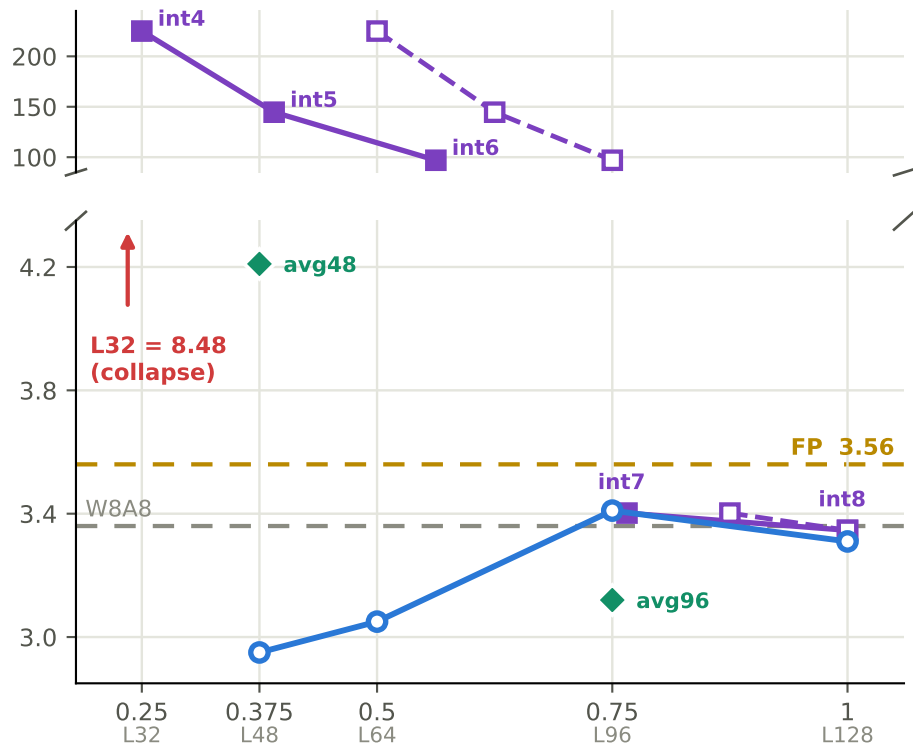

PSNR vs energy (↑ better, dB vs FP)

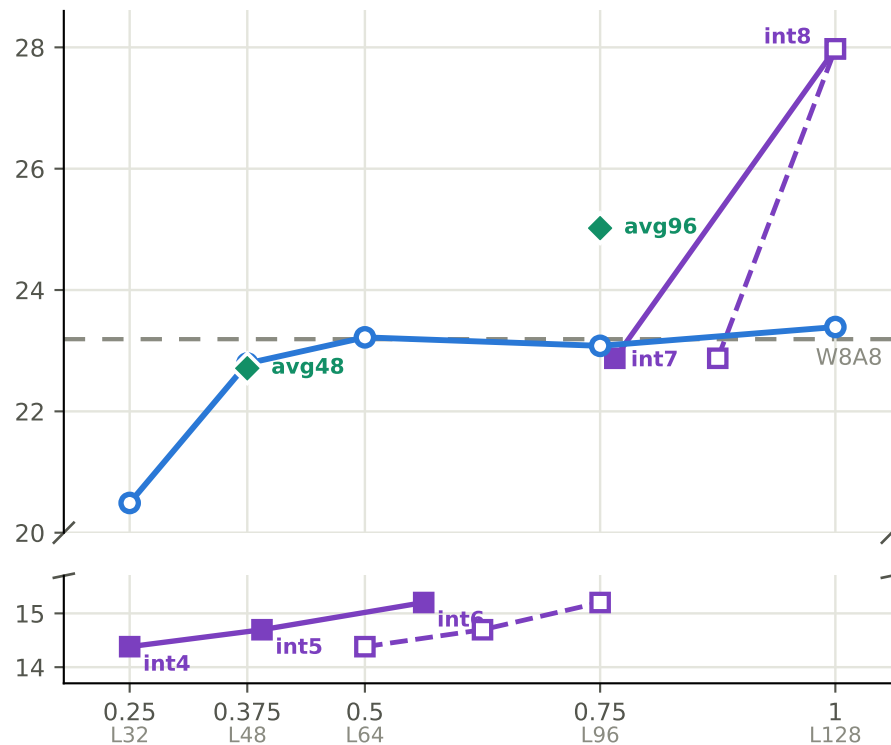

relative energy ($\times$ int8 MAC)

Uniform SC (fixed stoc_len)



Adaptive MP (FLOP-weighted)

int, best sym/asym ($E \propto n^2$)



int, best sym/asym ($E \propto n$)



relative energy ($\times$ int8 MAC)

W8A8 no-SC (int8 floor)



FP w16a16

