



7.5 inch E-paper Display Signage



®

GooDisplay

www.good-display.com

GDP075FU1

Dalian Good Display Co., Ltd.

Product Specifications



Customer	Standard
Description	ePaper Display
Model Name	GDP075FU1
Date	2024/12/16
Revision	V1.0

	Design Engineering		
	Approval	Check	Design
	宝刘印玉	燕修印凤	之吴印良

Zhongnan Building, No.18, Zhonghua West ST,Ganjingzi DST,Dalian,CHINA

Tel: +86-411-84619565

Email: info@good-display.com

Website: www.good-display.com

Contents

1. Overview	3
2. Product Advantages	3
3. Mechanical Specifications	3
4. Product Structure	4
5. Display Updates	5
6. Packaging and Installation	8
7. Precautions	8

1. Overview

The GDP075FU1 E-Paper Display Signage uses a traditional USB communication method. This signage is equipped with host software, enabling users to update the current display content directly from a PC. This design simplifies the update process, allowing users to import the required image into the software without a need for model conversion. With USB communication and host software, users can achieve instant updates of the signage content, ideal for scenarios requiring frequent updates or real-time information changes.

The device leverages the bistable characteristics of e-paper, allowing it to maintain the display content long-term without an internal battery.

2. Product Advantages

- Ultra-wide viewing angle, ultra-low power consumption
- Bistable display (retains the last image after power is off)
- USB-based content updates
- Supports image file formats: *.JPG, *.BMP

3. Structure Specification

Model	GDP075FU1
Specifications	Weight: Approx. 204g Size: 196x138x12mm
Display Specification	Screen Size: 7.5 inch Screen Type: Black, White, Red, Yellow ePaper Resolution: 800x480
Port Specification	USB Interface: Supports USB firmware updates
Power Specification	Operating Voltage: 5V Refresh Power: <200mW

Software Specification	Image Refresh Time: 20s Refresh Method: USB-based update Default Language: English
Mainboard Specification	USB Protocol: 2.0 MCU: STM32F103C6T6 RAM: 10KB ROM: 64KB Flash: 2M
Temperature and Humidity Specification	Operating Temperature: 0°C to 40°C Storage Temperature: -25°C to 70°C Operating Humidity: 40%-70%

4. Product Structure



Figure 1 : Front view of GDP075FU1



Figure 2 : Side view of GDP075FU1

- ① Micro USB Port - Insert the Micro USB cable here.

5. Display Updates


5.1 Image Requirements

- 1) Supported formats: *.BMP, *.JPG
- 2) Resolution: 800x480
- 3) Use the "ImageToUSB.exe" tool to import images into the software.

5.2 Serial Port Setup

- 1) CH340 Serial Port Driver Installation:

Double-click "SETUP.EXE" in the CH340 driver folder. Click "Install," and confirm completion once the installation finishes.



- 2) Open the ImageToUSB Tool:


Select the corresponding port. The information panel will display the available

ports on the computer. Choose the appropriate port. The "Clear" button can refresh the port list.



3) Connect the Serial Port:


Click "Connect." When the connection is successful, the information panel will display "Connect is success!"

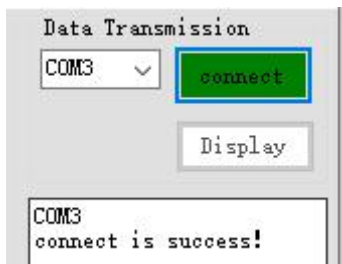

5.3 Image Display

1) Power the device and connect it to a computer via a Micro USB cable.

2) Open the ImageToUSB software. Click "Open File" , select an image (800x480 resolution in four colors: black, white, red, yellow). The software will display the image's dimensions and resolution.

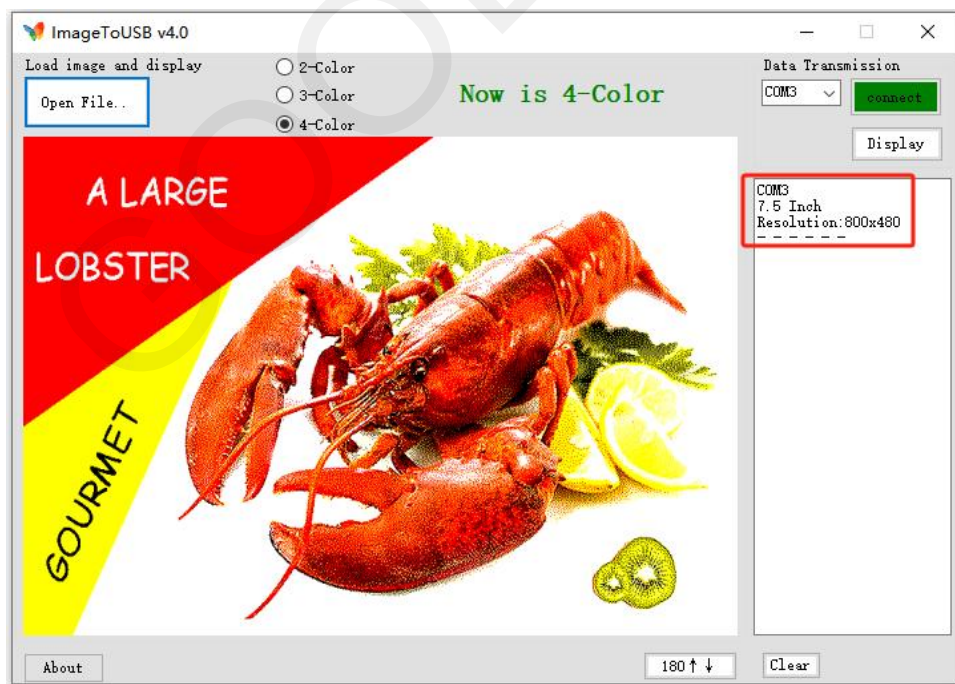

3) Choose the color mode:

2-Color: Black and White

3-Color: Black, White, and Red

4-Color: Black, White, Red, and Yellow

This signage supports 4-Color. Select accordingly.

☐ 2-Color
☐ 3-Color
☒ 4-Color

Now is 4-Color

- 4) Click "Display." Upon successful data transmission, the information panel will show "Successful handshake" along with progress and data size.



5.4 Common Issues

Issue	Solution
Cannot find port	Install CH340 driver or check cable.
Data transmission fails	Check connection and ensure correct port selection. If interrupted, reconnect the port and restart the software.


6. Packaging and Installation

6.1 Contents

- 1x E-Paper Display Signage
- 1x USB Cable



E-Paper Display Signage

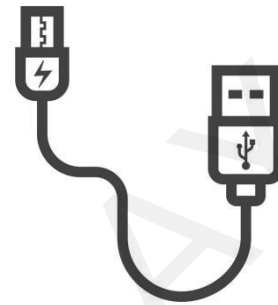

USB Cable

6.2 Installation

- Install on a flat surface. Ensure proper ventilation by leaving space behind the device.
- Avoid installing in kitchens, bathrooms, or humid environments, as this may shorten the product's lifespan.
- Do not install at altitudes above 3000 meters to prevent malfunctions.

7. Precautions

6.1 Transportation Precautions

- Avoid water exposure during transportation to prevent damage.
- Avoid pressing or squeezing the display during transportation to prevent screen damage.
- Keep the transportation temperature below 70°C.

6.2 Usage Precautions

- Operate within 0°C to 40°C.

- Regularly clean the screen.
- Avoid unauthorized disassembly, water exposure, and impacts.

6.3 Storage Precautions

- Store in a fireproof, moisture-proof environment (humidity $\leq 70\%$).
- Protect from high temperatures ($\leq 70^{\circ}\text{C}$), pressure, dirt, heavy objects, and damage.

GOODDISPLAY