

# Automated Plant Care

## 1 Introduction

The goal of this project is to implement reliable automation for plant care. Taking care of plants that yield something of value to the caretaker or his or her employer boils down to supplying the proper levels of light, hydration, and nutrients. Of these, the first two typically require the caretaker's attention at least once per day. The most severe potential consequence of neglect is, of course, death of the plant, which renders the entire effort futile.

The situation at hand involves a chronically negligent plant caretaker coupled with a low-light environment due to a large bush obstructing the only window. What is documented here are the steps involved to establish a back-end for the automation itself that is paired with an informative front-end that also sends alerts for key events, e.g. a malfunctioning pump.

## 2 System Overview

The two fundamental pieces of equipment are the light and the pump, and what they both have in common is that they run on AC power. Obviously, the controller for all of this – a Raspberry Pi – is only equipped to handle DC circuits at either 3.3 or 5 volts. While it's possible to do something with relays, nobody wants to explain their neat project to an angry fire marshal. Thus, for safety reasons, it has been elected to use a radio frequency (RF) transmitter paired with RF outlet switches to enable switching of the pump and light. This has an added benefit of greater freedom for routing power. The remainder of equipment to be used is given in the table below, and Fig. 5 provides a schematic.

Table 1: Equipment specifications for plant care and monitoring.

Item	Purpose	Seller or Spec
AC outlet switches	Allow RF control of AC appliances	<a href="#">Amazon</a>
Hygrometer	Monitoring of soil moisture	<a href="#">AliExpress</a>
Pump	Supply water to plant	<a href="#">Amazon</a>
Light	Provide correct spectrum for plant	Erligpowht 45 W grow light
Photoresistor	Ensure light is operating	GM5539
Raspberry Pi	Runs at least the back-end	Raspberry Pi 3B
Raspberry Pi camera	Visual of plant and maybe time-lapse	V2
Arduino Uno	Report analog sensor data	<a href="#">Amazon</a>

### 2.1 Operation

The most trivial part of how the system will operate pertains to the light, which will run on a 12 hour on/off schedule. Half-way through the day portion, the Raspberry Pi will take a still image of the plant. The photoresistor will be used to ensure the light is working as it should.

Next up is the pump operation. When the hygrometer indicates dry soil, the pump will operate for a brief TBD interval. This pump will be submerged in a reserve of water that will have a simple circuit that's nominally closed by the water itself until the reserve is nearing depletion.

## 2.2 Front-End Requirements

The front-end will provide a simple, vertically scrolling interface with metrics about delivery of light and water to the plant in the form of two time-series plots for the last 24 hours. Vertical axes will be the light level from the photoresistor and the moisture level from the hygrometer, respectively.

Below the plots, there will be status indicators for the light level, moisture level, and water reserve level. These will be boolean in nature, and the plant care-taker shall be notified in some way when one of these strays from nominal. At the bottom of the interface, the most recent picture of the plant will be displayed.

Hosting of the front-end will be on an AWS instance running an AMI generated by Packer and provisioned via Terraform. On this instance, a web server and a database will run in Docker containers orchestrated by Docker Compose. The web page will be open to the web, and everything else will only be open to the public IP of where the Pi is located.

## 3 Sensors and Circuits

### 3.1 RF Outlets

The starting point is to establish RF capability between the Pi and the RF outlets, which was accomplished by following the steps put forth by GitHub user timeland's [blog post](#) and the associated repository [rfoutlet](#). The basic procedure is to use an RF receiver to decode signals from the remote that came with the outlets, then use the RF transmitter to emulate the signal for a given channel. This yielded the codes given in the table below, and Fig. 1 shows the setup used. Also, since it's not explicitly called out, the transmitter and receiver use wiring pi pins zero and two, respectively.

Table 2: Codes transmitted by RF outlet remote.

Channel	On	Off
1	1398067	1398076
2	1398211	1398220
3	1398531	1398540
4	1400067	1400076
5	1406211	1406220

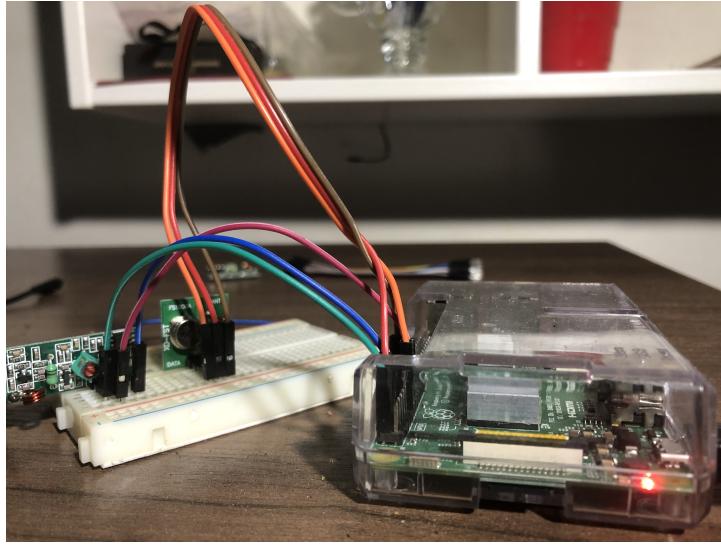


Figure 1: Setup for getting RF codes.

### 3.2 Photoresistor

A key detail is that a photoresistor is an analog device. Solutions for the Pi tended to involve capacitors that were not immediately available, so it was decided to use an Arduino Uno to handle analog inputs. Viewable in Fig. 2, the circuit for the photoresistor is a simple voltage divider, with one side wired to pin A0 and the other being a  $10k\ \Omega$  resistor leading to ground.

From here, using the Arduino IDE's serial monitor/plotter, it was verified that this arrangement yielded higher values with more light. It is worth noting that shadows cast substantially affect readings, so the sensor will have to be located in a place that won't be obstructed by leaves.

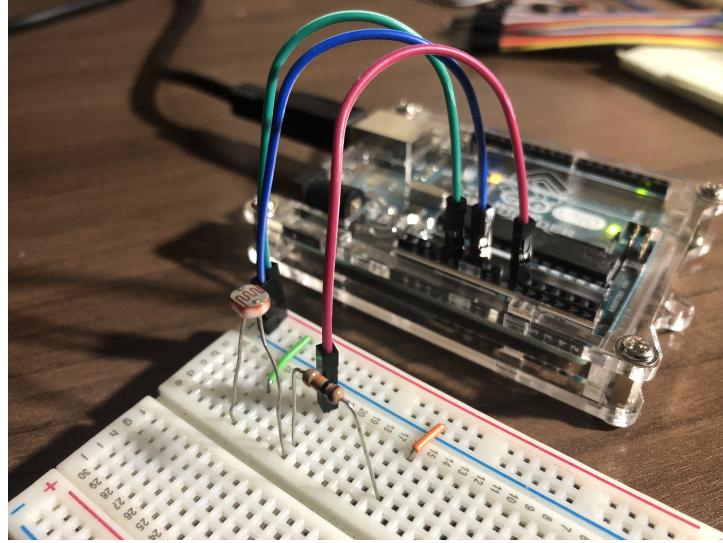


Figure 2: Circuit for testing photoresistor.

### 3.3 Hygrometer

The hygrometers purchased on Ali Express came with a small chip containing a potentiometer that converts the analog signal to a binary, digital one. The intended use is to set the potentiometer to a threshold value that would serve as a set-point for watering.

For this case, a low/high sensor isn't terribly interesting, so per Fig. 4, the photoresistor was swapped with the hygrometer in a cup of dry soil. To test the sensor, water was poured into the cup. Fig. 3 shows the serial plotter output for pouring a small bit of water followed by a sustained pour. By this metric, it seems feasible to incorporate the hygrometer as an analog device, which enables more interesting plots versus time than the digital option.

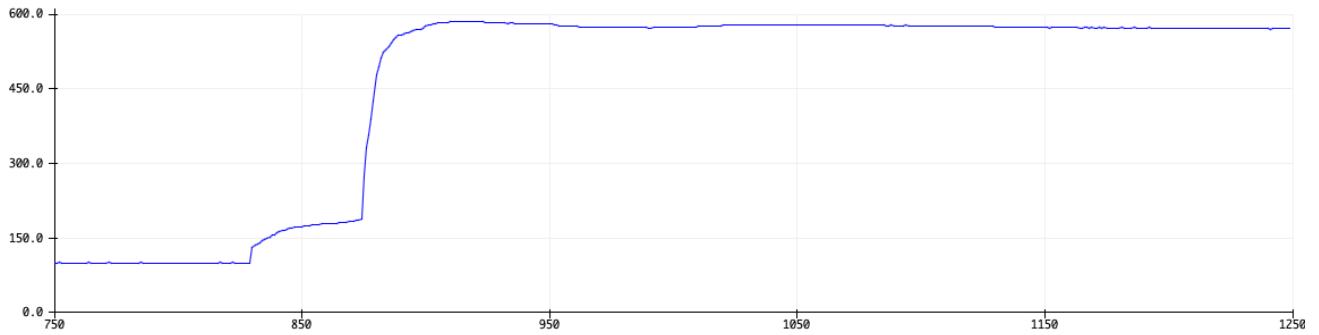


Figure 3: Soil moisture versus time (arbitrary units) as water was poured into the cup.

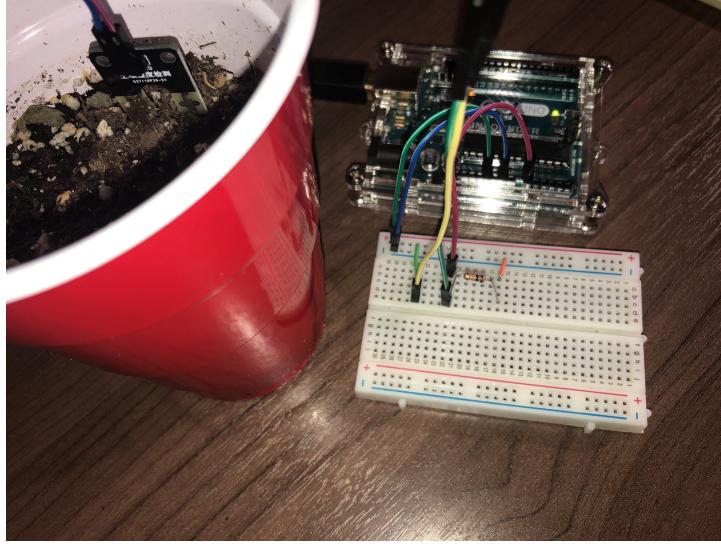


Figure 4: Circuit for testing hygrometer.

### 3.4 Water Level

This is certainly the easiest of the sensors to describe and implement. Similar to the others, a voltage divider will be used. When the leads are submerged in the water, the circuit is closed with negligible resistance, so the only change to the general circuit in use is to have another  $10k\ \Omega$  resistor placed in series with the analog pin. Given the trivial nature of the sensor, it was not deemed necessary to test this circuit.

### 3.5 Analog Sensor Summary

Investigating use of a photoresistor, hygrometer, and a simple water level sensor led to a few key findings. The most significant is that an Arduino is needed to bridge the gap between analog and the Raspberry Pi. Along with this, it was found that the same basic circuit – a voltage divider with a  $10k\ \Omega$  resistor on ground – can be employed for all three sensors.

These criteria informed the writing of the sketch shown in Fig. 6, which simply prints the state of the three pins delimited by commas. It is thought best to keep the Arduino sketch dead simple, because there's not a lot to work with as far as libraries or computing power. From here, the Raspberry Pi will be able to fetch sensor data as needed.

#### 4 Appendix

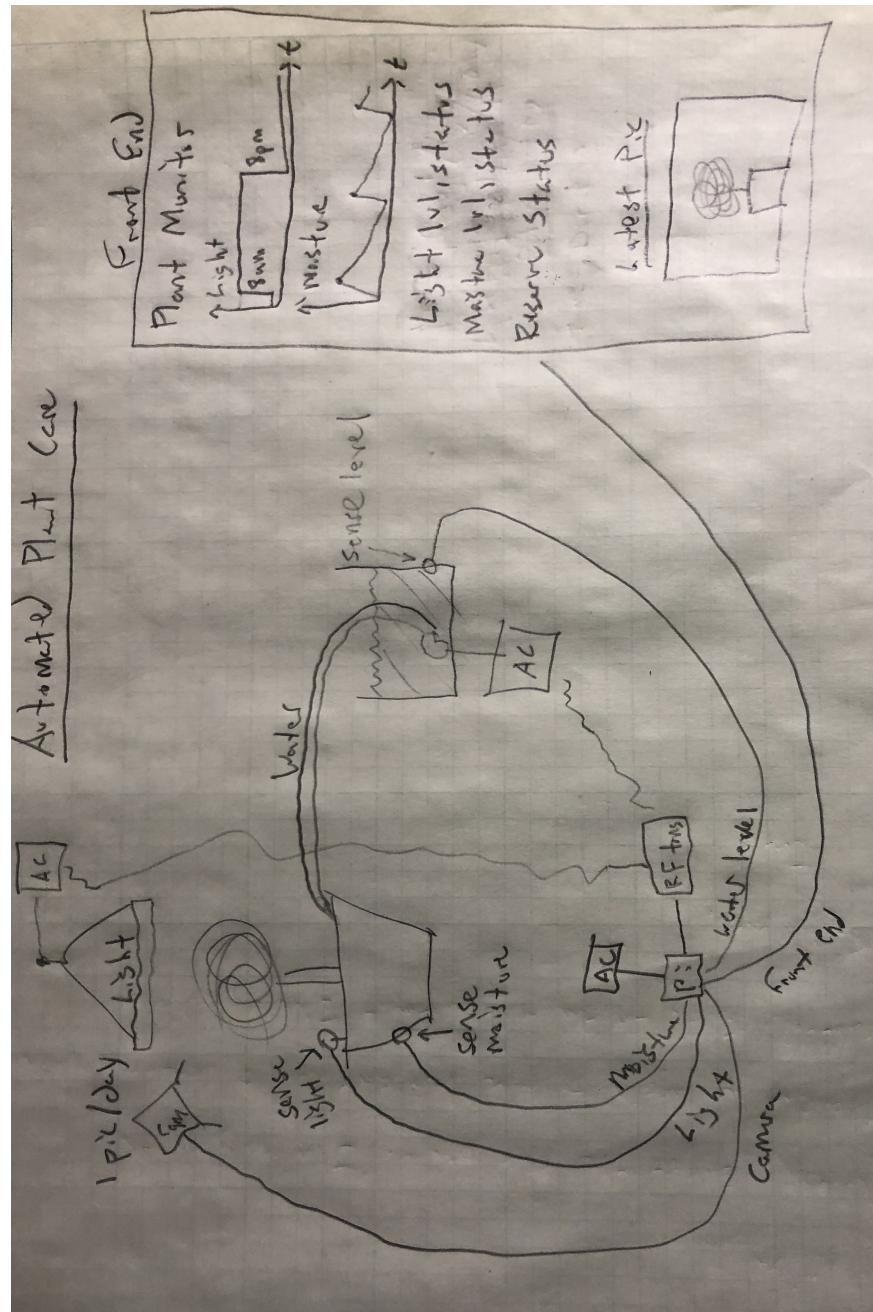


Figure 5: Schematic of plant automation system.

```

/*
 * This is a simple sketch for polling analog sensors used to track
 * levels of water and light being supplied to the plant.
 *
 * Pin layout
 * -----
 * A0: Photoresistor
 * A1: Hygrometer
 * A2: Water level sensor
 * -----
 */

void setup()
{
    Serial.begin(9600);
}

void loop()
{
    for (int i = A0; i < A3; i++)
    {
        // Read and map to 8 bits
        int val = analogRead(i);
        val = map(val, 0, 1023, 0, 255);

        // Print val
        Serial.print(val);

        // Print comma to continue line or newline
        char tailChar = ',';
        if (i == A2)
        {
            tailChar = '\n';
        }
        Serial.print(tailChar);
    }

    delay(50); // Milliseconds of pause between reads
}

```

Figure 6: Arduino sketch for reading the photoresistor, hygrometer, and water level sensor.