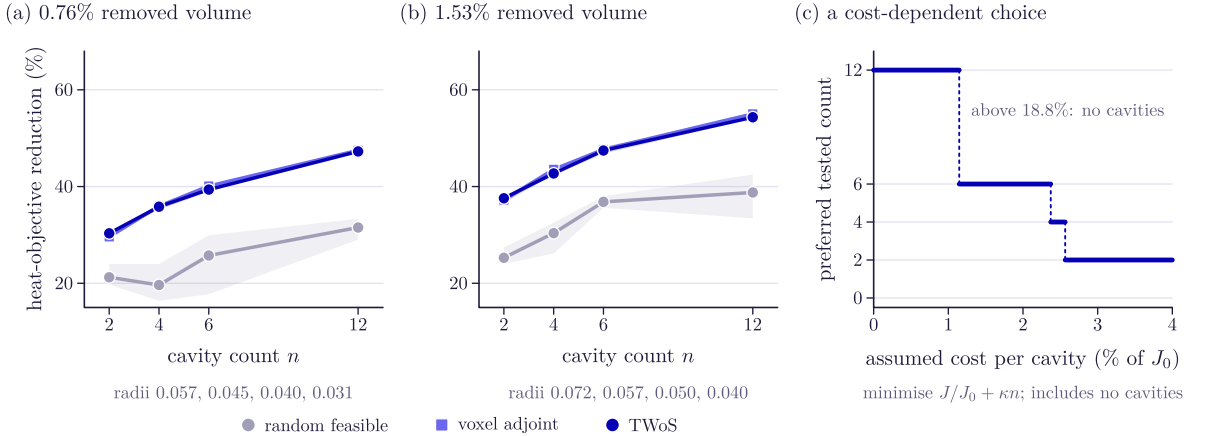

(a) 0.76% removed volume
(b) 1.53% removed volume
(c) a cost-dependent choice
heat-objective reduction (%)
60
40
20
2
4
6
12
cavity count n
radii 0.057, 0.045, 0.040, 0.031
radii 0.072, 0.057, 0.050, 0.040
preferred tested count
12
6
4
2
0
above 18.8%: no cavities
0
1
2
3
4
assumed cost per cavity (% of J_0)
minimise $J/J_0 + \kappa n$; includes no cavities
random feasible
voxel adjoint
TWoS