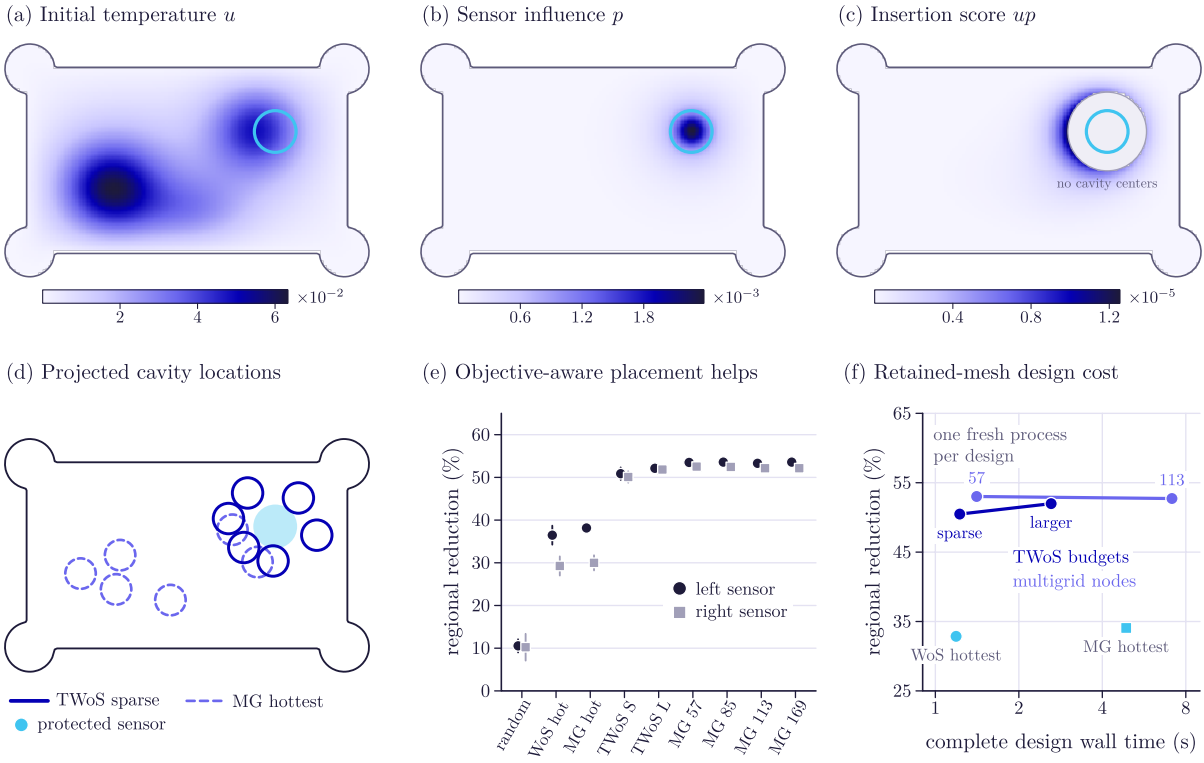

(a) Initial temperature u
2
4
6
$\times 10^{-2}$
(b) Sensor influence p
0.6
1.2
1.8
$\times 10^{-3}$
(c) Insertion score up
no cavity centers
0.4
0.8
1.2
$\times 10^{-5}$
(d) Projected cavity locations
TWoS sparse
MG hottest
protected sensor
(e) Objective-aware placement helps
regional reduction (%)
left sensor
right sensor
random
WoS hot
MG hot
TWoS S
TWoS L
MG 57
MG 85
MG 113
MG 169
(f) Retained-mesh design cost
one fresh process
per design
57
113
sparse
larger
TWoS budgets
multigrid nodes
WoS hottest
MG hottest
regional reduction (%)
complete design wall time (s)