

(a) Finned conduction housing

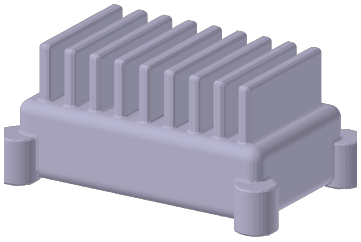


closed procedural mesh; 96,740 triangles


(b) Initial temperature, central cut

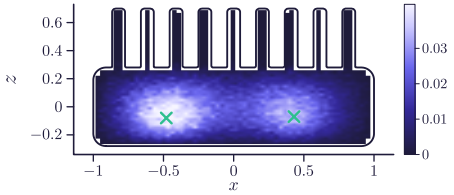

(c) Grid-free score $-D_T = u^2$

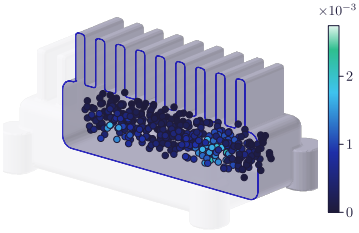


(d) Validated grid-free design

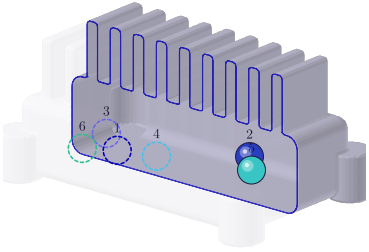

solid: rear cavities; dashed: cavities in the removed half

(e) Independently evaluated design

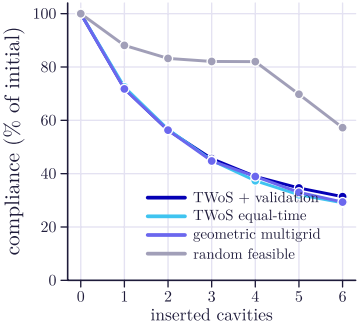

(f) Final reduction, independent designs

