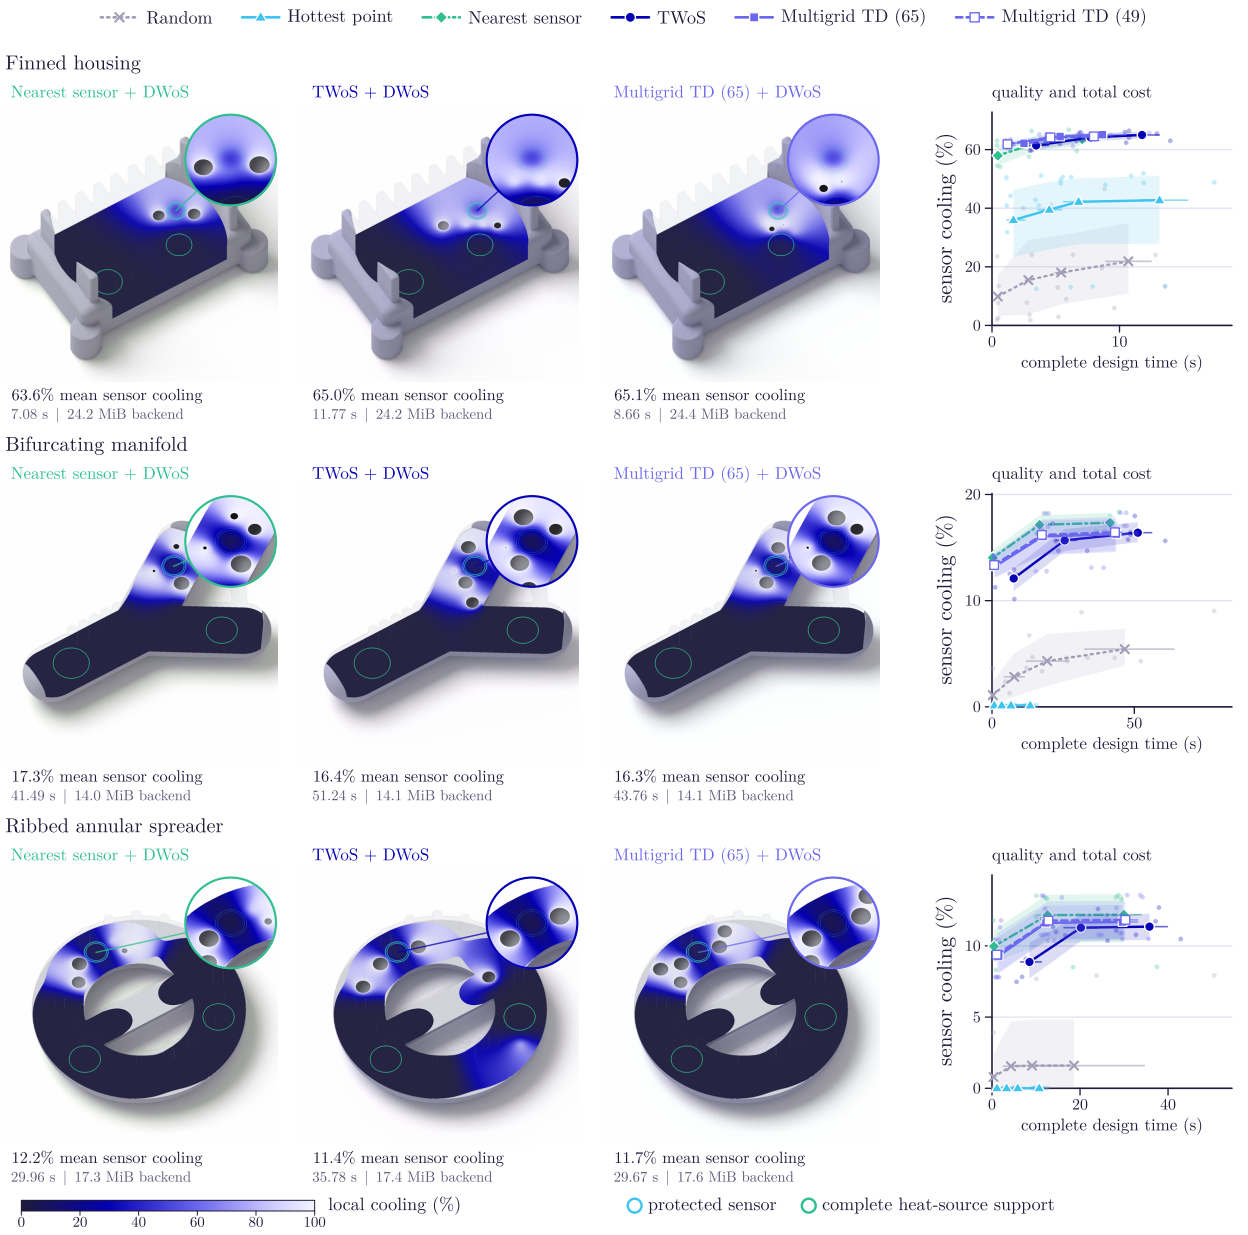

Random
Hottest point
Nearest sensor
TWoS
Multigrid TD (65)
Multigrid TD (49)
Finned housing
Nearest sensor + DWoS
TWoS + DWoS
Multigrid TD (65) + DWoS
quality and total cost
sensor cooling (%)
complete design time (s)
63.6% mean sensor cooling
7.08 s | 24.2 MiB backend
65.0% mean sensor cooling
11.77 s | 24.2 MiB backend
65.1% mean sensor cooling
8.66 s | 24.4 MiB backend
Bifurcating manifold
17.3% mean sensor cooling
41.49 s | 14.0 MiB backend
16.4% mean sensor cooling
51.24 s | 14.1 MiB backend
16.3% mean sensor cooling
43.76 s | 14.1 MiB backend
Ribbed annular spreader
12.2% mean sensor cooling
29.96 s | 17.3 MiB backend
11.4% mean sensor cooling
35.78 s | 17.4 MiB backend
11.7% mean sensor cooling
29.67 s | 17.6 MiB backend
local cooling (%)
protected sensor
complete heat-source support