



WOLF PACK

ATV & UTV



Main Feature

- » Alternating shoulder blocks for varied grip.
- » High void ratio for self-cleaning.
- » Central tread rib with sipes for stability.
- » Reinforced sidewalls for puncture resistance.
- » Directional tread pattern for better control.



RUN FLAT
P3266

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3031	25X10.00-12 12PR	21	9	10	24	1100	28	84J	40.37
WD3032	25X11.00-12 12PR	21	9	11	24	1100	28	84D	45.46

Main Feature

- » Aggressive central blocks for high traction.
- » Stepped shoulder lugs for better side grip.
- » High voids for mud evacuation.
- » Reinforced sidewalls for durability.
- » Zigzag central rib for stability.



RUN FLAT
P3036

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3033	28X10.00-14 12PR	26	8	10	27	1100	28	84D	47.16
WD3034	30X10.00-14 12PR	26	8	11	28	1100	28	84D	50.29

Main Feature

- » V-shaped lugs for forward traction.
- » High void ratio to clear debris.
- » Angular shoulder blocks for side grip.
- » Central tread blocks with sipes for wet traction.
- » Medium tread depth for mixed terrain performance.

RUN FLAT
P350



Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3023	26X9.00-12 12PR	25	7	9	26	1100	30	84F	40.04
WD3024	26X11.00-12 12PR	25	9	10	26	1200	28	87F	46.83
WD3025	25X8.00-12 12PR	25	7	8	24	900	28	76F	35.34
WD3026	25X10.00-12 12PR	25	8	9	25	1100	28	84F	38.71
WD3027	27X9.00-14 12PR	25	7	9	27	1100	28	84D	38.32
WD3028	27X11.00-14 12PR	25	9	11	27	1200	28	87D	45.39
WD3029	27X9.00-12 12PR	25	8	9	26	1100	28	84J	42.73
WD3030	27X11.00-12 12PR	25	7	10	26	1200	28	87J	49.01

Main Feature

- » Zigzag central rib for increased stability.
- » Deep, multi-directional lugs for enhanced traction.
- » Reinforced sidewalls for durability and puncture resistance.
- » High void ratio to prevent clogging with mud.
- » Shoulder lugs for improved cornering stability.



RUN FLAT P3077

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3035	23x11.00-10 12PR	18	8	10	23	1710	36	99B	28.73

Main Feature

- » Large, square lugs for heavy-duty traction.
- » Deep voids to prevent clogging.
- » Reinforced sidewalls for rugged terrain.
- » Prominent shoulder blocks for lateral stability.
- » Central zigzag pattern for enhanced control.



SU81

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
SP1001	25X8-12 8PR	25.2	6	7.6	24.5	555	18	60F	21.16
SP1002	25X10-12 8PR	18.9	7	9.8	25	680	18	67F	24.03
SP1003	26X9-12 8PR	18.9	7	8.8	25.8	680	18	67F	26.01
SP1004	26X11-12 8PR	25.2	9	10.5	26	820	18	73F	28.44
SP1005	27X9-12 8PR	25.2	8	8.6	26.8	775	18	71F	26.01
SP1006	27X11-12 8PR	25.2	8	10.5	26.8	845	18	74F	31.97
SP1007	26X9-14 8PR	25.2	7	8.6	25.8	640	18	65F	26.01
SP1008	26X11-14 8PR	25.2	8	10.5	25.8	750	18	70F	30.42
SP1009	27X9-14 8PR	27.72	7	8.5	27	680	18	67F	27.56
SP1010	27X11-14 8PR	27.72	8	10.4	27	820	18	73F	34.83
SP1011	30X10-14 8PR	31.5	8	9.2	29.8	910	18	77F	38.58

Main Feature

- » Large, aggressive lugs providing excellent traction.
- » Deep tread depth for improved off-road performance.
- » Wide voids between lugs to clear mud.
- » Strong shoulder blocks for sidewall protection.
- » Reinforced sidewall to resist punctures and abrasions.



F938

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WP2001	AT25x8.00-12 6PR	15	6.5	8.1	25.0	1640	31	98J	17.86
WP2002	AT25x10.00-12 6PR	15	8	9.8	25.0	1760	31	100J	21.16

Main Feature

- » Interlocking center lugs for stable grip.
- » Moderate tread depth for all-round use.
- » Stepped shoulder lugs for additional bite.
- » Wide grooves to expel mud and snow.
- » Reinforced sidewall for added durability.



P350

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WP1001	AT25X8.00-12 6PR	25	7	8.2	24.8	340	7	41F	20.77
WP1002	AT25X10.00-12 6PR	25	8	10.0	24.8	420	7	43J	24.41
WP1003	AT26X9.00-12 6PR	25	7	9.3	26.1	410	7	58J	23.63
WP1004	AT26X10.00-12 6PR	25	8	9.8	26.1	440	7	49J	25.71
WP1005	AT26X12.00-12 6PR	25	10	12.0	26.1	520	7	58J	28.99
WP1006	27X9.00R14 6PR	25	7	8.9	27.0	585	14	74J	27.67
WP1007	27X11.00R14 6PR	25	8	10.0	27.0	750	12	54J	32.30

Main Feature

- » Large, square lugs for heavy-duty traction.
- » Deep voids to prevent clogging.
- » Reinforced sidewalls for rugged terrain.
- » Prominent shoulder blocks for lateral stability.
- » Central zigzag pattern for enhanced control.



P373

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WP1008	AT24X8-12 6PR	19	6	7.4	24.0	252	7	39K	15.59
WP1009	AT24X10-11 4PR	19	8	9.8	24.0	340	5	43G	19.00
WP1010	AT25X8-12 6PR	19	6	7.7	25.1	340	7	43J	16.16
WP1011	AT25X10-12 6PR	19	8	9.3	25.3	420	7	50F	19.60
WP1012	AT26X8-12 6PR	19	6	7.7	25.1	340	7	43J	17.73
WP1013	AT26X9-12 6PR	20	7	9.0	26.0	410	7	49F	18.94
WP1014	AT26X10-12 6PR	20	8	10.1	26.0	440	7	52F	20.70
WP1015	AT26X9-14 6PR	20	7	9.0	26.0	395	7	48F	19.09
WP1016	AT26X11-14 6PR	20	9	11.2	26.0	465	7	54F	22.18

Main Feature

- » Large, square central lugs for maximum traction.
- » High void ratio to prevent clogging.
- » Stepped shoulder blocks for side grip.
- » Reinforced sidewalls for durability.
- » Siped central lugs for enhanced wet grip.




P375

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3004	25X8-12 6PR	33	6.5	8.0	24.9	340	7	43J	22.88
WD3005	25X9-11 6PR	31	7	8.7	25.0	385	7	47J	25.18
WD3006	25X10-11 6PR	31	8	9.6	25.4	420	7	50J	26.26
WD3007	25X10-12 6PR	33	8	9.8	24.9	420	7	50J	25.86
WD3008	25X11-10 6PR	35	9	10.7	25.2	455	7	53J	31.11
WD3009	26X9-12 6PR	35	7	8.6	26.1	410	7	49J	27.23
WD3010	26X12-12 6PR	35	9.5	11.4	26.2	520	7	58J	31.33
WD3011	27X9-12 6PR	35	7	8.9	27.1	440	7	52J	28.73
WD3012	27X12-12 6PR	35	9.5	11.3	27.6	550	7	60J	34.63

Main Feature

- » Alternating shoulder blocks for varied grip.
- » High void ratio for self-cleaning.
- » Central tread rib with sipes for stability.
- » Reinforced sidewalls for puncture resistance.
- » Directional tread pattern for better control.

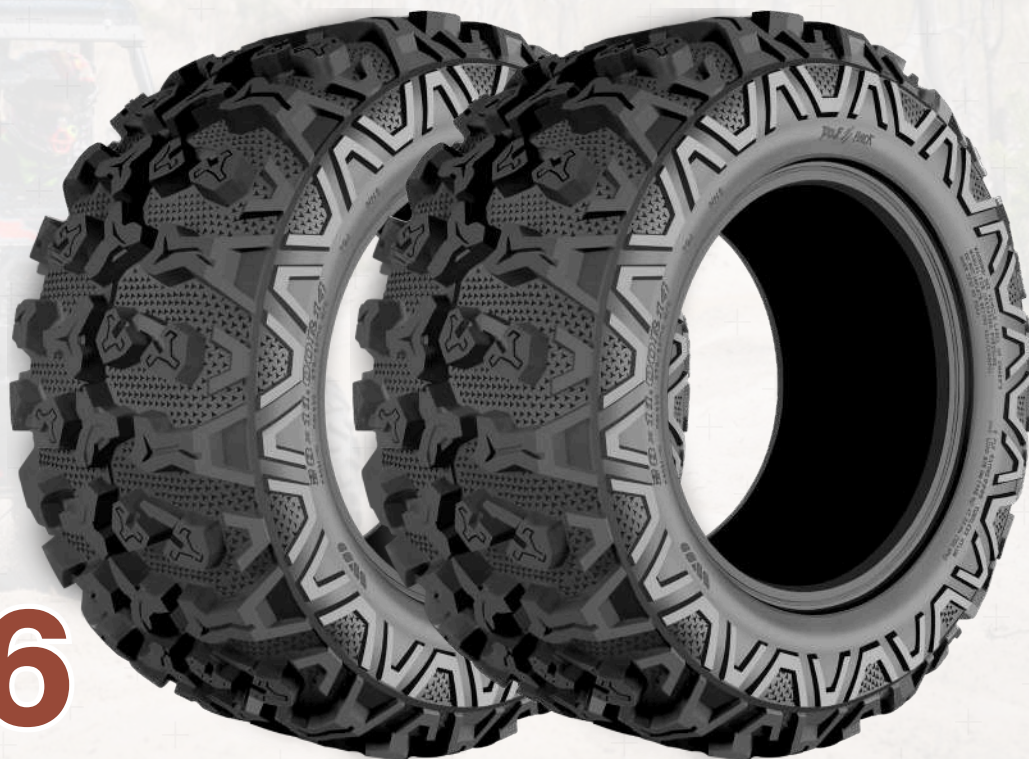

P3036

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3013	27X9R14 8PR	26	7	27.0	8.9	730	20	70J	28.68
WD3014	27X11R14 8PR	26	9	27.0	10.8	930	22	78J	32.83
WD3015	28X9R14 8PR	26	7	28.0	8.9	770	20	71J	31.06
WD3016	28X10R14 8PR	26	8	28.0	9.8	900	22	77J	34.72
WD3017	28X10R15 8PR	26	8	28.0	9.6	900	22	77J	35.71
WD3018	28X11R14 8PR	26	9	28.0	10.8	975	22	79J	35.80
WD3019	29X9R14 8PR	26	7	29.0	8.9	830	20	74J	33.95
WD3020	29X11R14 8PR	26	9	29.0	10.8	1000	22	80J	36.95
WD3021	30X10R14 8PR	26	8	30.0	9.8	1000	22	80J	35.43
WD3022	30X10R15 8PR	26	8	30.0	9.6	1000	22	80J	35.03

Main Feature

- » Large, square lugs for heavy-duty use.
- » Deep voids to prevent clogging.
- » Strong shoulder blocks for sidewall protection.
- » Reinforced sidewalls for rugged terrain.
- » Central zigzag pattern for enhanced control.



P3057

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3063	AT25x8R12 10PR	19	6.5	8.0	25.2	695	28	68M	26.54
WD3055	AT25x10R12 10PR	19	8	9.8	25.2	805	26	73M	30.93
WD3046	AT26x10R12 10PR	19	8	10.1	26.2	535	26	59M	33.82
WD3038	AT27x9R12 10PR	22	7	8.9	27.2	550	28	60M	33.77
WD3039	AT27x11R12 10PR	22	8	10.5	27.2	615	26	64M	38.49
WD3041	AT27x9R14 10PR	22	7	9.2	26.9	740	24	70M	33.91
WD3044	AT27x11R14 10PR	22	9	10.9	27.0	935	24	78M	37.85
WD3065	AT28x10R14 10PR	19	8	10.0	28.3	760	28	71M	35.27
WD3067	AT30x10R14 10PR	19	8	10.0	30.1	640	24	65M	37.83
WD3068	AT30x10R15 10PR	19	8	10.0	30.1	640	24	65M	36.95

Main Feature

- » Large, triangular lugs for varied grip.
- » Shoulder scallops for increased side traction.
- » Intermediate tread depth for versatility.
- » Wide lateral grooves to shed mud.
- » Siped central lugs for wet surface traction.



P3108

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3056	AT25x8R12 8PR	23	6.5	8.0	25.2	640	22	65J	20.04
WD3040	AT25X10R12 8PR	23	7	9.6	25.2	785	22	72J	24.49
WD3054	AT26x9R14 8PR	25	7	8.7	26.2	670	20	67J	25.35
WD3052	AT26x11R14 8PR	25	8	10.9	26.2	880	22	76J	30.05
WD3048	AT27x9R14 8PR	25	7	8.9	27.2	740	20	70J	25.44
WD3045	AT27X11R14 8PR	25	9	10.8	27.3	935	22	78J	30.51

Main Feature

- » Triangular lugs for multi-directional grip.
- » Alternating lug pattern for balanced traction.
- » Intermediate tread depth for versatile performance.
- » Shoulder siping for enhanced grip on corners.
- » Central rib with zigzag pattern for stability.



P341

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3037	AT25x8.00-12 6PR	25	6.5	7.9	25.1	340	7	43F	20.79
WD3036	AT25x10.00-12 6PR	25	8	9.4	25.1	420	7	50F	23.68
WD3047	AT24x9.00-11 6PR	25	7	8.3	23.9	365	7	45J	19.84
WD3042	AT24X10.00-11 6PR	25	8	9.8	23.9	395	7	48F	23.85
WD3049	AT23x8.00-11 6PR	25	6.5	7.9	23.0	290	7	38F	19.18
WD3050	AT24x11.00-10 6PR	25	9	10.8	24.2	440	7	52F	25.20
WD3053	AT25x12.00-9 6PR	25	9.5	11.7	25.0	495	7	56J	27.56
WD3057	AT22x11.00-10 6PR	20	9	10.8	22.0	385	7	47J	20.57
WD3058	AT25x12.00-10 6PR	25	9.5	11.4	25.1	495	7	56J	29.03
WD3060	AT24x8.00-11 6PR	25	6.5	8.1	23.9	320	7	41J	19.38
WD3061	AT22x8.00-10 6PR	20	6.5	7.8	22.0	275	7	36J	16.03
WD3062	AT26x10.00-12 6PR	25	8	9.8	26.0	440	7	52J	24.36
WD3066	AT23x10.00-10 6PR	25	8	9.5	23.0	375	7	46F	23.88

Main Feature

- » Directional tread pattern for forward motion.
- » Large central blocks for high traction.
- » Staggered shoulder lugs for cornering stability.
- » High void ratio for quick cleaning.
- » Cross-cut sipes for improved wet grip.



P362

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WD3051	AT26x9.00-12 8PR	24	7	8.3	26.2	715	20	69J	21.36
WD3043	AT26x11.00-12 8PR	24	9	10.6	26.4	910	22	77J	26.17
WD3064	AT25x8.00-12 8PR	24	6.5	7.8	25.2	660	20	66J	19.14
WD3059	AT25x10.00-12 8PR	24	8	9.8	25.2	785	20	72J	22.69

SU83



Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
SP1022	28x10-14 8PR	50.39	8	10.7	29	880	18	76F	44.53
SP1023	30x10-14 8PR	50.39	8	10.5	30	960	18	79F	54.45
SP1024	32x10-14 8PR	50.39	8	10.5	32	1040	18	82F	55.56
SP1025	32x10-15 8PR	50.39	7	10.5	32	1080	18	83F	56.88
SP1026	32x10-16 8PR	50.39	7	10.5	32	1120	18	84F	59.08
SP1027	34x10-15 8PR	50.39	7	10.6	34	1240	18	88F	60.19
SP1028	34x10-16 8PR	50.39	7	10.5	34	1200	18	87F	60.19
SP1029	34x10-18 8PR	50.39	8	10.5	34	1120	18	84F	60.63

Golf Cart Tire

Main Feature

- » All-Terrain tubeless tire
- » Deep tread depth
- » Durable and affordable
- » Reinforced sidewalls for durability



CANIS

Item	Size	T/D X/32	RIM (Inch)	SW (Inch)	OD (Inch)	Max Load (Lbs)	PSI	Load/Speed Index	Weight (Lbs)
WP3010	18X8.50-8	7	7	8.5	18	1050	34	82	10
WP3014	205/50-10	7	6.5	8	18	675	30	67	10.36
WP3015	215/40-12	7	7	18.5	8.5	705	30	68	9.7

What is run-flat tire?

A run-flat tire is a pneumatic vehicle tire designed to resist the effects of deflation when punctured, allowing the vehicle to continue to be driven at reduced speeds for limited distances, about 50 miles, so you can take time to get to an auto shop or find a safe area to change your tire.

First developed by tire manufacturer Michelin in the 1930s, run-flat tires were introduced to the public market in the mid-1980s. They have increased in popularity over time.

OUR CORE VALUES



PROFESSIONAL

Sutong has over 40 years of experience in the tire industry, serving as a global resource integrator and supply chain expert, with a dedicated team providing 24-hour service worldwide.



PRECISE

Sutong ensures 90-day delivery for overseas shipments, 5-day delivery from distribution centers, and 24-hour outbound for online orders, maintaining a 98% fill rate for precise and efficient service.



PERSONAL

Sutong customizes programs for each customer, treating them like family. We personalize all our services, deeply caring about our customers' success, because their success is our success.

Sutong
Tire Resources, Inc.



33402 Highway 290, Hockley TX 77447
Tel: (713) 690-5500 Fax: (713) 690-5501