
**REVISIONS APPROVED REV DESCRIPTION** DATE **RELEASE/CHANGE PER EC115937 SEE AGILE SEE AGILE** 

SOLIDWORKS DRAWING: ALL CHANGES MUST BE DONE IN SOLIDWORKS DATABASE.

- 1							-1
	CONNEC	CTOR 1		FORMED WIRE	CONNECTOR 2		
$\dashv$	START	SHEATH	CODE	COLOR	SHEATH	END	íĿ
	1	SHEATH 1	CABLE	BLACK	N/A	1	H
	2	SHEATH 1	OABLE	BROWN	N/A	2	II.
	DESIGNATION	REFERENCE			DESIGNATION	REFERENCE	1
	CONNECTOR 1	1 MALE CONNECTOR, 8 CONTACTS, HIROSE HR25A-7P-8P		SHEATH 1	HEATSHRINK TUBE, CHANGYUAN, CB-HTF, Ø10*6.0mm, BLACK OR TE RNF 100		
В						FERRITE: WURTH, P/NO. 74270057 OVERMOULD: MEGA PLASTICS 45P, PVC, BLACK, UL94V-0	В
	CABLE	COPARTNER P/NO50321, UL2464 #28*3C (Red, Black & Brown), OD: 4.1(Black)			LABEL	MATERIAL: TRANSLUCENT VINYL, .004" AVERAGE THICKNESS WITH WHITE PRINT AREA AND PERMANENT ACRYLIC ADHESIVE APPLIED TO BACK SURFACE MOUNTED ON RELEASE PAPER BACKING. DIMENSIONS (MINIMUM): OVERALL SIZE: 25x36mm, PRINT AREA: 25x12mm.  MANUFACTURERS DETAILS: FASSON BW4444 OR BRADY B-451	İ
					PROTECTIVE SLEEVE	MATERIAL: FLEXIBLE, HEATSHRINKABLE AND FLAME RETARDAND POLYOLEFIN. DIMENSIONS: MAXID WHEN RECOVERED: 3.5mm, MIN WALL THICKNESS: 0.55mm, COLOR: CLEAR	Ĺ
	CONNECTOR 2			REF : FUANGEE, P6106-3S00 FICS 45P, PVC, BLACK, UL94V-0	N/A	N/A	İ

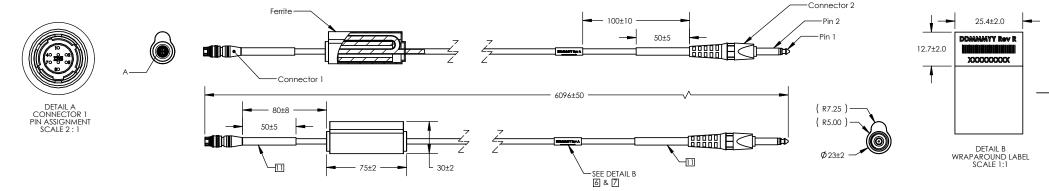

NOTES: UNLESS OTHERWISE SPECIFIED. APPLICABLE STANDARDS/SPECIFICATIONS: ASME Y14.3-2007, MULTIVIEW AND SECTIONAL VIEW DRAWINGS. ASME Y14.4M-2009, PICTORIAL DRAWINGS. ASME Y14.5M-2009, DIMENSIONS AND TOLERANCES. ASME Y14.38A.-2007, ABBREVIATIONS AND ACRONYMS.

- 2 ALL DIMENSIONS ARE IN MILLIMETERS.
- REQUIRED SPECIFICATION: COND. RESISTANCE: MAX 2Ω INSULATION RESISTANCE: MIN 20Ω TESTING VOLTAGE: MAX 200V DC
- 4 CERTIFICATE OF CONFORMANCE REQUIRED INCLUDING 100% INSPECTION FOR CONTINUITY AND PIN DESIGNATION
- 5 CABLES TO BE PACKAGED INDIVIDUALLY. THE PACKAGE MUST BE LABELED WITH THE COVIDIEN P/N, REVISION, DATE CODE, THE WEEE SYMBOL AND PART DESCRIPTION (SAME AS DRAWING TITLE). 9 & 10
- [6] LABEL MUST INCLUDE THE FOLLOWING: PART NUMBER, REVISION, DATE CODE AND THE TEXT: "NORMALLY OPEN". [7] & [10]
- 7 PROTECTIVE SLEEVE MUST BE APPROPRIATELY SIZED TO PROVIDE SUITABLE PROTECTION FOR THE PRINTED LABEL.
- 8 PARTS / COMPONENTS TO BE ROHS COMPLIANT 4
- THE DATE CODE MUST BE FORMATTED AS FOLLOWS "DDMMMYY". 12
- [TO] LABEL TEXT MUST BE APPROPRIATELY SIZED AND CLEARLY LEGIBLE. COLOR SHALL BE BLACK TEXT ON A WHITE BACKROUND.
- III A HEAT SHRINK SLEEVE MUST BE APPLIED TO THE SECTION AS SHOWN MATERIAL: FLEXIABLE, HEATSHRINKABLE AND FLAME RETARDAND POLYOLEFIN, COLOR: RED.

GENERAL DIMENSIONAL TOLERANCES				PROPRIETARY & CONFIDENTIAL. THIS DOCUMENT MAY NOT BE COPIED, DISCLOSED, OR USED IN WHOLE OR IN PART WITHOUT THE CONSENT OF COVIDIEN.		
DEC.	DEC.	DEC.	DEC.			
X. +/-	.x +/-	.xx +/-	.xxx +/-	REMOTE ALARM	Covidien	
-	-	-	-	CABLE, GEN 2, JACK	6135 Gunbarrel Avenue	
DEC.	HOLES	FRAC.	ANG.	0/10/2/02/3/10/1	Boulder, CO 80301	
	.,	.,,	.,	I 1 / A'' - KIMDAAA I I V MDEKII	B001aC1, C0 00301	

-	-	-	-	CABLE, GEN 2, JACK
DEC.	HOLES	FRAC.	ANG.	
.xxxx +/-	+/-	+/-	+/-	1/4", NORMALLY OPEN
-	1	-	-	[
SCALE	. 1/1			

SIZE FILENAME:

SCALE. 1/1	DRAWN:	DATE: 25TH JUNE '12
DO NOT SCALE DRAWING	CHECKED: SEE AGILE	DATE: SEE AGILE
	CHECKED, GEE MORE	DATE: SEE AOIEE
THIRD ANGLE PROJECTION	APPROVED: SEE AGILE	DATE: SEE AGILE

10003919.SLDDRW

© 2012 COVIDIEN ALL RIGHTS RESERVED.

DD: DAY OF PRODUCTION (E.G. 01)
MMM: MONTH OF PRODUCTION (E.G. JAN)

YY: YEAR OF PRODUCTION (E.G. 12)

DESCRIPTION: NORMALLY OPEN XXXXXXXX: PART NUMBER

SHEET: 1 OF

NOTES CONTINUED:

12 LABEL PRINT DETAILS:

R: PART REVISION