
**REVISIONS APPROVED REV DESCRIPTION** DATE **RELEASE/CHANGE PER EC115937 SEE AGILE** SEE AGILE SOLIDWORKS DRAWING: ALL CHANGES MUST BE DONE IN SOLIDWORKS DATABASE.

CONNECTOR 1		FORMED WIRE		CONNECTOR 2		
START	SHEATH	CODE	COLOR	SHEATH	END	
1	SHEATH 1	CABLE	BLACK	N/A	1	
3	SHEATH 1		BROWN	N/A	2	
DESIGNATION	REFERENCE			DESIGNATION	REFERENCE	
CONNECTOR 1	MALE CONNECTOR, 8 CONTACTS, HIROSE HR25A-7P-8P			SHEATH 1	HEATSHRINK TUBE, CHANGYUAN, CB-HTF, Ø10*6.0mm, BLACK OR TE RNF100	
	COPARTNER P/NO50321, UL2464 #28*3C (Red, Black & Brown), OD: 4.1(Black)			FERRITE	FERRITE: WURTH, P/NO. 74270057 OVERM OULD: M EGA PLASTICS 45P, PVC, BLACK, UL94V-0	
CABLE				LABEL	MATERIAL: TRANSLUCENT VINYL, .004" A VERAGE THICKNESS WITH WHITE PRINT AREA AND PERMANENT ACRYLIC ADHESIVE APPLIED TO BACK SURFACE MOUNTED ON RELEASE PAPER BACKING. DIMENSIONS (MINIMUM): OVERALL SIZE: 25x36mm, PRINT AREA: 25x12mm. MANUFACTURERS DETAILS: FASSON BW4444 OR BRADY B-451	
					MATERIAL: FLEXIBLE, HEATSHRINKABLE AND FLAME RETARDAND POLYOLEFIN. DIMENSIONS: MAX ID WHEN RECOVERED: 3.5mm, M IN WALL THICKNESS: 0.55mm, COLOR: CLEAR	
CONNECTOR 2	1/4" PHONE PLUG, MALE, REF : FUANGEE, P6106-3S00 OVERMOULD: MEGA PLASTICS 45P, PVC, BLACK, UL94V-0			N/A	N/A	

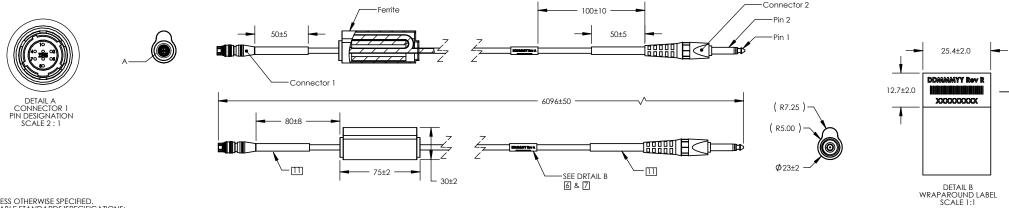

NOTES: UNLESS OTHERWISE SPECIFIED. APPLICABLE STANDARDS/SPECIFICATIONS: ASME Y14.3-2007, MULTIVIEW AND SECTIONAL VIEW DRAWINGS. ASME Y14.4M-2009, PICTORIAL DRAWINGS. ASME Y14.5M-2009, DIMENSIONS AND TOLERANCES. ASME Y14.38A.-2007, ABBREVIATIONS AND ACRONYMS.

- 2 ALL DIMENSIONS ARE IN MILLIMETERS.
- REQUIRED SPECIFICATION: COND. RESISTANCE: MAX  $2\Omega$ INSULATION RESISTANCE: MIN 200 TESTING VOLTAGE: MAX 200V DC
- [4] CERTIFICATE OF CONFORMANCE REQUIRED INCLUDING 100% INSPECTION FOR CONTINUITY AND PIN DESIGNATION
- 5 CABLES TO BE PACKAGED INDIVIDUALLY. THE PACKAGE MUST BE LABELED WITH THE COVIDIEN P/N, REVISION, DATE CODE, THE WEEE SYMBOL AND PART DESCRIPTION (SAME AS DRAWING TITLE). [9] & [10]
- [] LABEL MUST INCLUDE THE FOLLOWING: PART NUMBER, REVISION, DATE CODE AND THE TEXT: "NORMALLY CLOSED". [] & [10]
- PROTECTIVE SLEEVE MUST BE APPROPRIATELY SIZED TO PROVIDE SUITABLE PROTECTION FOR THE PRINTED LABEL.
- 8 PARTS / COMPONENTS TO BE ROHS COMPLIANT 4
- 7 THE DATE CODE MUST BE FORMATTED AS FOLLOWS "DDMMMYY". 12
- [10] LABEL TEXT MUST BE APPROPRIATELY SIZED AND CLEARLY LEGIBLE. COLOR SHALL BE BLACK TEXT ON A WHITE BACKROUND.
- III A HEAT SHRINK SLEEVE MUST BE APPLIED TO THE SECTION AS SHOWN MATERIAL: FLEXIABLE, HEATSHRINKABLE AND FLAME RETARDAND POLYOLEFIN, COLOR: YELLOW.

GENERAL DIMENSIONAL TOLERANCES				PROPRIETARY & CONFIDENTIAL, THIS DOCUMENT MAY N PART WITHOUT THE CONSENT OF COVIDIEN.	OT BE COPIED, DISCLOSED, OR USED IN WHOLE OR IN	
DEC.	DEC.	DEC.	DEC.	TIT! 5	_	
X. +/-	.x +/-	.xx +/-	.xxx +/-	REMOTE ALARM	Covidien	
-				CABLE, GEN 2, JACK	6135 Gunbarrel Avenue	
DEC.	HOLES	FRAC.	ANG.		Boulder, CO 80301	
.xxxx +/-	+/-	+/-	+/-	1/4", NORMALLY	© 2012 COVIDIEN ALL RIGHTS RESERVED.	
-	-	-	-	CLO2ED	SIZE FILENAME:	
SCALE: 1/1				DRAWN: DATE: 25TH JUNE '12	A3 10094353.SLDDRW	

NE '12 CHECKED: SEE AGILE DATE: SEE AGILE

DD: DAY OF PRODUCTION (E.G. 01)
MMM: MONTH OF PRODUCTION (E.G. JAN)
YY: YEAR OF PRODUCTION (E.G. 12)

DESCRIPTION: NORMALLY CLOSED

APPROVED: SEE AGILE DATE: SEE AGILE SHEET: 1 OF

THIRD ANGLE PRO JECTION

DO NOT SCALE DRAWING

NOTES CONTINUED: 12 LABEL PRINT DETAILS:

R: PART REVISION

XXXXXXXX: PART NUMBER