4.1 Initial Setup Wizard

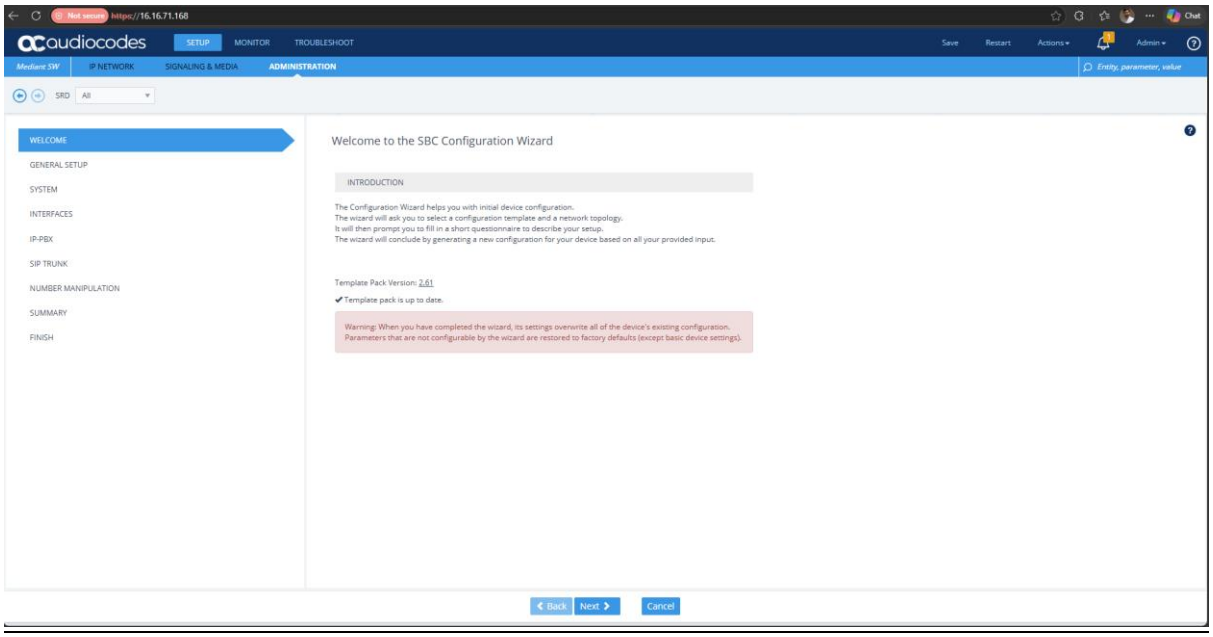

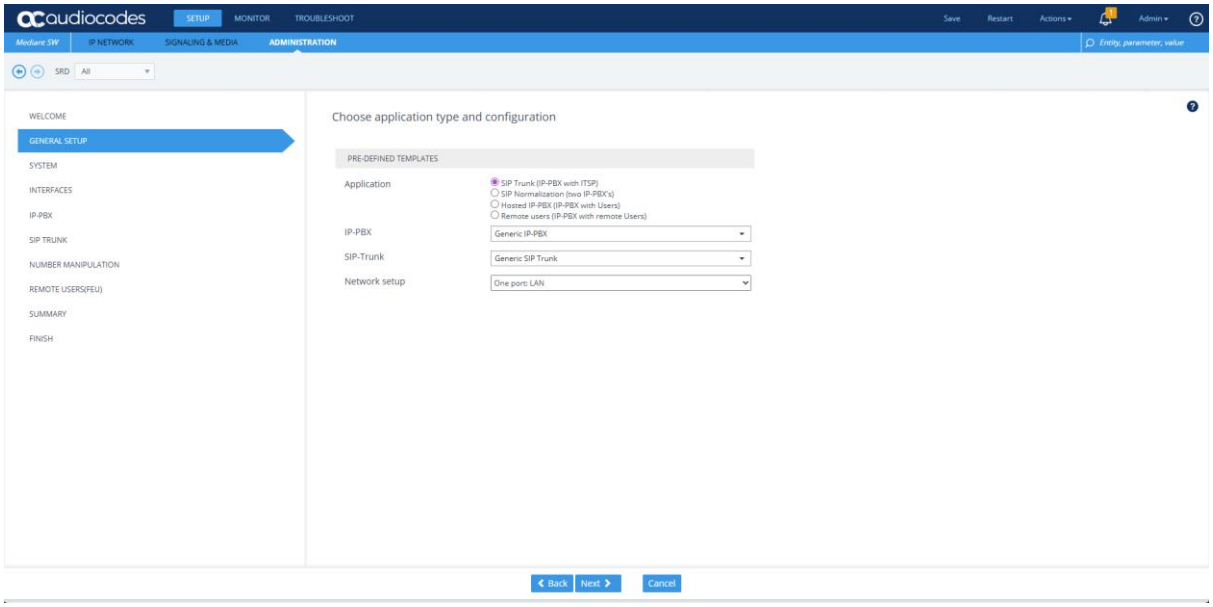

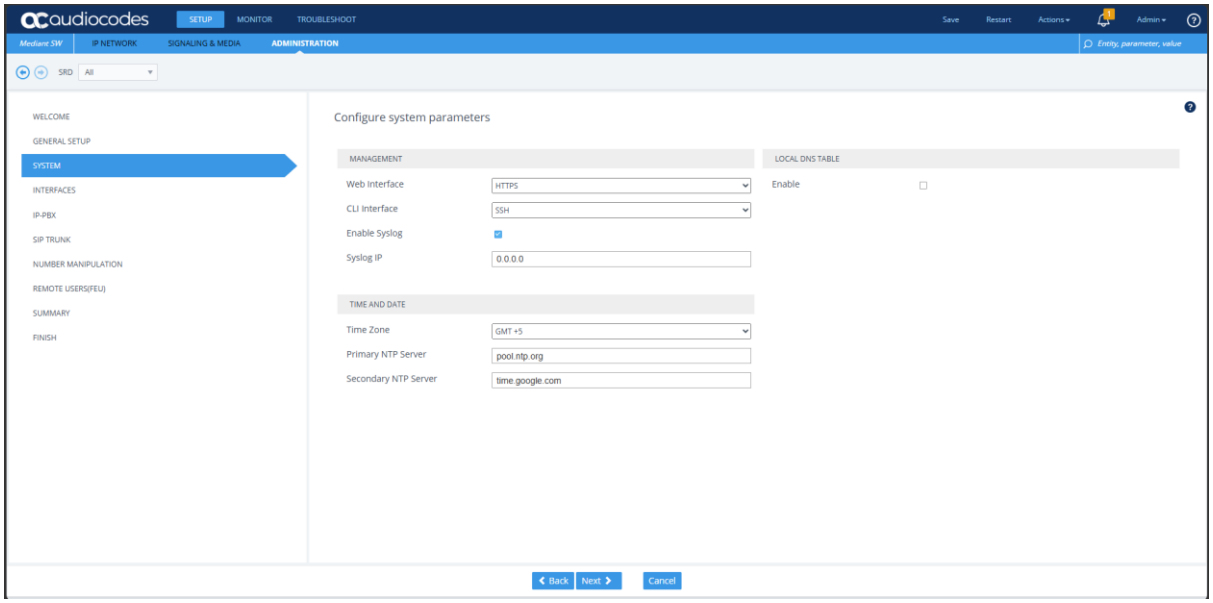
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH
Configure system parameters
MANAGEMENT
Web Interface
HTTPS
CLI Interface
SSH
Enable Syslog
Syslog IP
0.0.0.0
LOCAL DNS TABLE
Enable
TIME AND DATE
Time Zone
GMT +5
Primary NTP Server
pool.ntp.org
Secondary NTP Server
time.google.com
Back
Next
Cancel

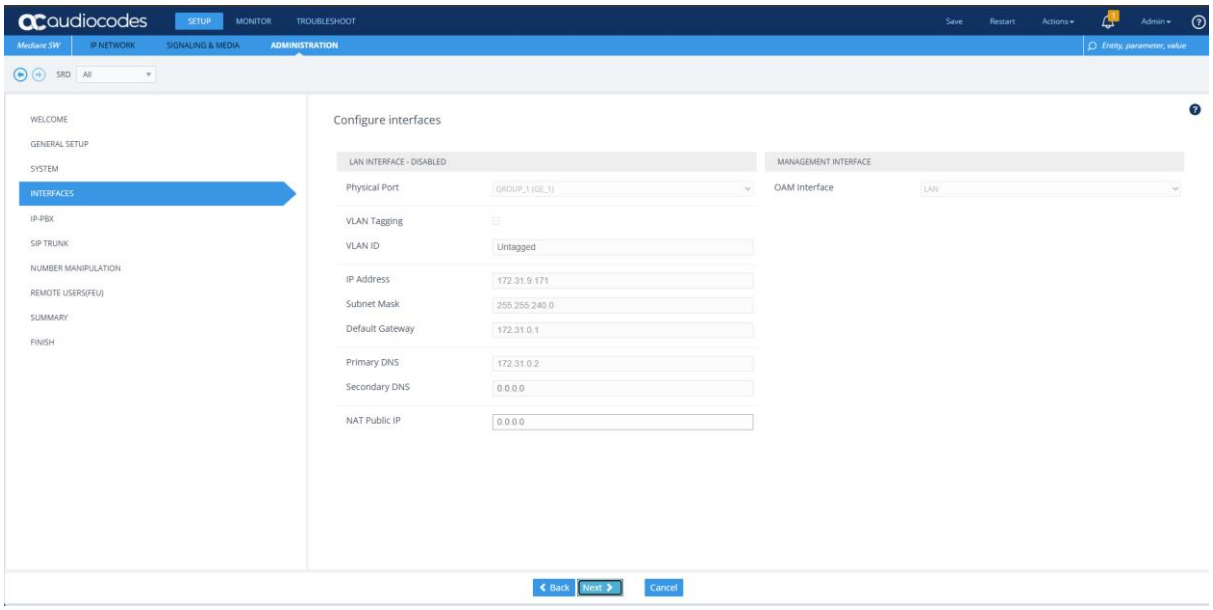
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH
Configure interfaces
LAN INTERFACE - DISABLED
Physical Port
GROUP_1 (GE_1)
VLAN Tagging
VLAN ID
Untagged
IP Address
172.31.9.171
Subnet Mask
255.255.240.0
Default Gateway
172.31.0.1
Primary DNS
172.31.0.2
Secondary DNS
0.0.0.0
NAT Public IP
0.0.0.0
MANAGEMENT INTERFACE
OAM Interface
LAN
Back
Next
Cancel

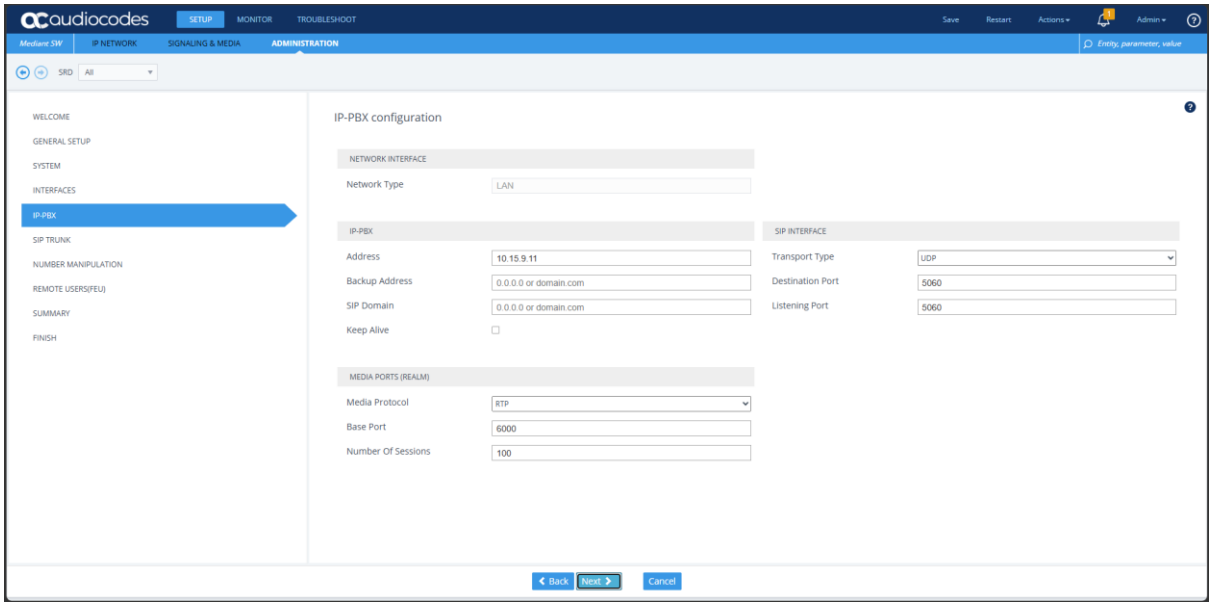
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH
IP-PBX configuration
NETWORK INTERFACE
Network Type
LAN
IP-PBX
Address
10.15.9.11
Backup Address
0.0.0.0 or domain.com
SIP Domain
0.0.0.0 or domain.com
Keep Alive
SIP INTERFACE
Transport Type
UDP
Destination Port
5060
Listening Port
5060
MEDIA PORTS (REALM)
Media Protocol
RTP
Base Port
6000
Number Of Sessions
100
Back
Next
Cancel

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Mediant SW IP NETWORK SIGNALING & MEDIA ADMINISTRATION Entity, parameter, value

SRD All

WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH

SIP Trunk configuration

NETWORK INTERFACE		NAT	
Network Type	LAN	NAT Public IP	

SIP TRUNK		SIP INTERFACE	
Address	213.148.136.2	Transport Type	UDP
Backup Address	0.0.0.0 or domain.com	Destination Port	5060
SIP Domain	0.0.0.0 or domain.com	Listening Port	5060
Keep Alive	☐		

SIP ACCOUNT		MEDIA PORTS (REALM)	
Account Type	None	Media Protocol	RTP
Trunk Main Line		Base Port	7000
Username		Number Of Sessions	100
Password			

Back Next Cancel

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Mediant SW IP NETWORK SIGNALING & MEDIA ADMINISTRATION Entity, parameter, value

SRD All

WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH

Number Manipulation configuration

OUTBOUND CALLS (IP-PBX → SIP TRUNK)		INBOUND CALLS (SIP TRUNK → IP-PBX)	
Destination Number Manipulation	☑	Destination Number Manipulation	☑
Prefix	+972	Prefix	0
Remove	4	Remove	1
Add	0	Add	+972
Source Number Manipulation	☐	Source Number Manipulation	☐

ADVANCED ROUTING MANAGER	
Use ARM for call routing	☐

Back Next Cancel

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Mediant SW IP NETWORK SIGNALING & MEDIA ADMINISTRATION Entity, parameter, value

SRD All

WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH

Remote Users configuration

REMOTE USERS

Enable remote users

Back Next Cancel

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Mediant SW IP NETWORK SIGNALING & MEDIA ADMINISTRATION Entity, parameter, value

SRD All

WELCOME
GENERAL SETUP
SYSTEM
INTERFACES
IP-PBX
SIP TRUNK
NUMBER MANIPULATION
REMOTE USERS(FEU)
SUMMARY
FINISH

IP-PBX: Generic IP-PBX
SIP-Trunk: Generic SIP Trunk

System
Web Interface: HTTPS
CLI Interface: SSH
Syslog IP: 0.0.0.0
Primary NTP Server: pool.ntp.org
Secondary NTP Server: time.google.com

Interfaces
Physical Port: GROUP_1 (GE_1)
OAM Interface: LAN
VLAN Tagging: No
IP Address: 172.31.9.171
Subnet Mask: 255.255.240.0
Default Gateway: 172.31.0.1
Primary DNS: 172.31.0.2

IP-PBX
Media Protocol: RTP
Transport Type: UDP
Network Type: LAN
Address: 10.15.9.11
Keep Alive: No
Base Port: 6000
Number Of Sessions: 100
Destination Port: 5060
Listening Port: 5060

SIP Trunk
Transport Type: UDP
Media Protocol: RTP
Network Type: LAN
Address: 213.148.136.2
Keep Alive: No
Destination Port: 5060
Listening Port: 5060
Base Port: 7000
Number Of Sessions: 100
Account Type: None

Number Manipulation
Destination Number Manipulation: Yes
Source Number Manipulation: No
Use ARM for call routing: No
Destination Number Manipulation: Yes

Back Next Save INI file Cancel

audiocodes SETUP MONITOR TROUBLESHOOT Save Restart Actions Admin

Mediant SW IP NETWORK SIGNALING & MEDIA ADMINISTRATION Entity, parameter, value

SRD All

TIME & DATE

WEB & CLI
- **Local Users (1)**
- **Local Users Settings**
- Authentication Server
- Login OAuth Servers (0)
- **Web Settings**
- Web Interfaces (1)
- CLI Settings
- Telnet Interfaces (0)
- SSH Settings
- SSH Interfaces (1)
- CLI Aliases (0)
- Management Access List (0)
- **Active Users**
- Customize Access Level (0)
- Weak Passwords List (6)

SNMP
LICENSE
MAINTENANCE
PERFORMANCE MONITORING

Web Interfaces (1)

+ New Edit | Page 1 of 1 | Show 10 records per page

INDEX	INTERFACE NAME	TLS CONTEXT NAME	HTTPS ONLY	REQUIRE CLIENT CERTIFICATE	HTTP PORT	HTTPS PORT
0	eth0	default	HTTPS only	No	80	443

#0 Edit

GENERAL

Interface Name	eth0	View
HTTP Port	80	
HTTPS Port	443	
TLS Context Name	default	View
Require Client Certificate	No	
HTTPS Only	HTTPS only	

4.2 IP Network Interface(Editable in Config Wizard)

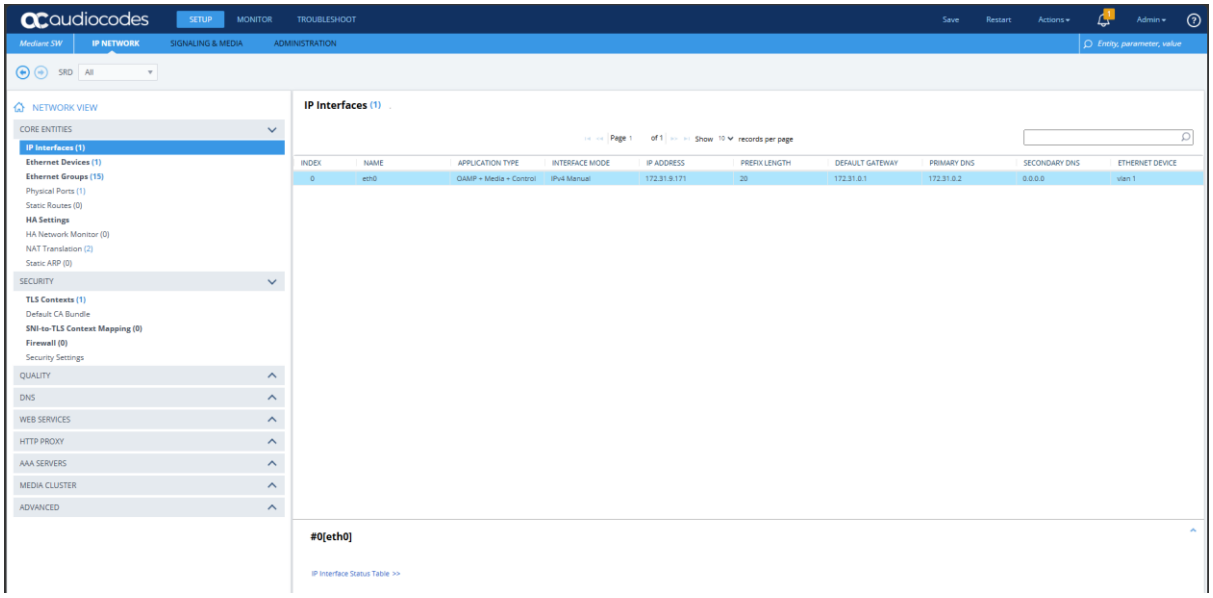

4.3 NAT Translation

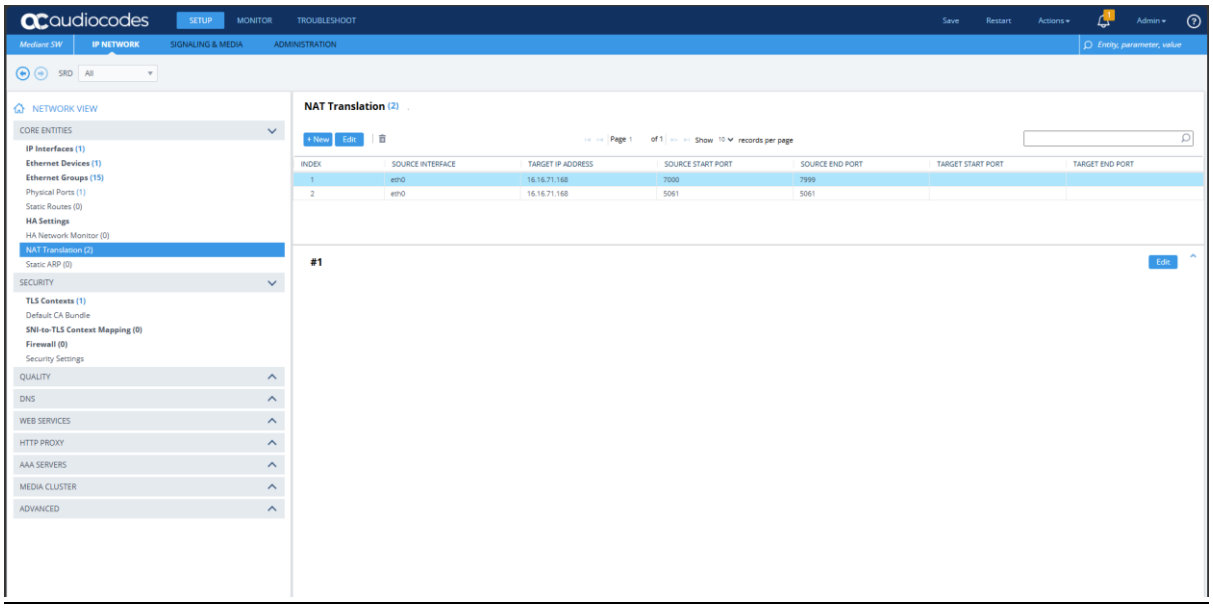

4.4 Upload TLS Certificate

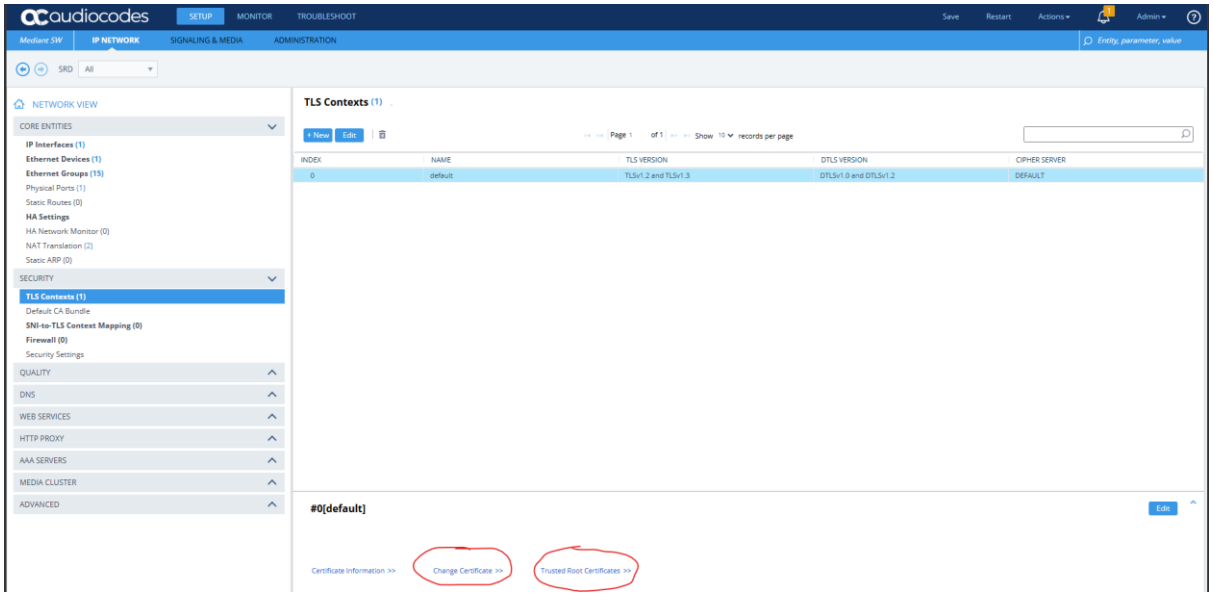

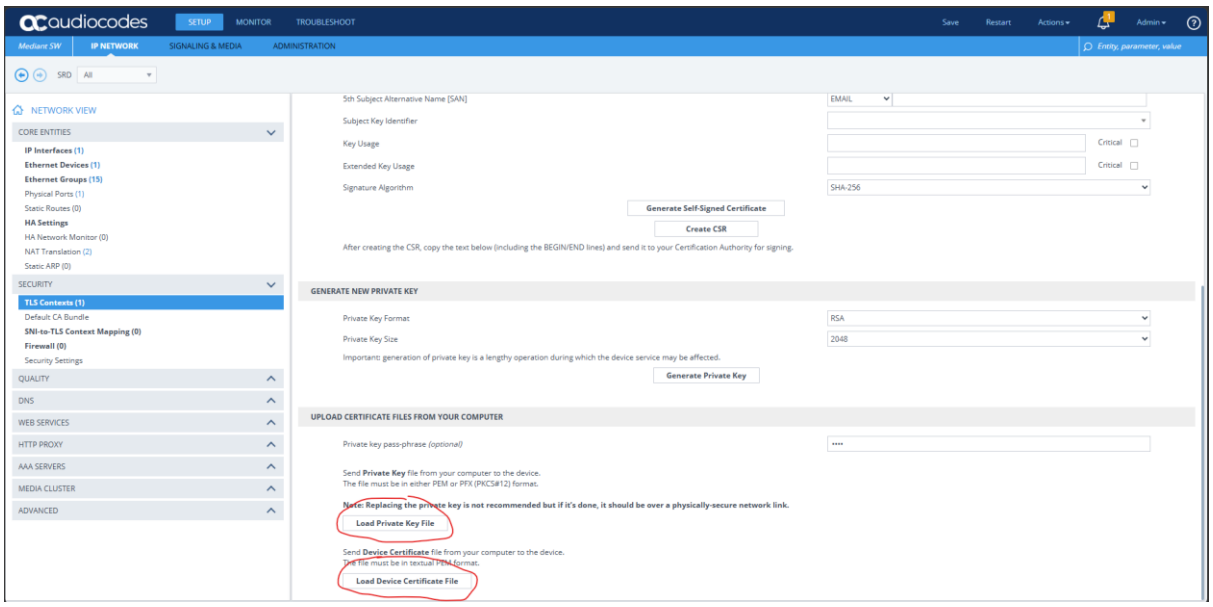

4.5 Transport Settings

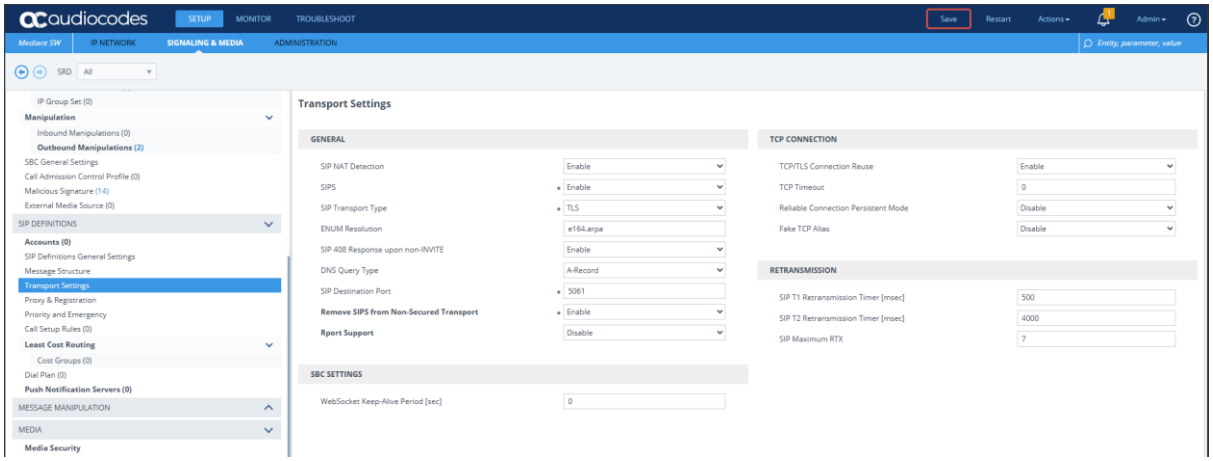

4.6 SIP Interface

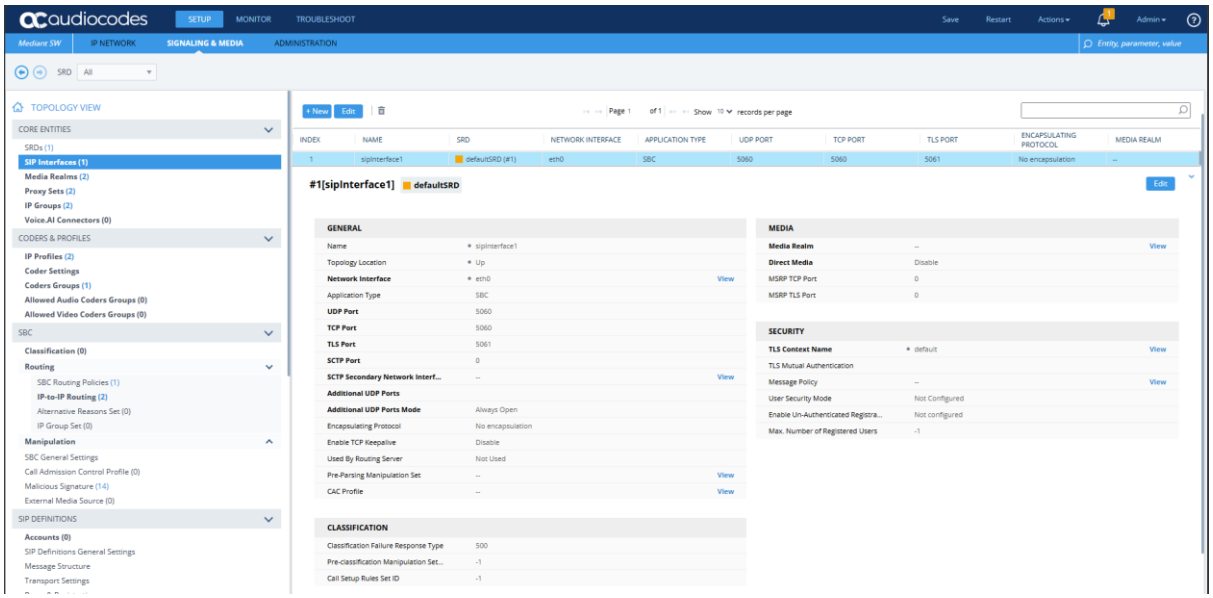

4.7 Proxy Sets

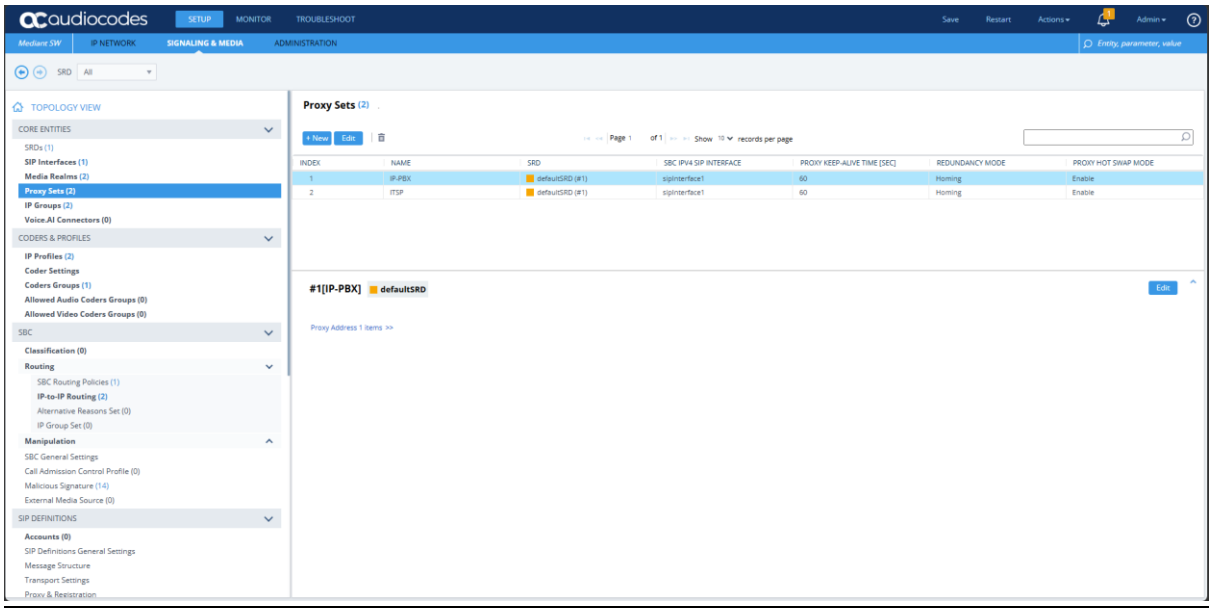

4.8 IP Groups

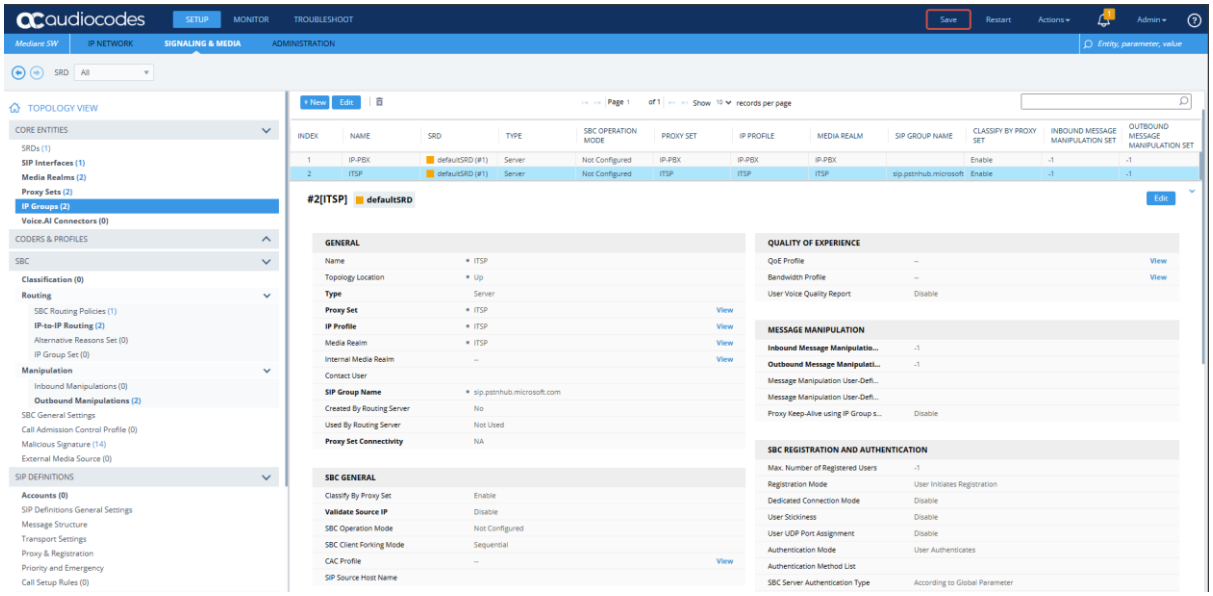
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
TOPOLOGY VIEW
CORE ENTITIES
SRDs (1)
SIP Interfaces (1)
Media Realms (2)
Proxy Sets (2)
IP Groups (2)
Voice.AI Connectors (0)
CODERS & PROFILES
SBC
Classification (0)
Routing
SBC Routing Policies (1)
IP-to-IP Routing (2)
Alternative Reasons Set (0)
IP Group Set (0)
Manipulation
Inbound Manipulations (0)
Outbound Manipulations (2)
SBC General Settings
Call Admission Control Profile (0)
Malicious Signature (14)
External Media Source (0)
SIP DEFINITIONS
Accounts (0)
SIP Definitions General Settings
Message Structure
Transport Settings
Proxy & Registration
Priority and Emergency
Call Setup Rules (0)
+ New
Edit
Page 1 of 1
Show 10 records per page
INDEX
NAME
SRD
TYPE
SBC OPERATION MODE
PROXY SET
IP PROFILE
MEDIA REALM
SIP GROUP NAME
CLASSIFY BY PROXY SET
INBOUND MESSAGE MANIPULATION SET
OUTBOUND MESSAGE MANIPULATION SET
1 IP-PBX defaultSRD (#1) Server Not Configured IP-PBX IP-PBX IP-PBX Enable -1 -1
2 ITSP defaultSRD (#1) Server Not Configured ITSP ITSP ITSP sip.pstnhub.microsoft Enable -1 -1
#2[ITSP] defaultSRD
Edit
GENERAL
Name ITSP
Topology Location Up
Type Server
Proxy Set ITSP View
IP Profile ITSP View
Media Realm ITSP View
Internal Media Realm View
Contact User
SIP Group Name sip.pstnhub.microsoft.com
Created By Routing Server No
Used By Routing Server Not Used
Proxy Set Connectivity NA
SBC GENERAL
Classify By Proxy Set Enable
Validate Source IP Disable
SBC Operation Mode Not Configured
SBC Client Forking Mode Sequential
CAC Profile View
SIP Source Host Name
QUALITY OF EXPERIENCE
QoE Profile View
Bandwidth Profile View
User Voice Quality Report Disable
MESSAGE MANIPULATION
Inbound Message Manipulatio... -1
Outbound Message Manipulati... -1
Message Manipulation User-Defi...
Message Manipulation User-Defi...
Proxy Keep-Alive using IP Group s... Disable
SBC REGISTRATION AND AUTHENTICATION
Max. Number of Registered Users -1
Registration Mode User Initiates Registration
Dedicated Connection Mode Disable
User Stickiness Disable
User UDP Port Assignment Disable
Authentication Mode User Authenticates
Authentication Method List
SBC Server Authentication Type According to Global Parameter

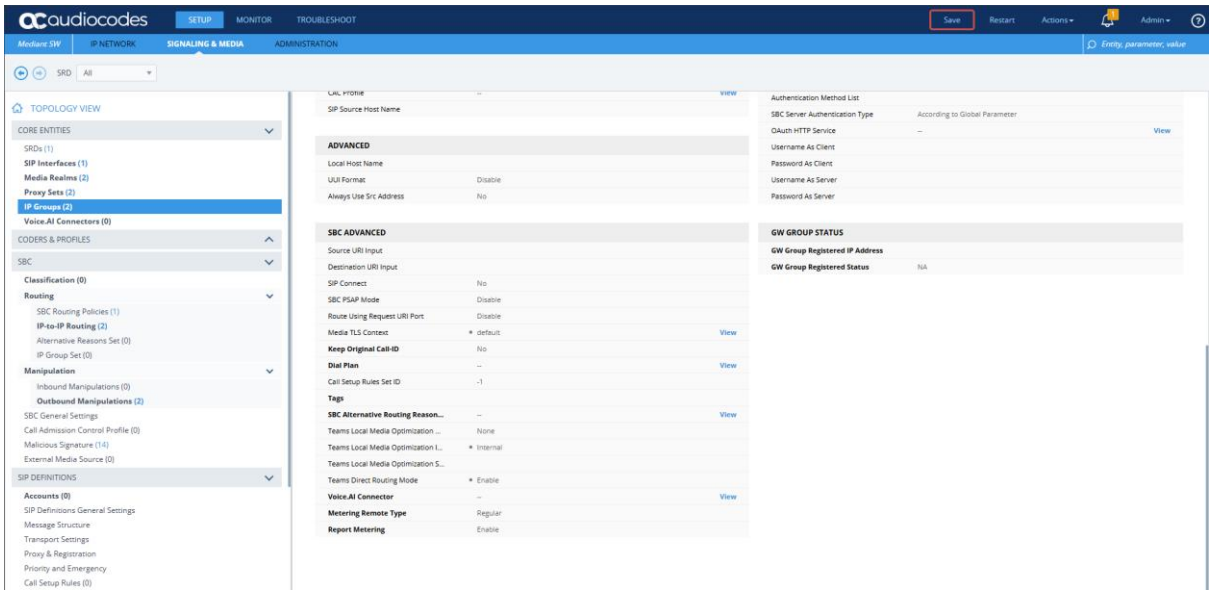
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
TOPOLOGY VIEW
CORE ENTITIES
SRDs (1)
SIP Interfaces (1)
Media Realms (2)
Proxy Sets (2)
IP Groups (2)
Voice.AI Connectors (0)
CODERS & PROFILES
SBC
Classification (0)
Routing
SBC Routing Policies (1)
IP-to-IP Routing (2)
Alternative Reasons Set (0)
IP Group Set (0)
Manipulation
Inbound Manipulations (0)
Outbound Manipulations (2)
SBC General Settings
Call Admission Control Profile (0)
Malicious Signature (14)
External Media Source (0)
SIP DEFINITIONS
Accounts (0)
SIP Definitions General Settings
Message Structure
Transport Settings
Proxy & Registration
Priority and Emergency
Call Setup Rules (0)
SIP Source Host Name
ADVANCED
Local Host Name
UUI Format Disable
Always Use Src Address No
SBC ADVANCED
Source URI Input
Destination URI Input
SIP Connect No
SBC PSAP Mode Disable
Route Using Request URI Port Disable
Media TLS Context default View
Keep Original Call-ID No
Dial Plan View
Call Setup Rules Set ID -1
Tags
SBC Alternative Routing Reason... View
Teams Local Media Optimization ... None
Teams Local Media Optimization I... Internal
Teams Local Media Optimization S...
Teams Direct Routing Mode Enable
Voice.AI Connector View
Metering Remote Type Regular
Report Metering Enable
Authentication Method List
SBC Server Authentication Type According to Global Parameter
OAuth HTTP Service View
Username As Client
Password As Client
Username As Server
Password As Server
GW GROUP STATUS
GW Group Registered IP Address
GW Group Registered Status NA

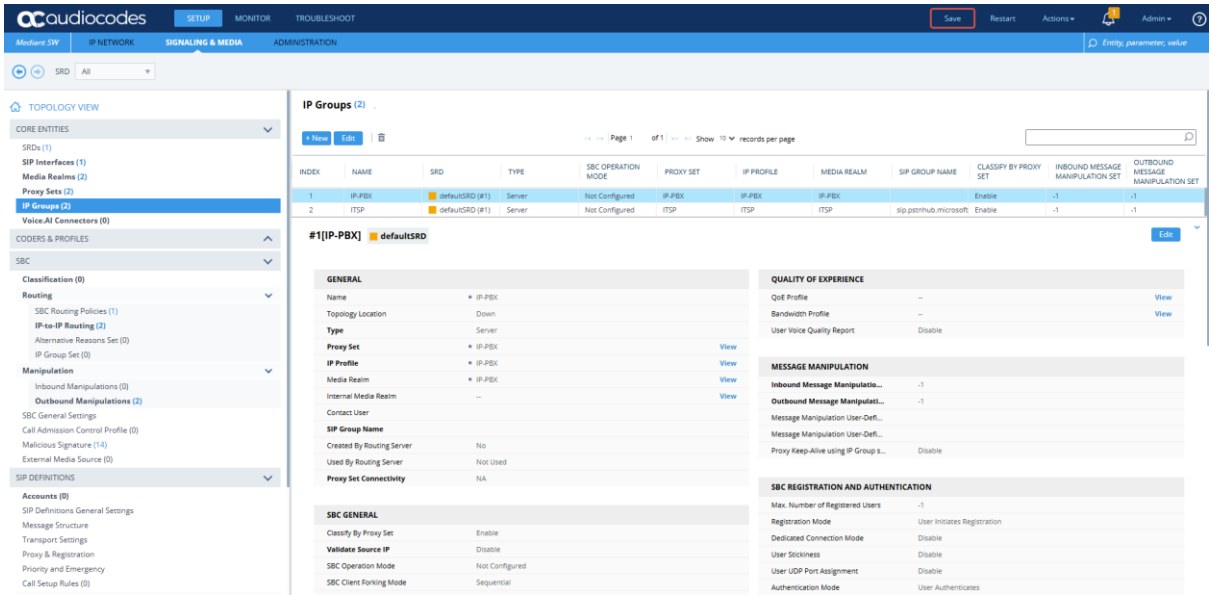

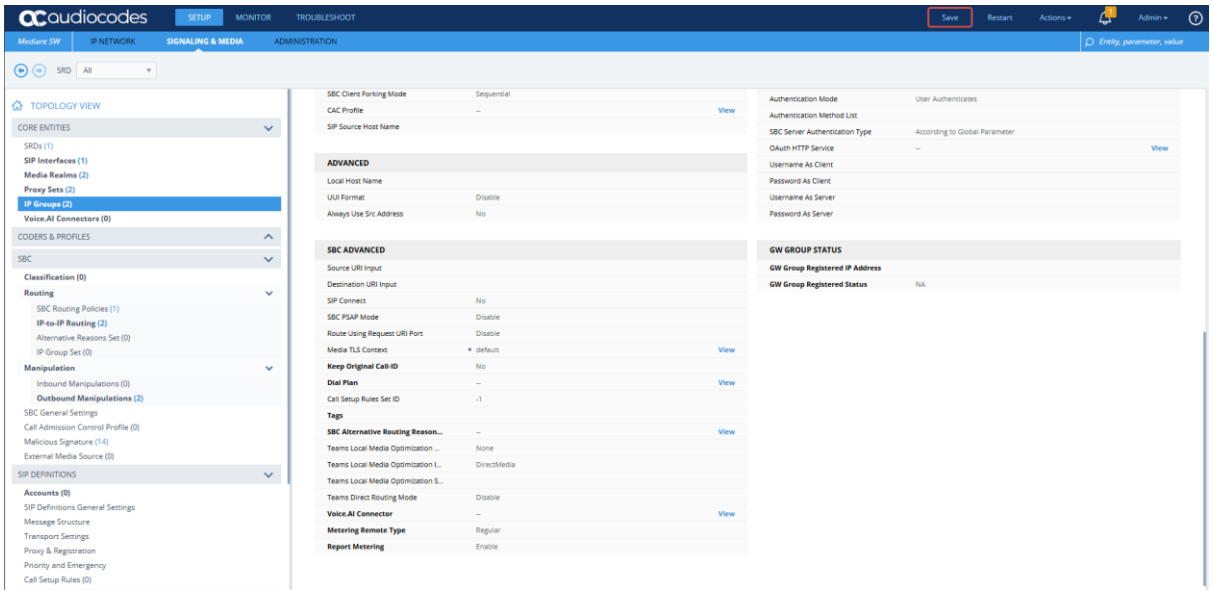

4.9 IP-to-IP Routing

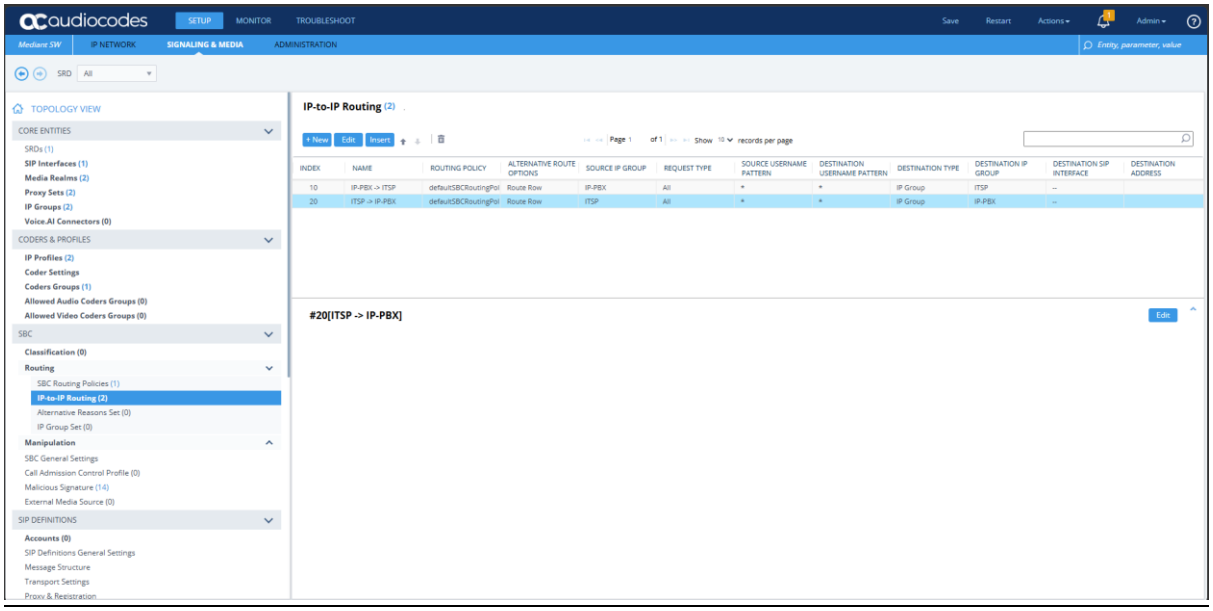

4.10 Media Security

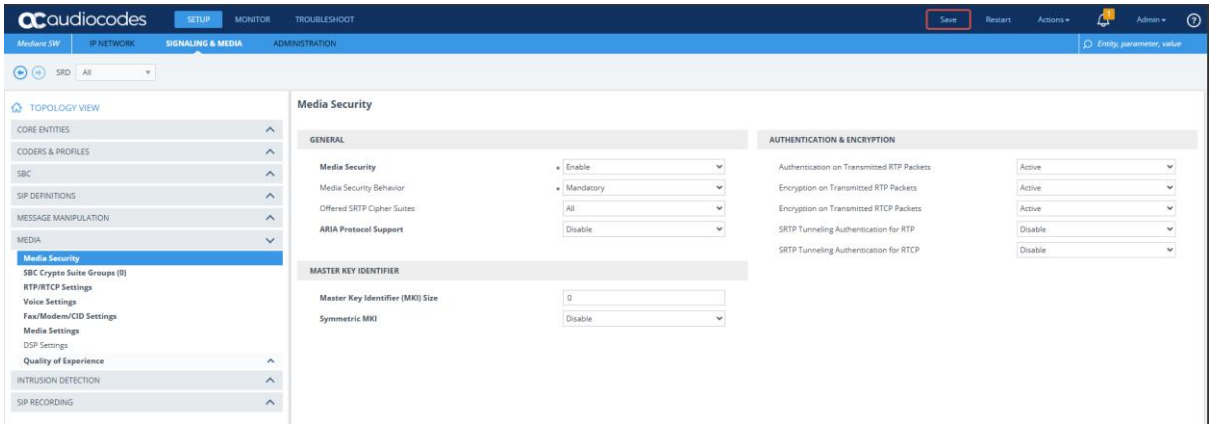

Additional(Number Manipulation)

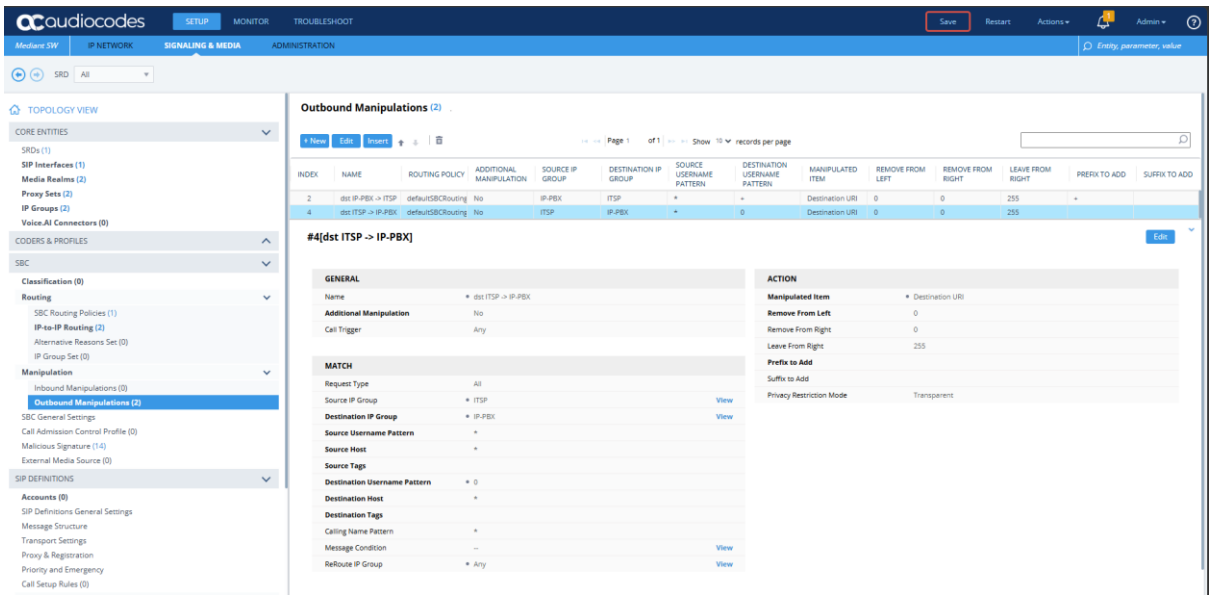

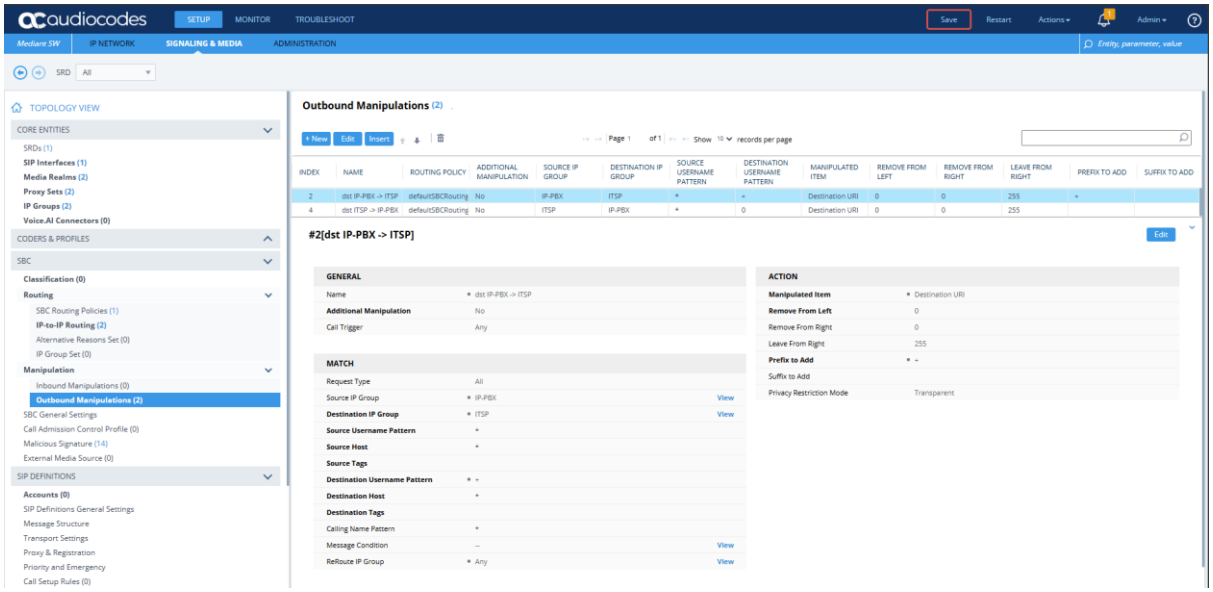
audiocodes
SETUP
MONITOR
TROUBLESHOOT
Save
Restart
Actions
Admin
Mediant SW
IP NETWORK
SIGNALING & MEDIA
ADMINISTRATION
Entity, parameter, value
SRD
All
TOPOLOGY VIEW
CORE ENTITIES
SRDs (1)
SIP Interfaces (1)
Media Realms (2)
Proxy Sets (2)
IP Groups (2)
Voice.AI Connectors (0)
CODERS & PROFILES
SBC
Classification (0)
Routing
SBC Routing Policies (1)
IP-to-IP Routing (2)
Alternative Reasons Set (0)
IP Group Set (0)
Manipulation
Inbound Manipulations (0)
Outbound Manipulations (2)
SBC General Settings
Call Admission Control Profile (0)
Malicious Signature (14)
External Media Source (0)
SIP DEFINITIONS
Accounts (0)
SIP Definitions General Settings
Message Structure
Transport Settings
Proxy & Registration
Priority and Emergency
Call Setup Rules (0)
Outbound Manipulations (2)
+ New
Edit
Insert
Page 1 of 1
Show 10 records per page
INDEX
NAME
ROUTING POLICY
ADDITIONAL MANIPULATION
SOURCE IP GROUP
DESTINATION IP GROUP
SOURCE USERNAME PATTERN
DESTINATION USERNAME PATTERN
MANIPULATED ITEM
REMOVE FROM LEFT
REMOVE FROM RIGHT
LEAVE FROM RIGHT
PREFIX TO ADD
SUFFIX TO ADD
2 dst IP-PBX -> ITSP defaultSBCRouting No IP-PBX ITSP * * Destination URI 0 0 255 *
4 dst ITSP -> IP-PBX defaultSBCRouting No ITSP IP-PBX * 0 Destination URI 0 0 255
#2[dst IP-PBX -> ITSP]
Edit
GENERAL
Name * dst IP-PBX -> ITSP
Additional Manipulation No
Call Trigger Any
MATCH
Request Type All
Source IP Group * IP-PBX View
Destination IP Group * ITSP View
Source Username Pattern *
Source Host *
Source Tags
Destination Username Pattern * *
Destination Host *
Destination Tags
Calling Name Pattern *
Message Condition -- View
ReRoute IP Group * Any View
ACTION
Manipulated Item * Destination URI
Remove From Left 0
Remove From Right 0
Leave From Right 255
Prefix to Add * -
Suffix to Add
Privacy Restriction Mode Transparent