


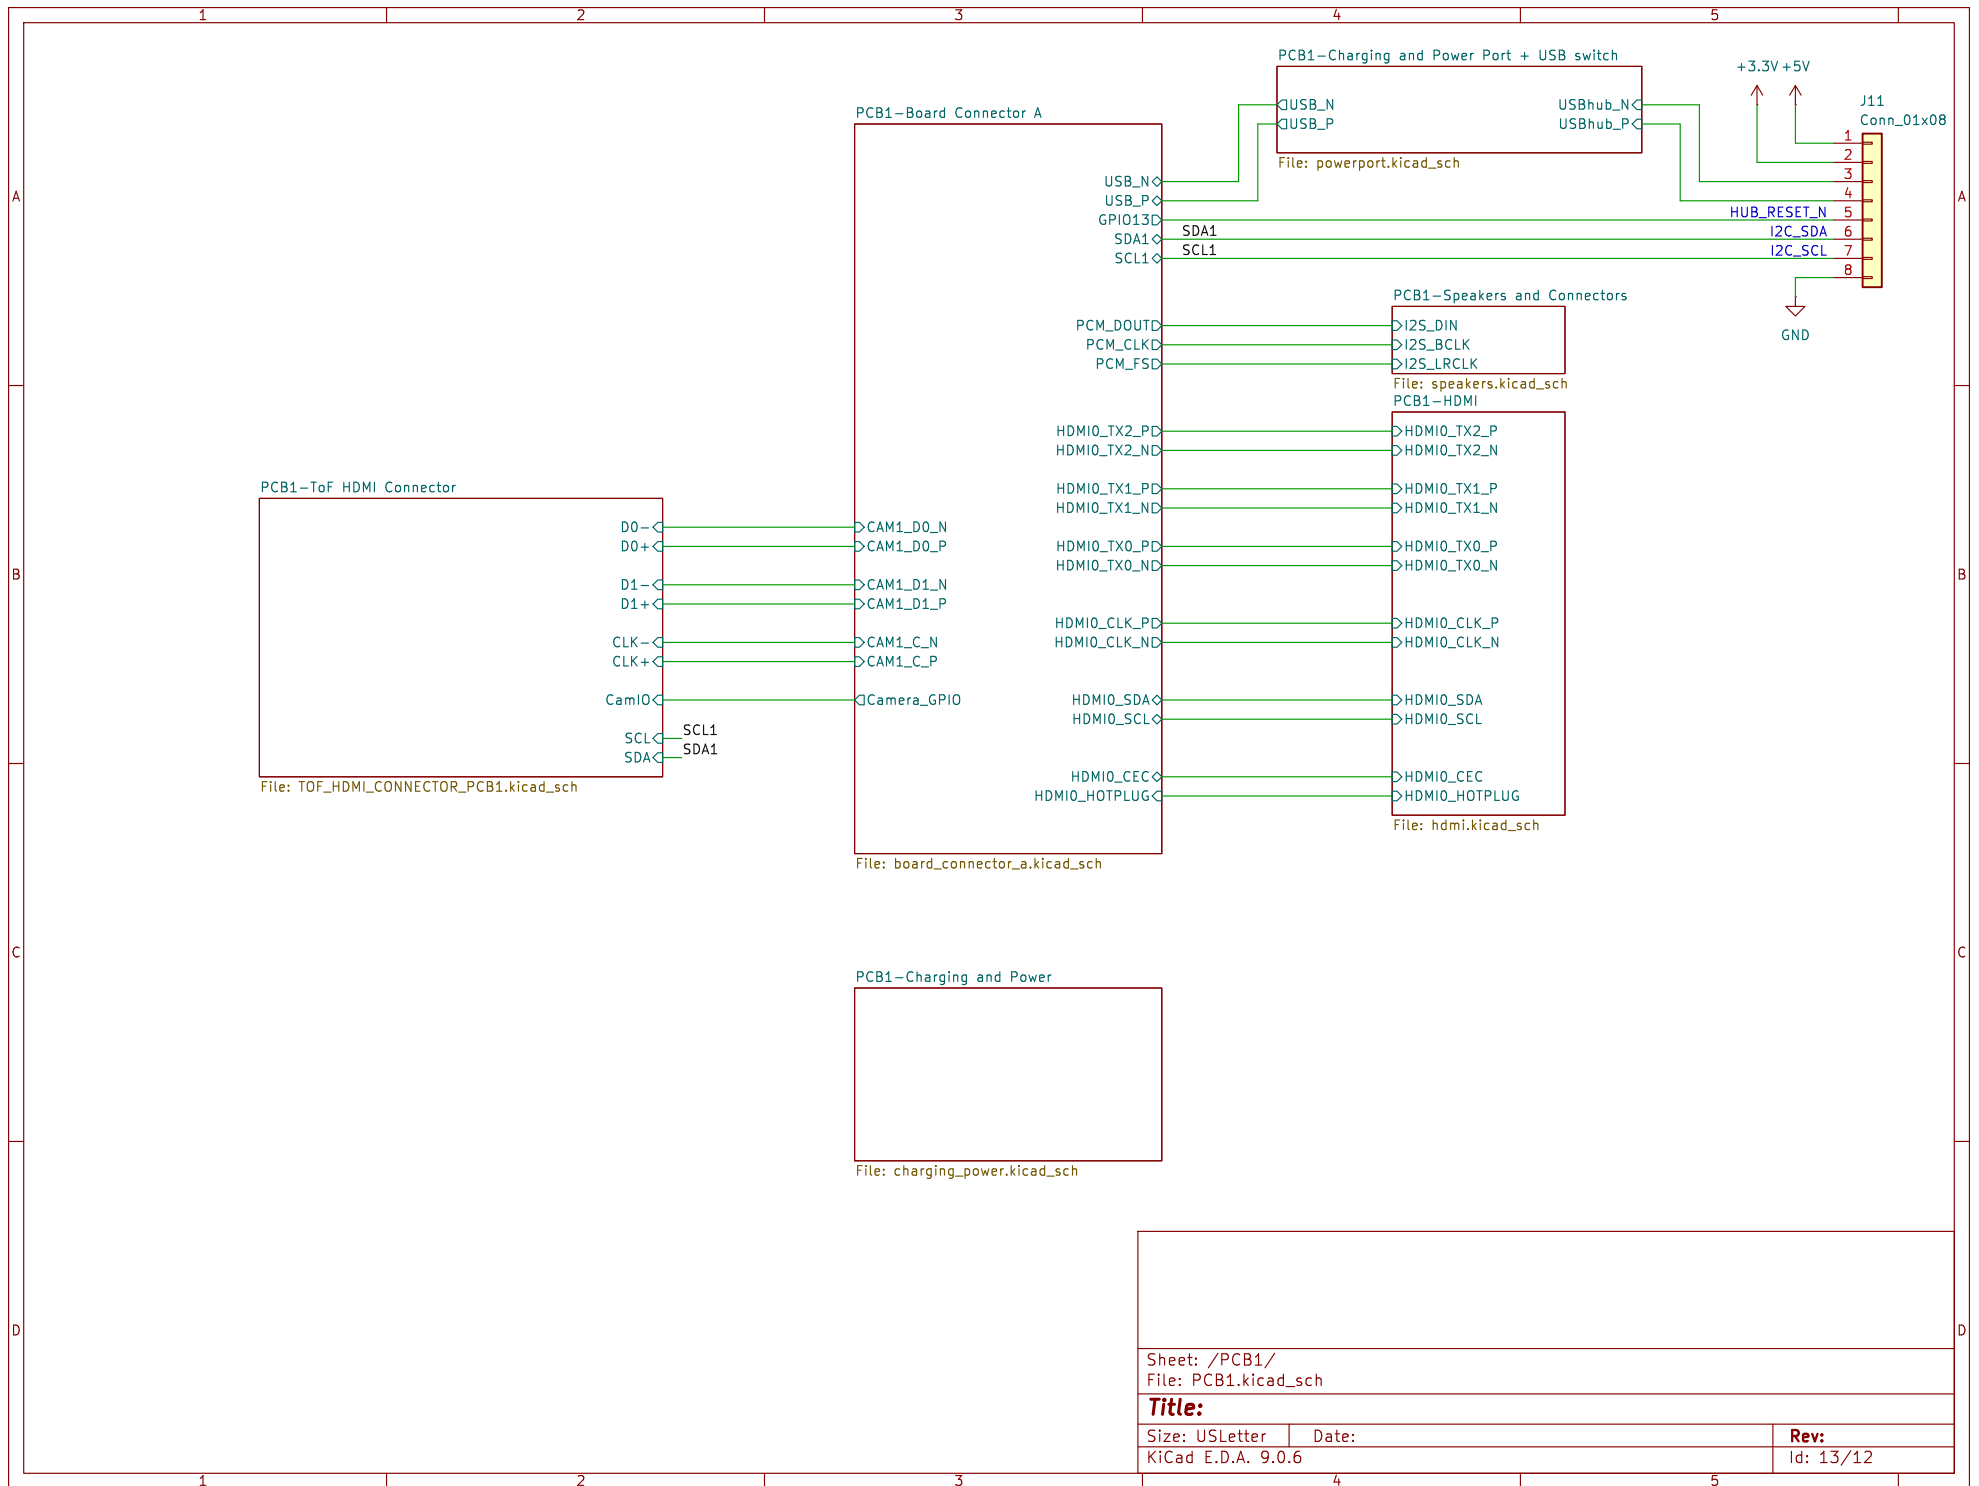


Sheet: /PCB1/
File: PCB1.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 9.0.6

Rev:
Id: 13/12

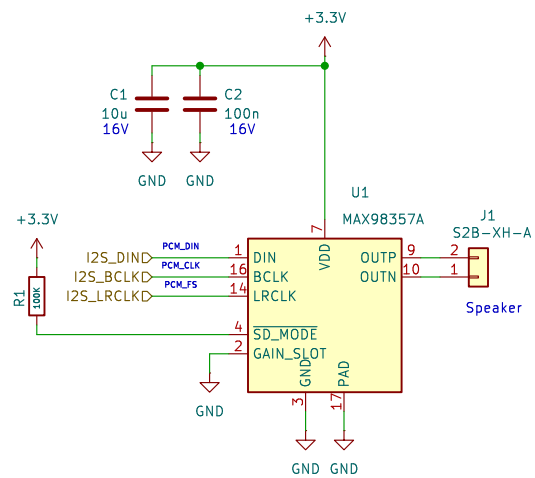


Sheet: /PCB1/PCB1-Speakers and Connectors/
File: speakers.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 9.0.6

Rev:
Id: 2/12

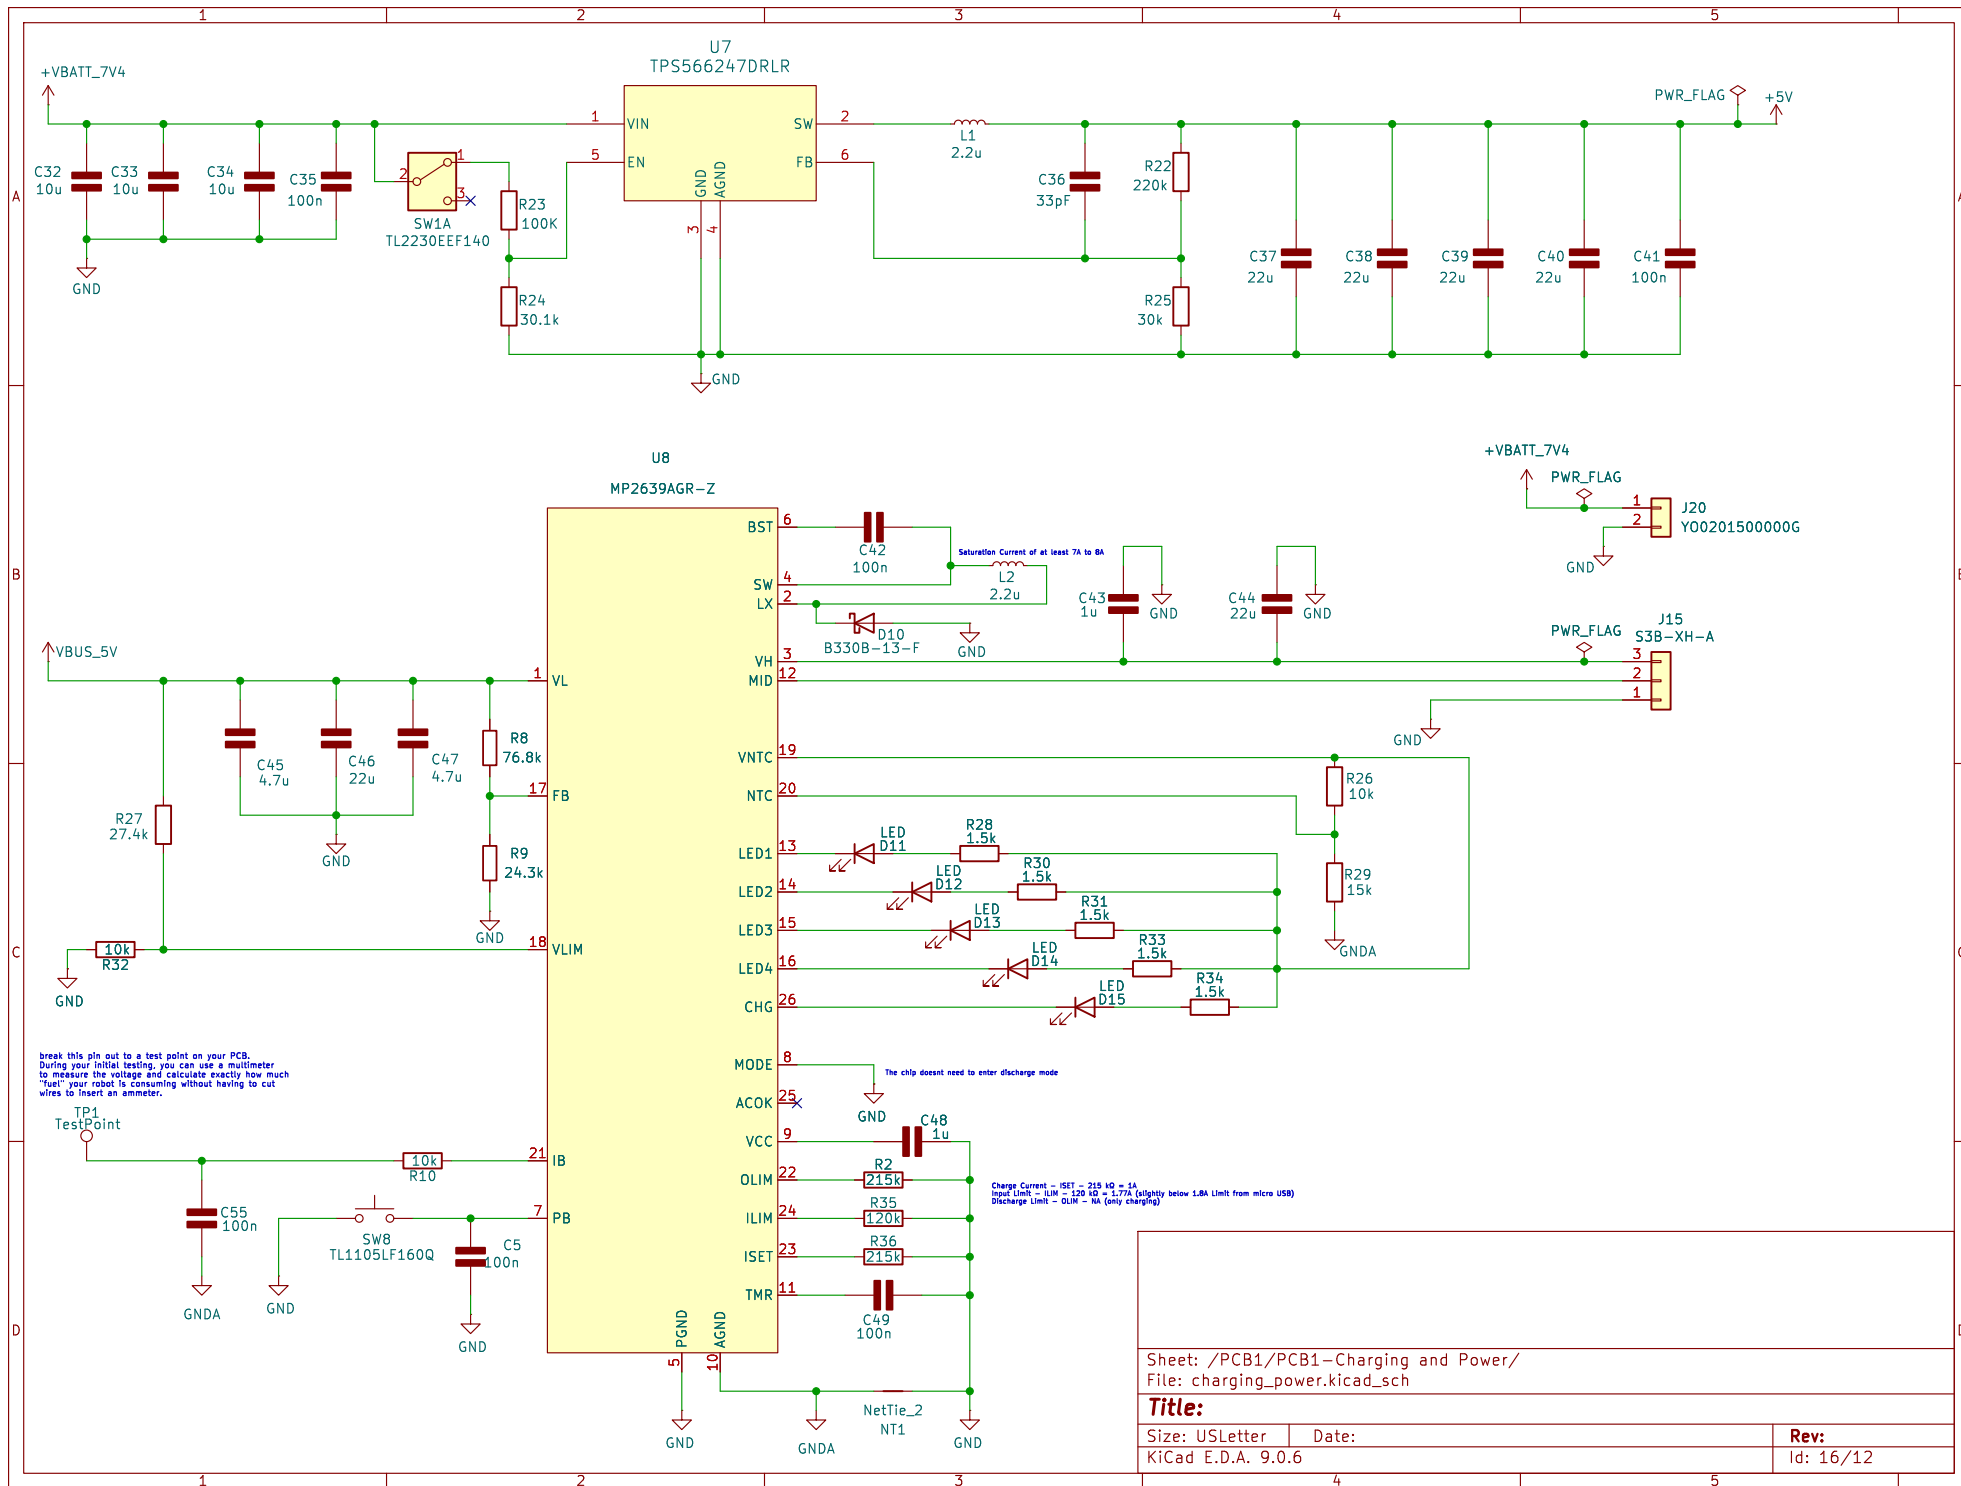


For Cameras (Host Mode): force the CM4 to be a Host using software. Add this line to config.txt file after flashing the OS:
dtoverlay=dwc2,dr_mode=host


For Cameras (Host Mode): force the CM4 to be a Host using software. Add this line to config.txt file after flashing the OS:
dtoverlay=dwc2,dr_mode=host




Size: USLetter	Date:
KiCad E.D.A. 9.0.6	


Rev:
Id: 18/12

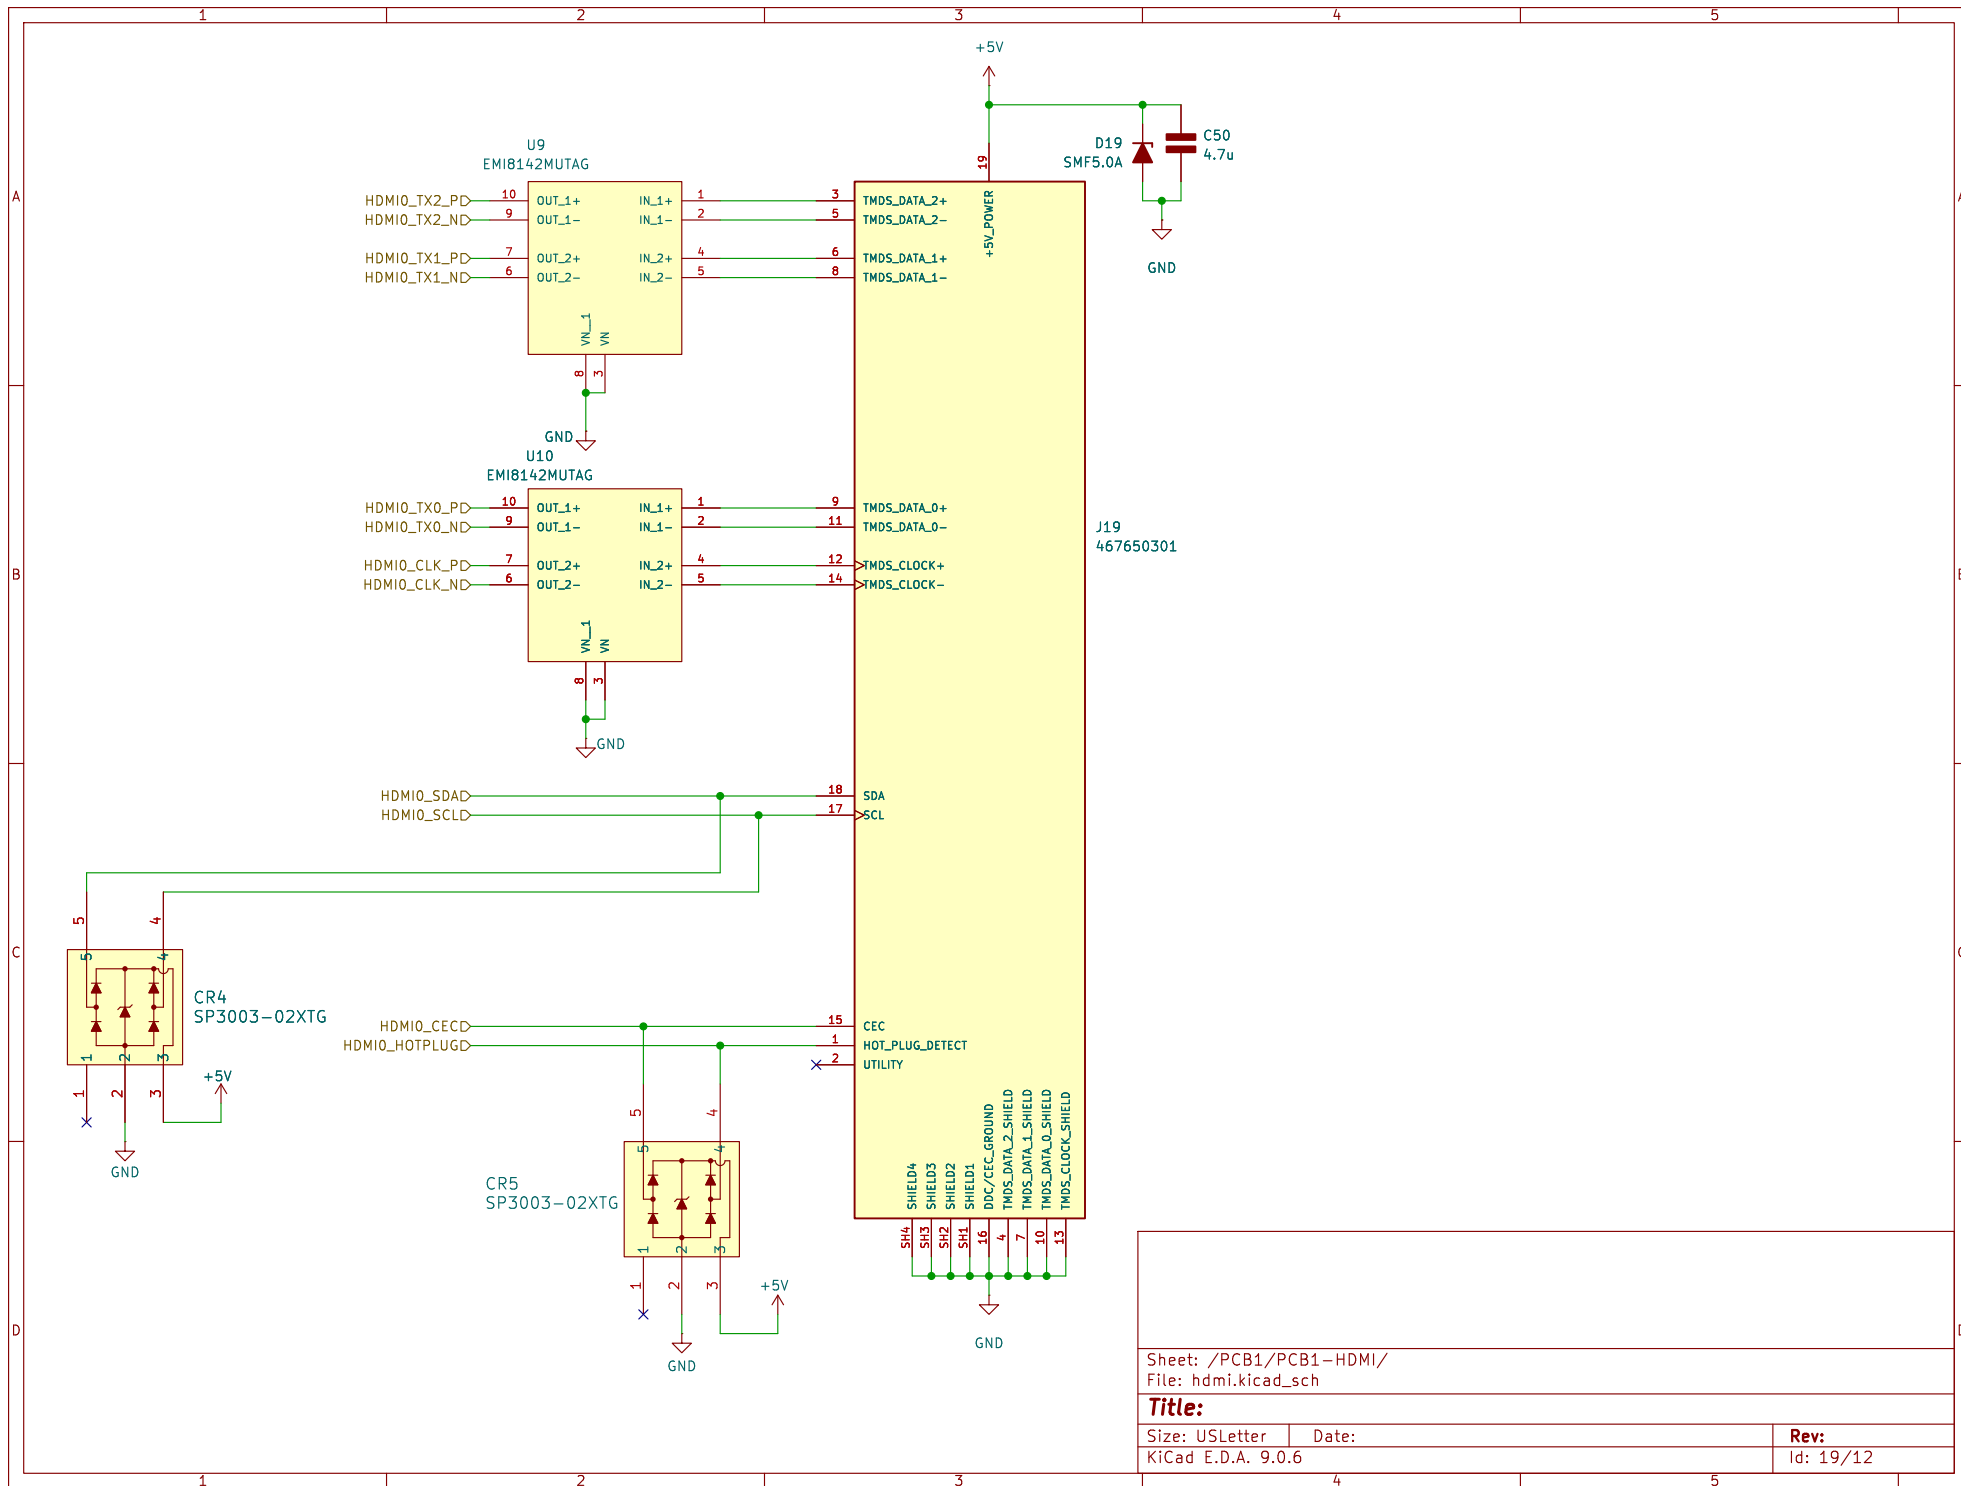

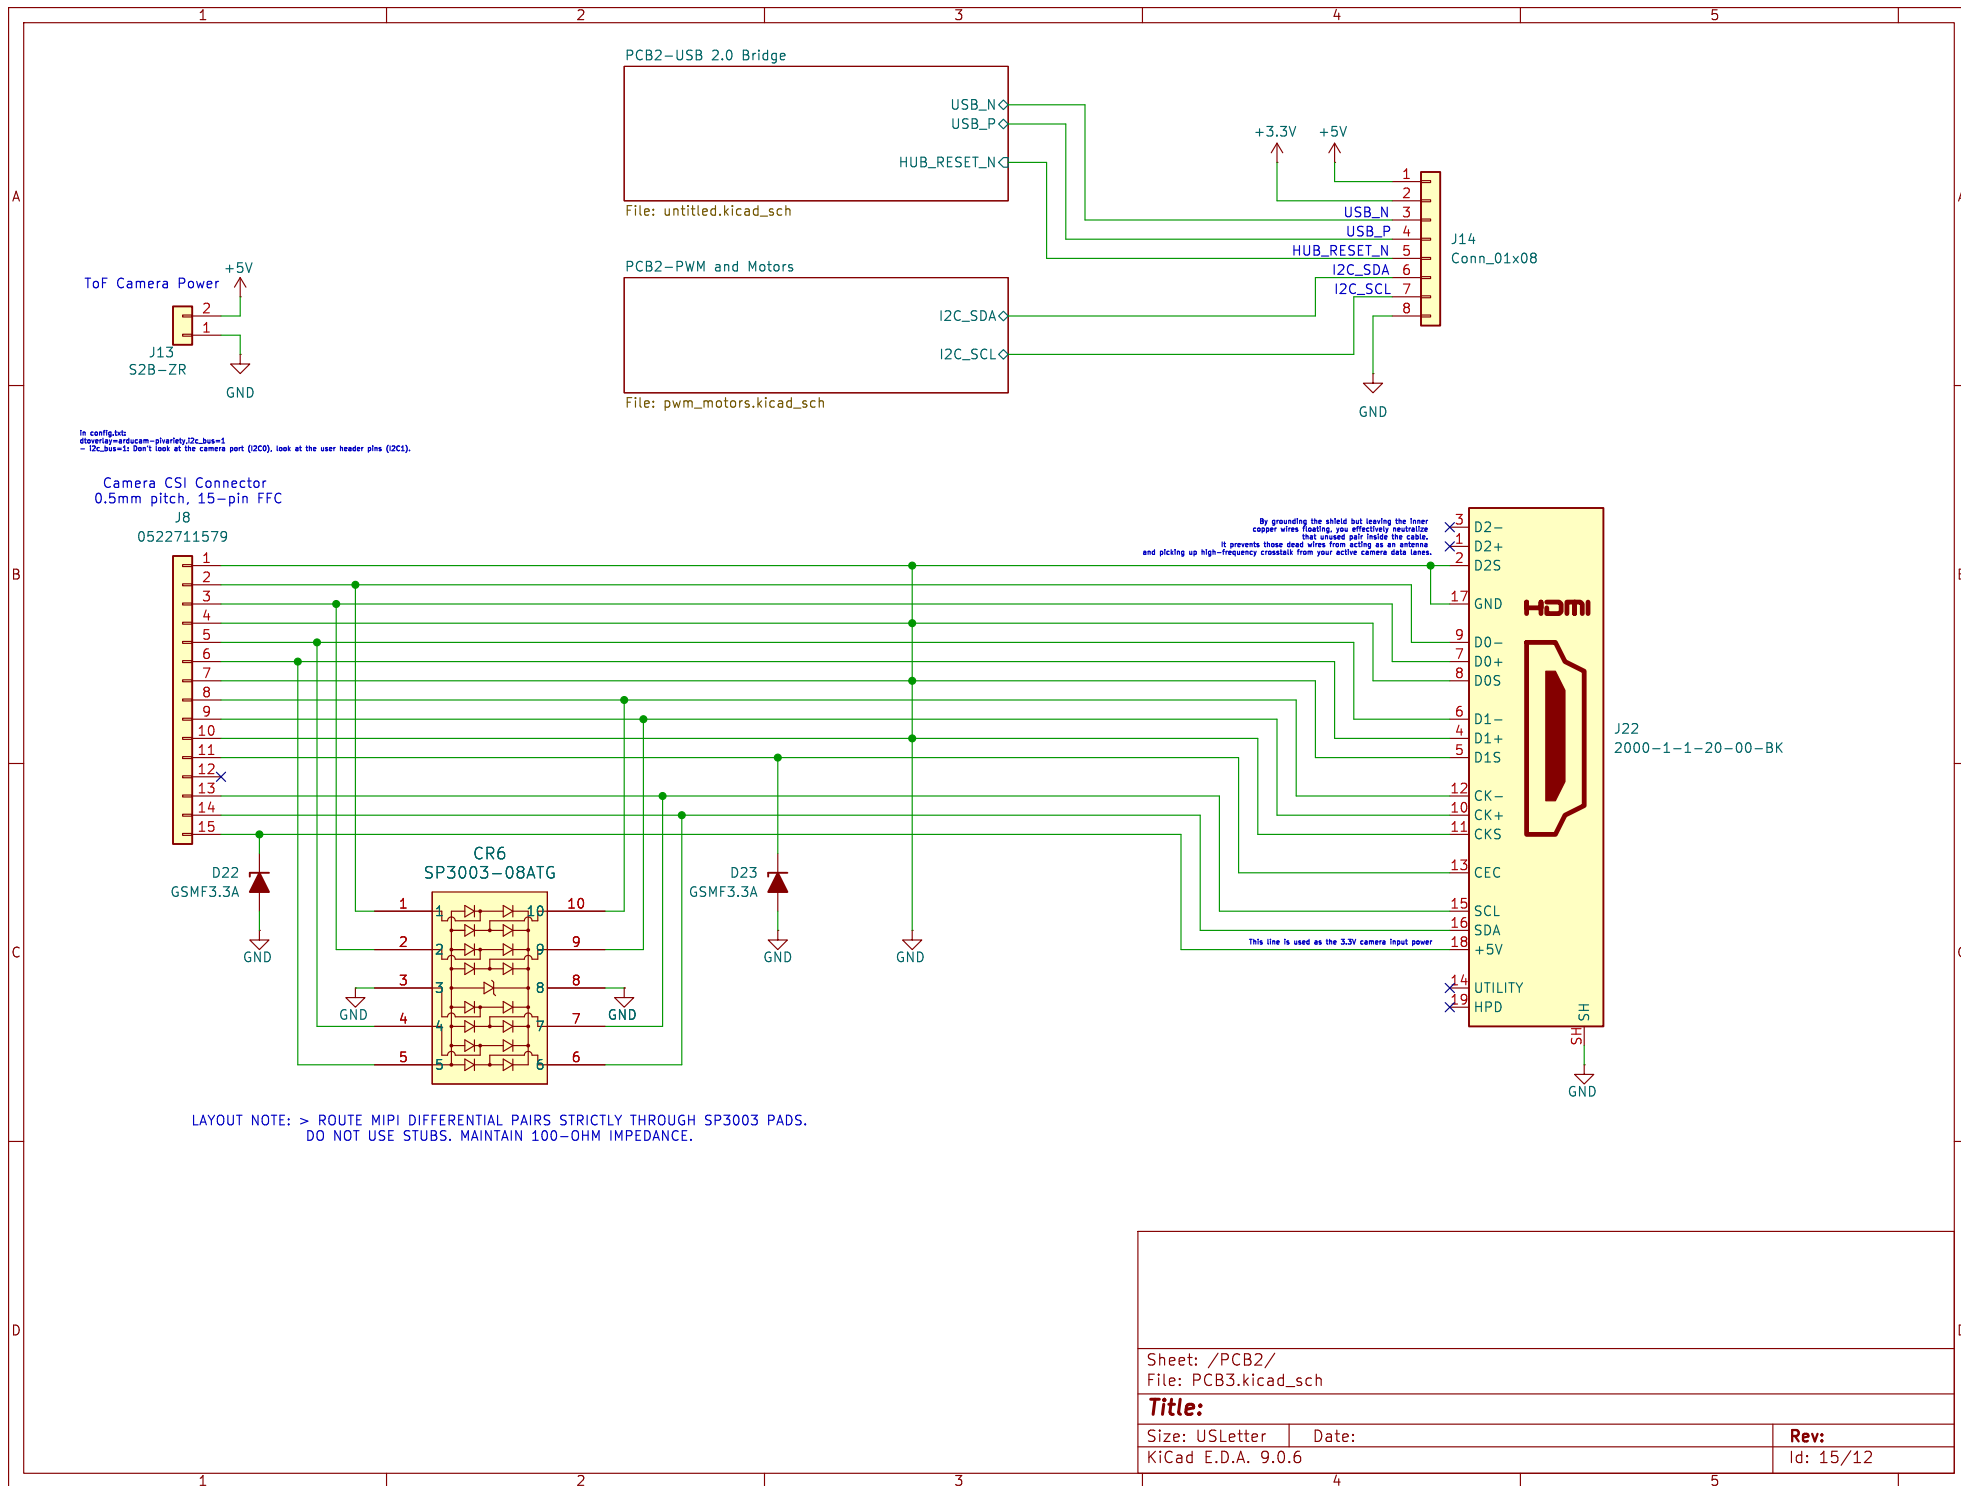


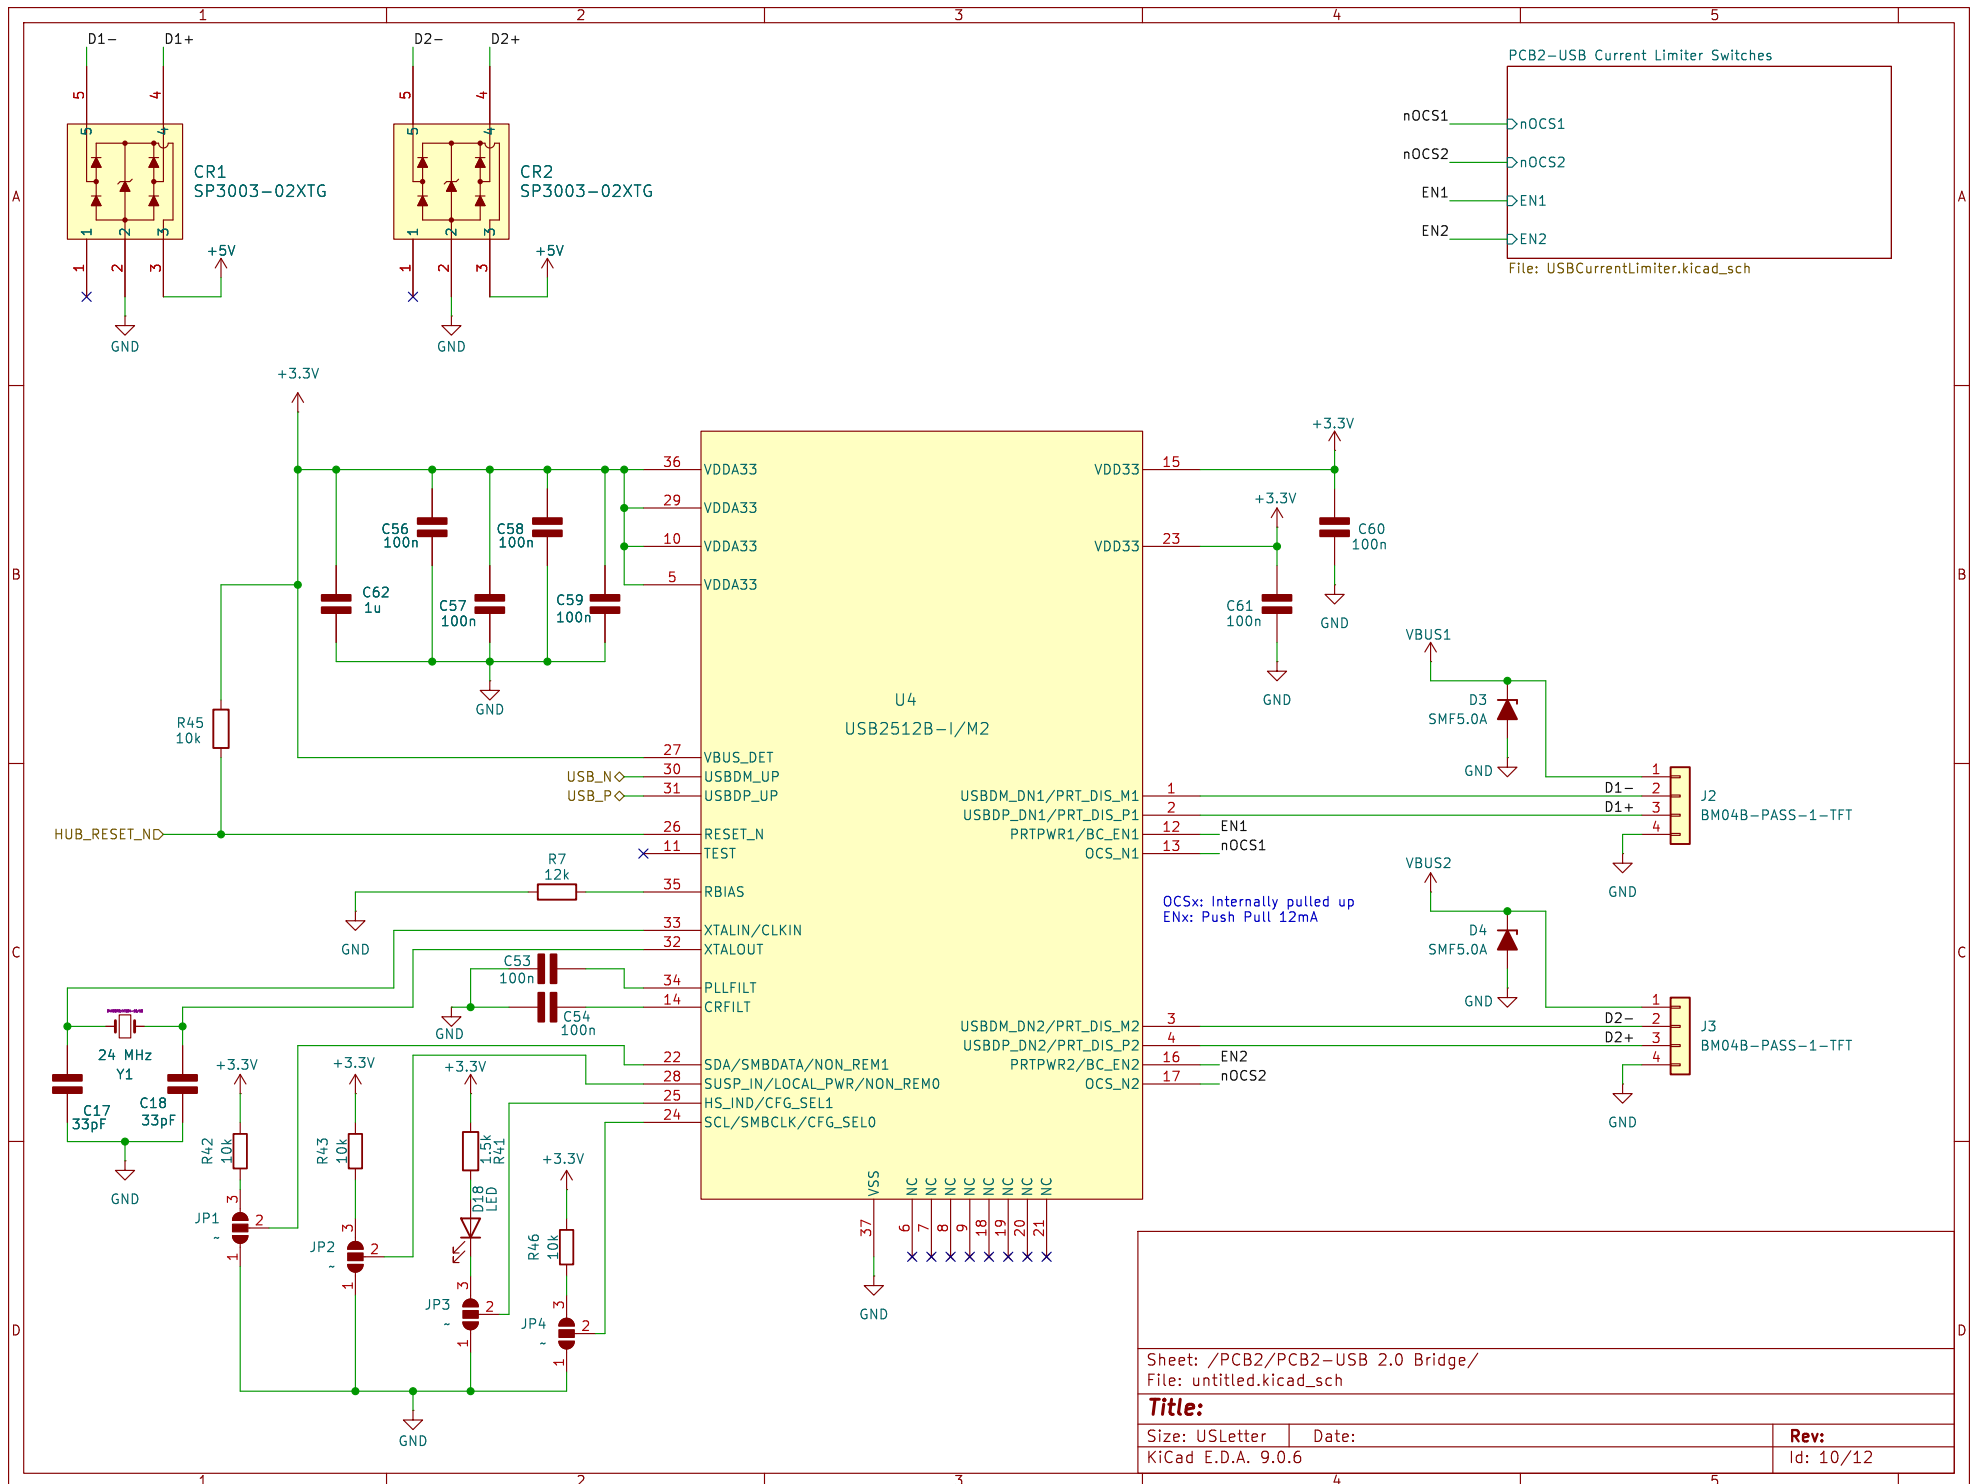

The resistor-capacitor time constant determines the auto-retry time-out period.

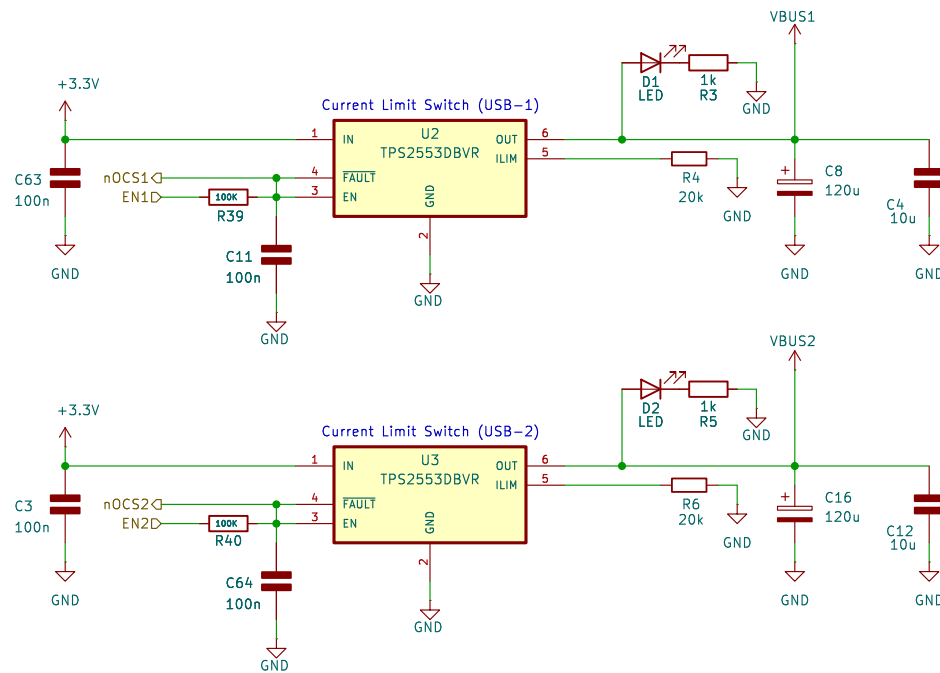

Id: 11/12

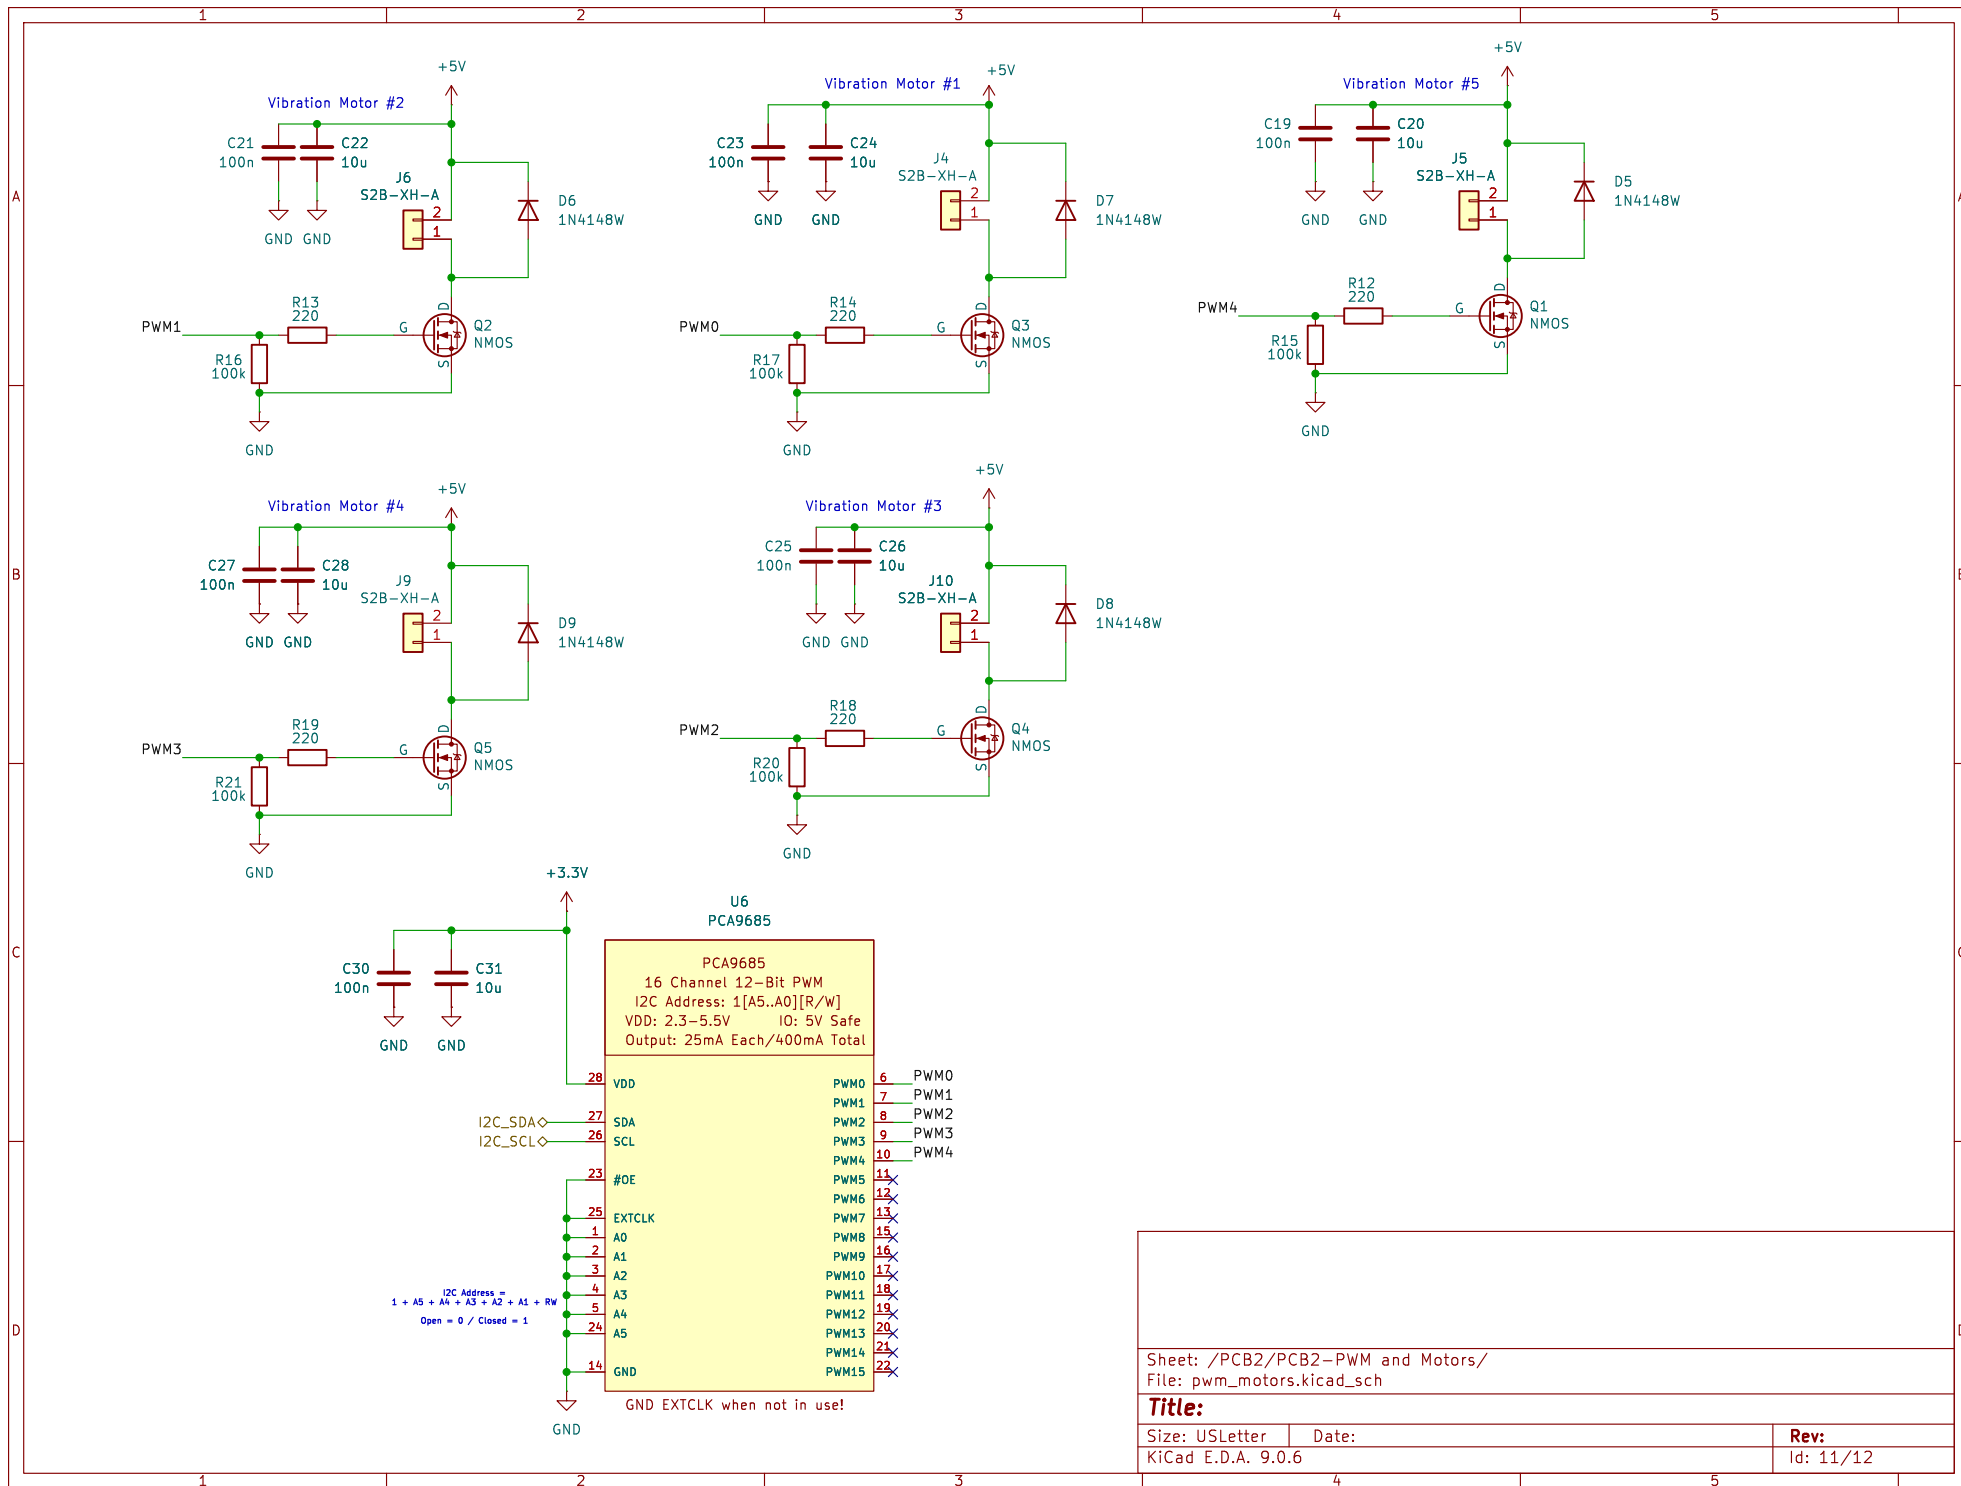

Sheet: /PCB2/PCB2-PWM and Motors/
 File: pwm_motors.kicad_sch

Title:

Size: USLetter Date:
 KiCad E.D.A. 9.0.6

Rev:
 Id: 11/12