



TL2230 SERIES PUSHBUTTON SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

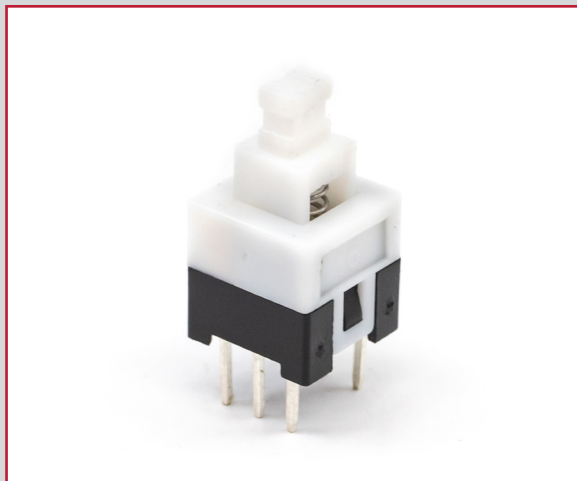


APPLICATIONS / MARKETS




Audio / Visual




Consumer Electronics



Vending Machines



Kiosks



Instrumentation



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 100mA, 30VDC
Electrical Life: 10,000 Cycles
Contact Resistance: 100mΩ Max. Initial
Insulation Resistance: 100MΩ Min.
Dielectric Strength: 500VAC
Operating Temperature: -20°C to 70°C
Actuation Force: 100 ±50gf; 140 ±50gf; 230 ±50gf
Circuit: DPDT; latching or momentary
Travel: 1.8mm Full; 1.0mm to Lock Position
Timing: Non-Shorting (BBM)

FEATURES & BENEFITS

- Through hole mounting design
- PC Pin termination
- DPDT circuit; latching or momentary function
- Plunger actuator; long travel
- Non-shorting (BBM)

PART NUMBER CONFIGURATOR

Series



TL2230

Mechanical Configuration



EE - Latching
OA - Momentary

Operating Force



F100 - 100gf
F140 - 140gf
F230 - 230gf

Specifications subject to change without notice 1.1.2026



E-SWITCH®




www.e-switch.com

800.867.2717

1

TL2230 SERIES PUSHBUTTON SWITCH

BODY DIMENSIONS

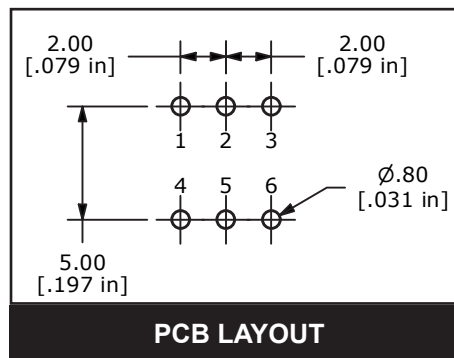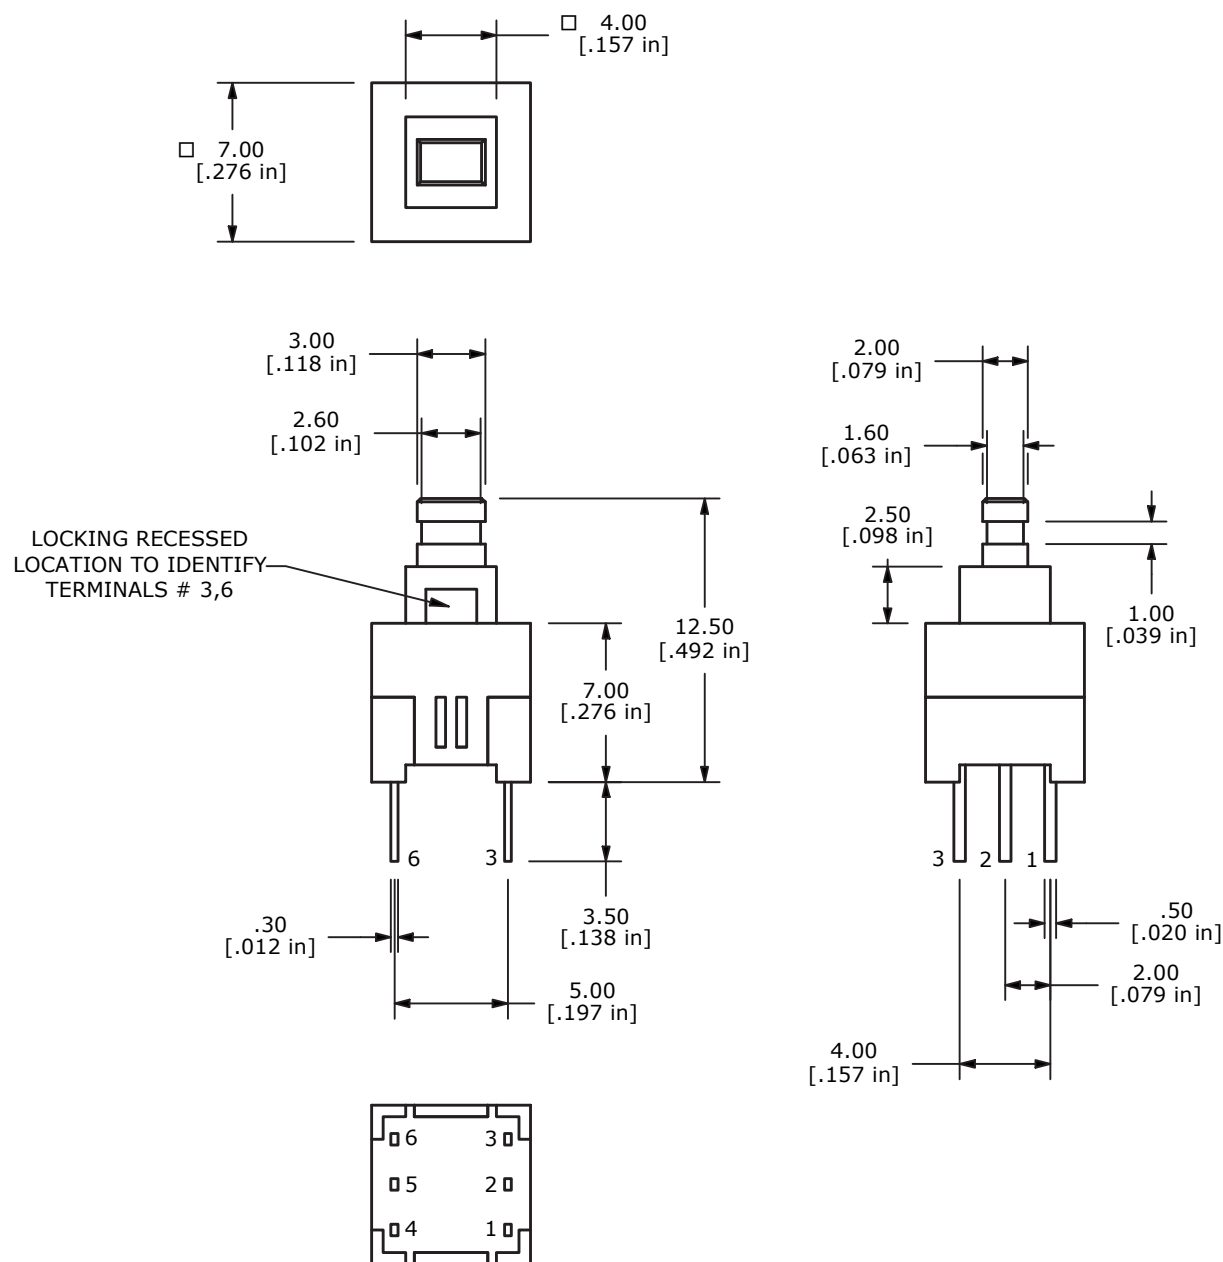

E-SWITCH®

www.e-switch.com

800.867.2717

2

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS