



Commanded and estimated wrench

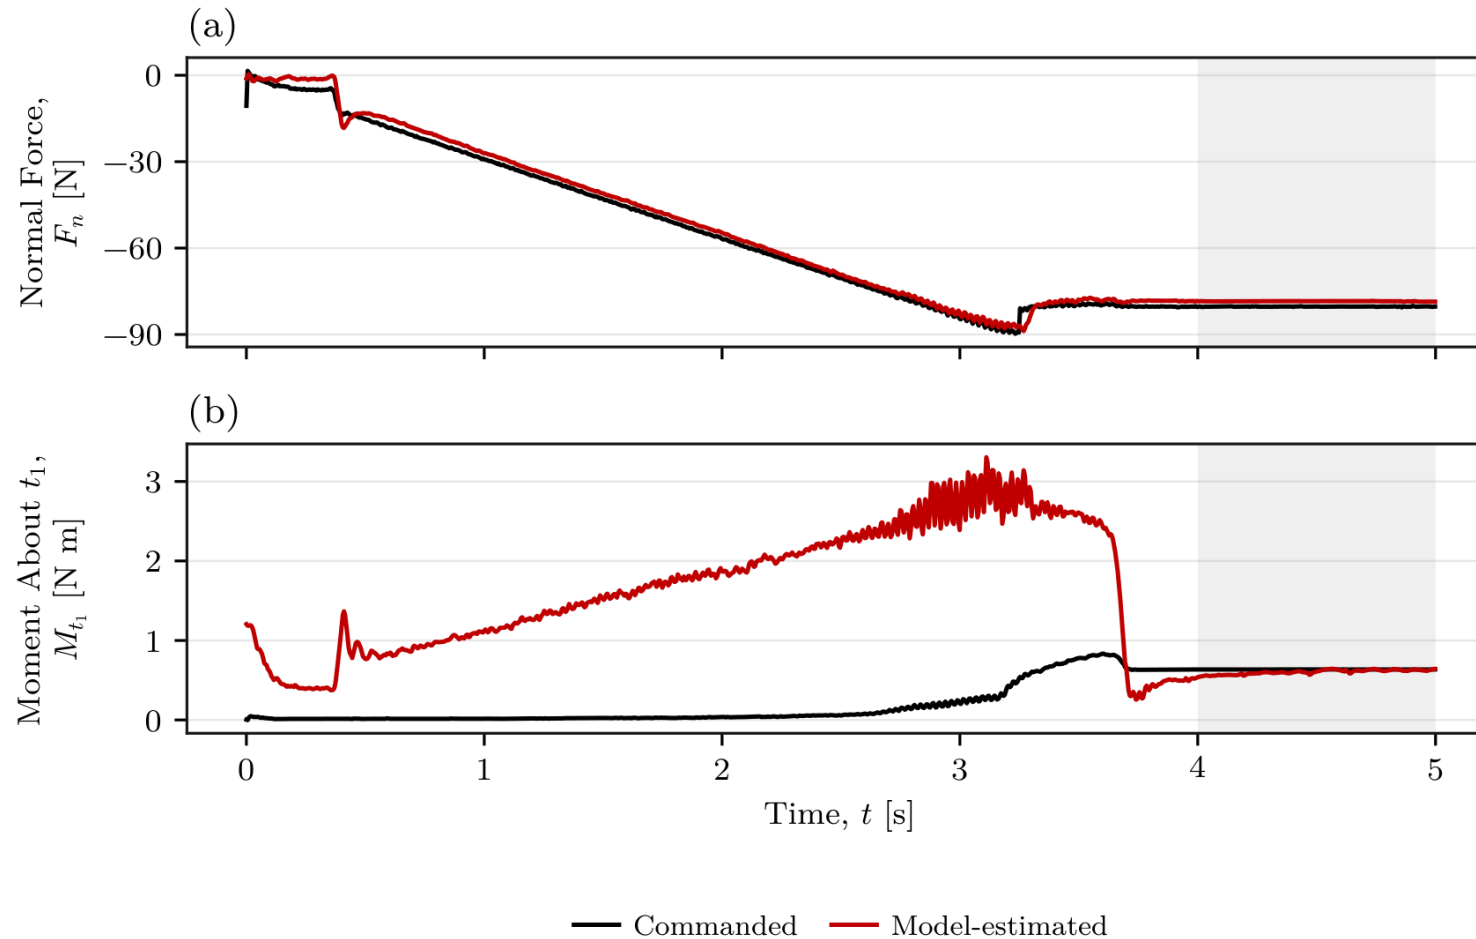


- Stationary force difference: 2.32%
- Stationary moment difference: 4.87%
- Supplementary plausibility evidence

$$F_{n,qs} = K_{p,n} n_s^\top (e_p - e_{p,0})$$

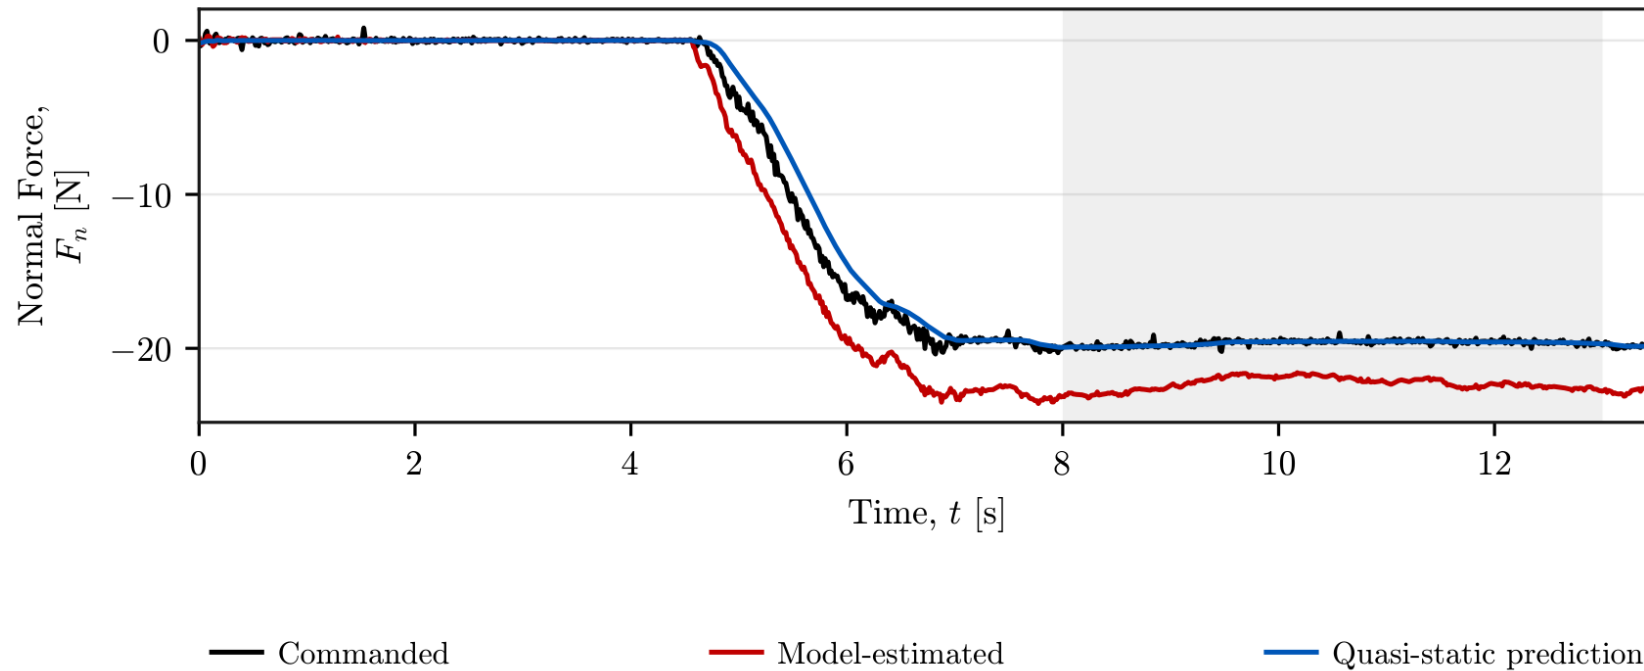

- Spring vs command: 0.05% difference
- Estimate vs command: 13.50% difference

$$M_{t_1,qs} = K_{R,t_1} t_1^\top (e_R - e_{R,0})$$

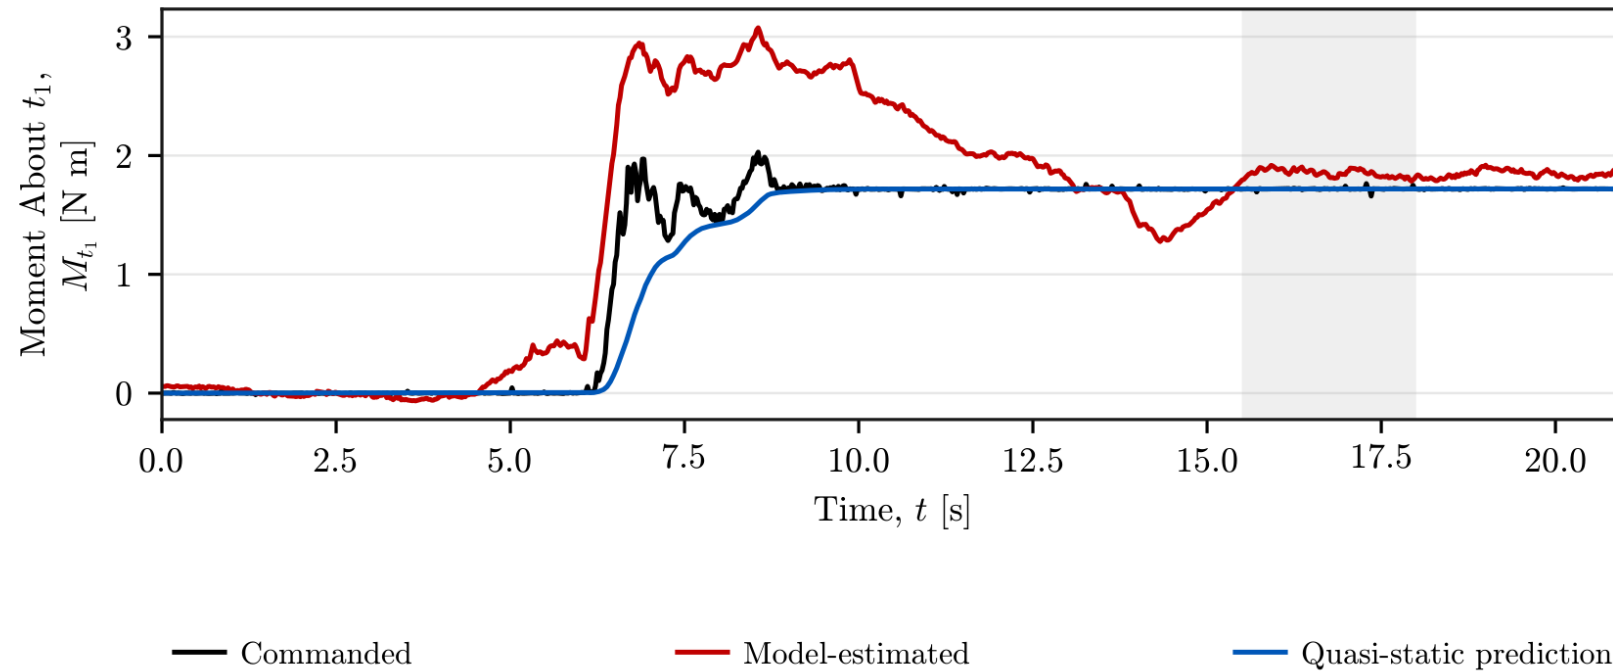

- Spring and commanded mean: 1.719 N m
- Model-estimated mean: 1.852 N m