

수소경제와 에너지저장 시스템

(Hydrogen Economy and Energy Storage Systems)

Haewon Seo, Ph. D

Hydrogen **E**nerg**Y** Lab **ON** **E**arth

Assistant Professor

Division of Climate Change

Hankuk University of Foreign Studies (HUFS)

2. Introduction to Hydrogen (2)

Contents




1. Necessity of Hydrogen
2. Basic of Thermodynamics
3. Hydrogen Production Technology

Types of Energy

□ Primary and Secondary Energy

Energy is indeed abundant, but *usable* energy is strictly limited, making *tools* essential

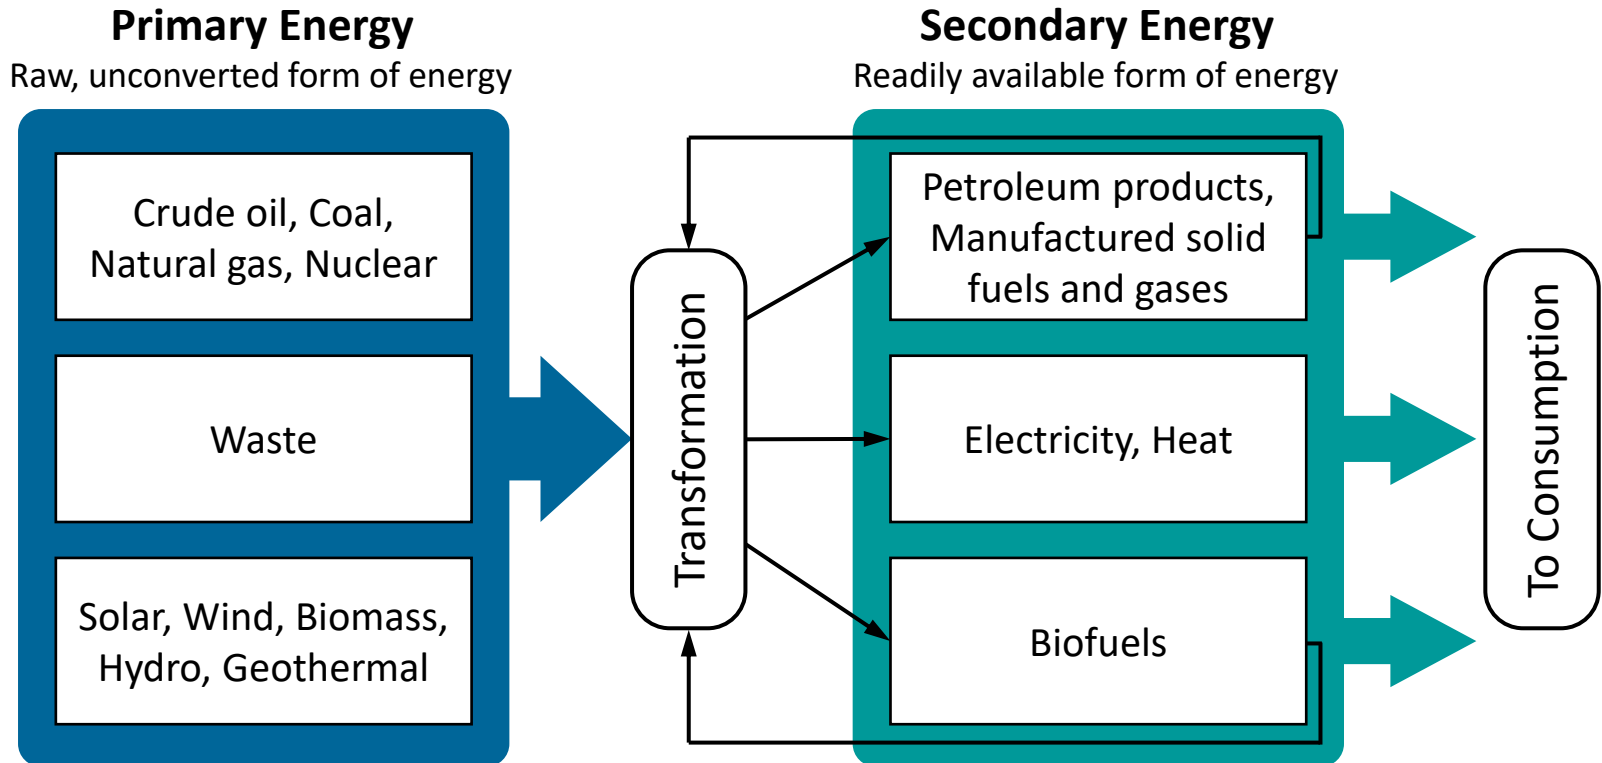


- *Usable* energy must be transformed from primary energy sources
- Every energy conversion process must entail *losses*

Renewable Energy

☐ Renewable Energy

Energy derived from natural resources that are replenished on a human timescale

**Inexhaustible, Ubiquitous, Zero-CO₂ Emission*



Solar



Wind



Hydropower



Biomass




Geothermal Heat


☐ Global Electricity Production

RE accounts for 34% in 2025 (18% in 2005)

**Others: geothermal, biomass, waste, wave and tidal*

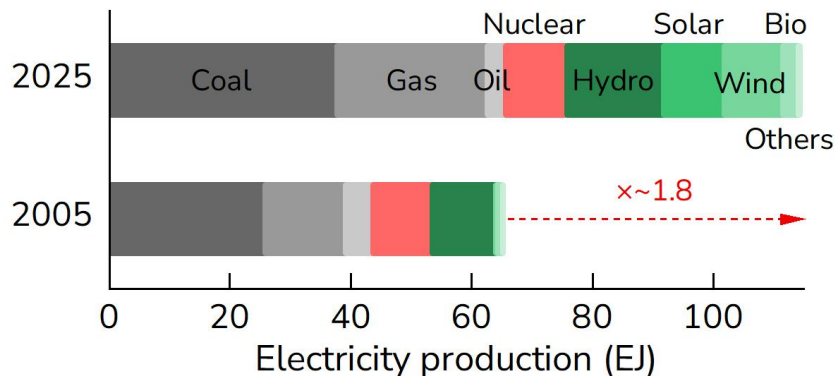

<Source: Statistical Review of World Energy (2025)>

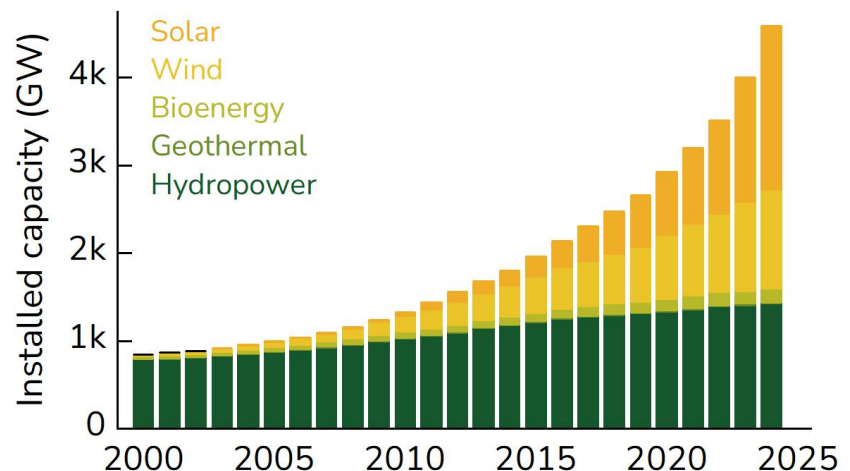

<Source: IRENA (2025)>

Challenges for Renewables


❑ Transport Issues

RE power generation sites are geographically distant from major urban consumption centers. Long-distance bulk power transmission suffers severe grid losses and infrastructure bottlenecks



❑ Storage Issues

RE power generation fluctuates based on weather and diurnal cycles. Electricity is difficult to store directly on a massive, long-term seasonal scale without loss.

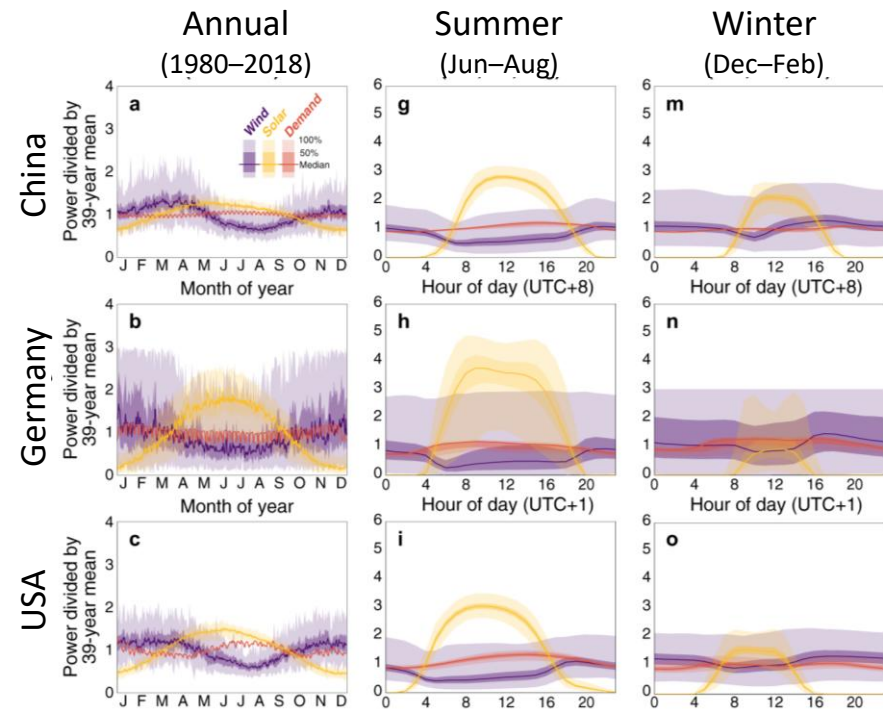


Nat. Comm., **12** (2021) 6146

Energy Storage System


Storage Capacity & Duration

- Long-duration storage
- High energy density in mass (120 MJ kg^{-1})

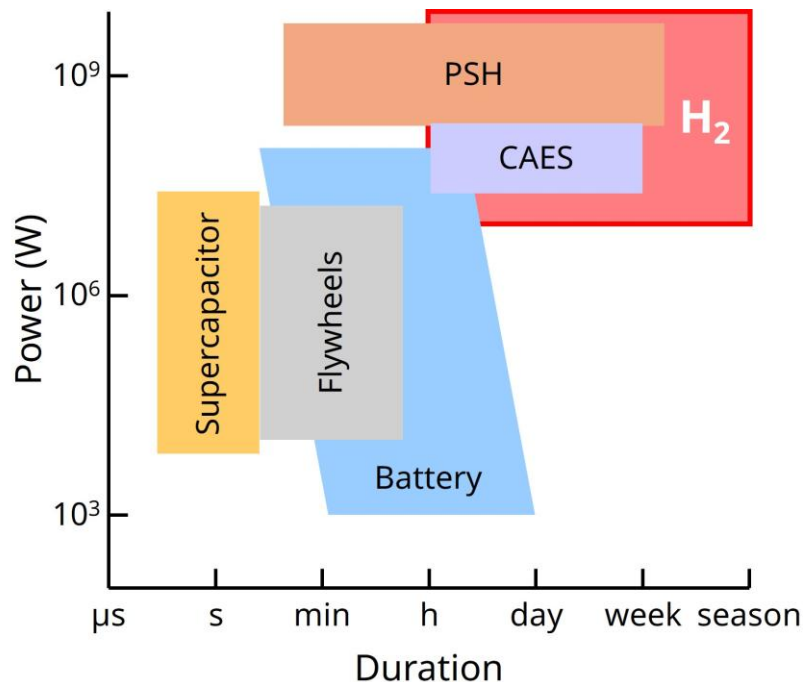

Cost Effectiveness

- Low CAPEX per energy & power

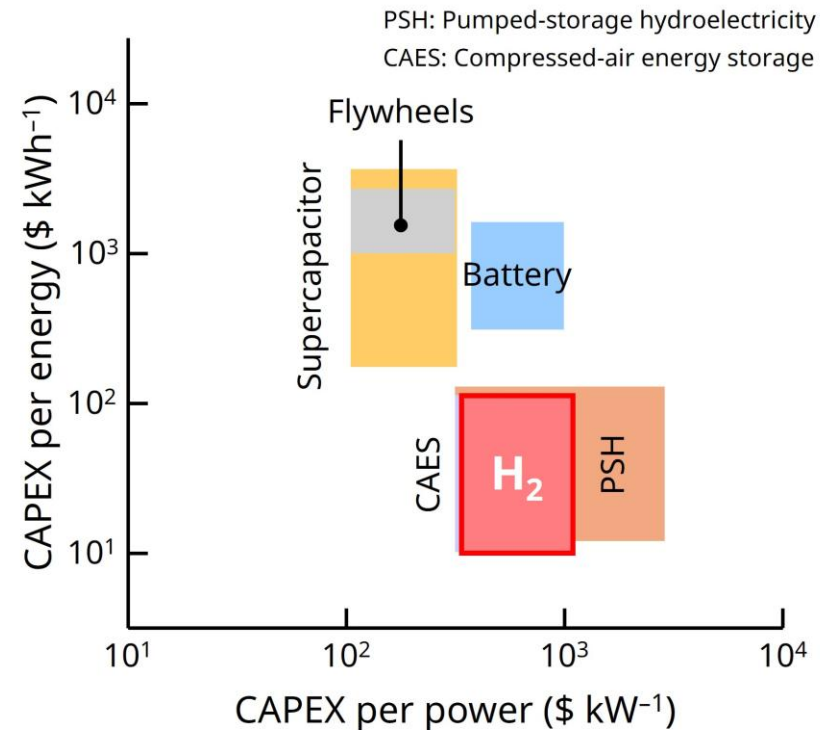

<Source: IEA Technology Roadmap Hydrogen and Fuel Cells>


- H₂ has very high energy density in mass (120 (LHV) & $141.8 \text{ (HHV)} \text{ MJ kg}^{-1}$)
- H₂ can be transported in bulk and stored for long periods w/o degradation

Hydrogen Energy

☐ Renewable Energy

Energy derived from natural resources that are replenished on a human timescale

**Inexhaustible, Ubiquitous, Zero-CO₂ Emission*



Solar




Wind



Hydropower



Biomass



Geothermal Heat

☐ Hydrogen Energy

Energy obtained as heat or power by combusting compounds that contain H or processing them through energy conversion systems




- Interoperability with Electricity
- Capability to Coupling with Renewable Energy

H₂ is highly interchangeable with electricity via fuel cells and electrolyzers. Thus, it enables full utilization and balancing of intermittent renewables.

Hydrogen Supply Chain

□ Produce, store/transport, and use

Establishing, standardizing, and commercializing secure, low-cost technologies across these *three primary pillars* is essential for introducing a full hydrogen society

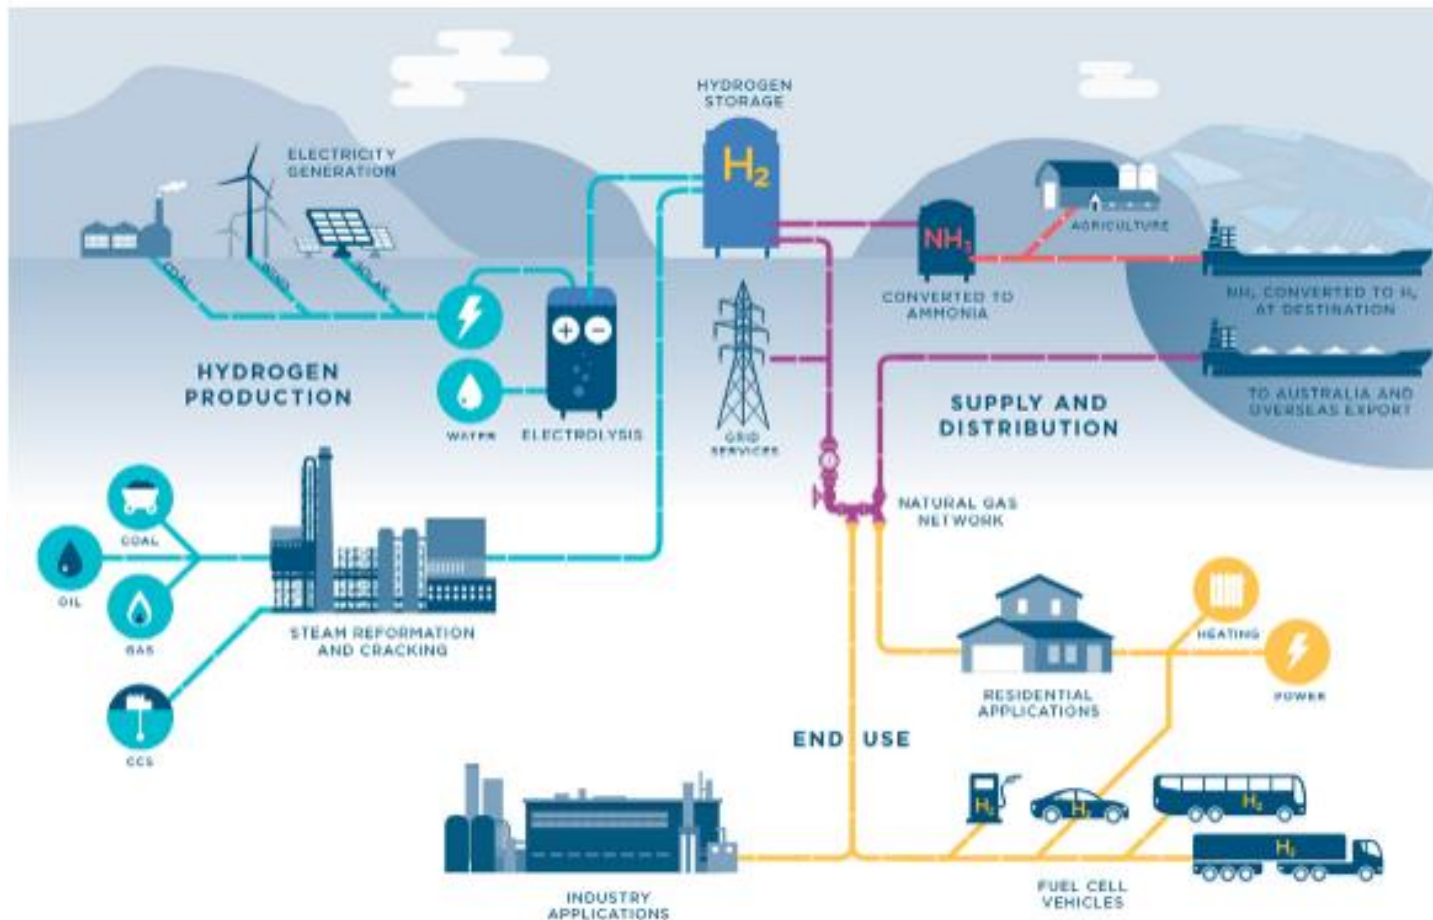

<Source: <https://snurecl.com/>>

Key Technological Objectives

❑ Produce, store/transport, and use

Establishing, standardizing, and commercializing secure, low-cost technologies across these *three primary pillars* is essential for introducing a full hydrogen society

PRODUCE

- Low cost
- Large scale
- Carbon-free production

STORE & TRANSPORT

- High density
- Loss free
- Safe contaminant

USE

- High efficiency
- Clean energy
- Safe energy

Key Technological Objectives

❑ Produce, store/transport, and use

Establishing, standardizing, and commercializing secure, low-cost technologies across these *three primary pillars* is essential for introducing a full hydrogen society

PRODUCE

- Low cost
- Large scale
- Carbon-free production

STORE & TRANSPORT

- High density
- Loss free
- Safe contaminant

USE

- Highly efficient device
- Clean energy

Global Hydrogen Production

Grey, Blue, and Green Hydrogen

The world relies on fossil fuels (grey hydrogen), which account for ~98% of hydrogen production

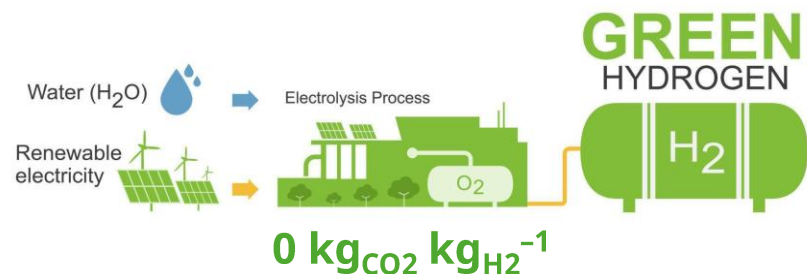
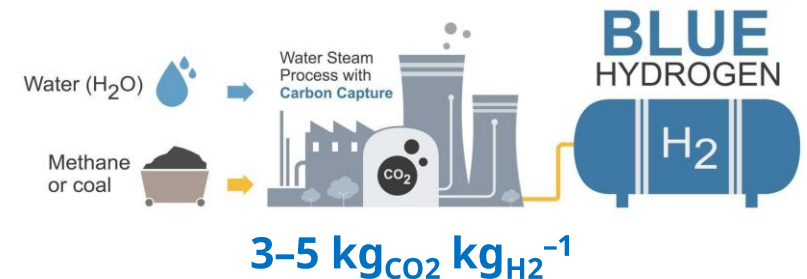
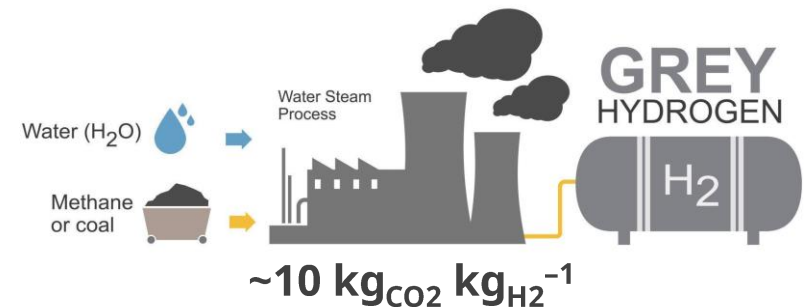
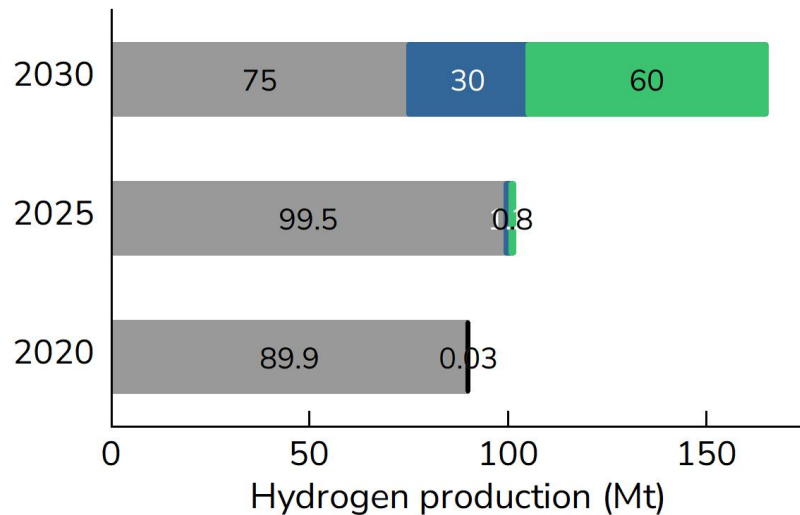


Table Levelized cost of hydrogen (USD kg⁻¹)

	2020	2025	2030
Grey	1.0–2.5	1.5–3.0	1.5–3.2
Blue	1.5–3.0	2.0–3.8	1.8–3.5
Green	3.5–7.5	4.5–8.5	1.5–4.5

<Source: IEA (2025)>

Global Hydrogen Production

Grey, Blue, and Green Hydrogen (2025)

The world relies on fossil fuels (grey hydrogen), which account for ~98% of hydrogen production



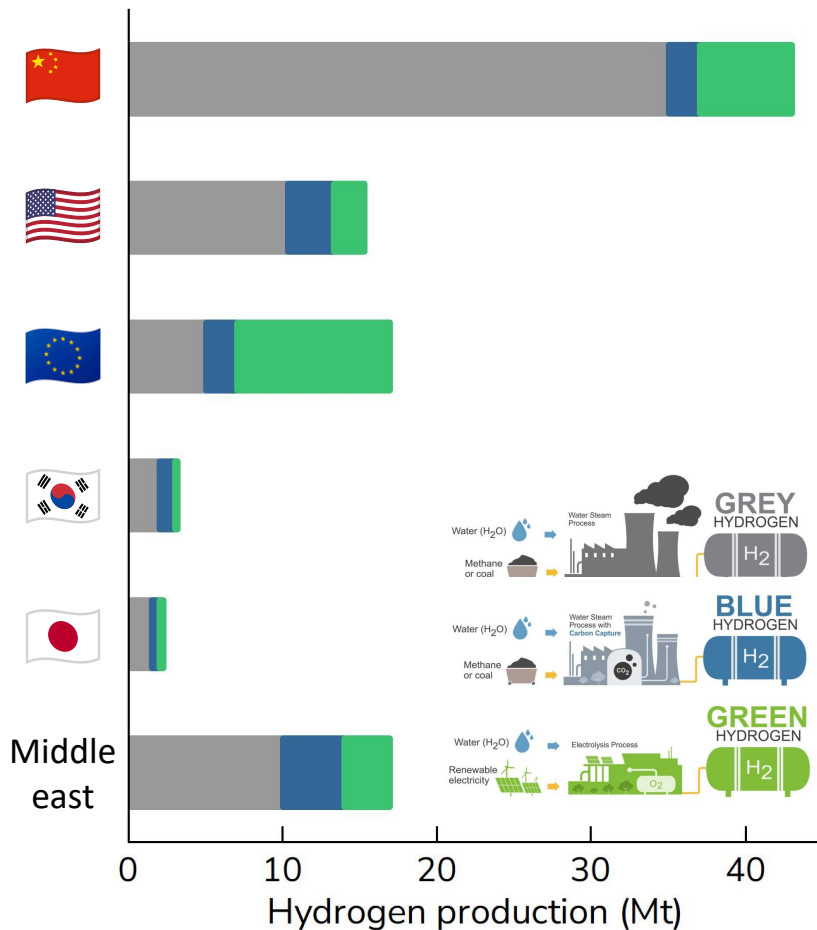


Fig. Hydrogen production prospects to 2030

<Source: IEA (2025)>

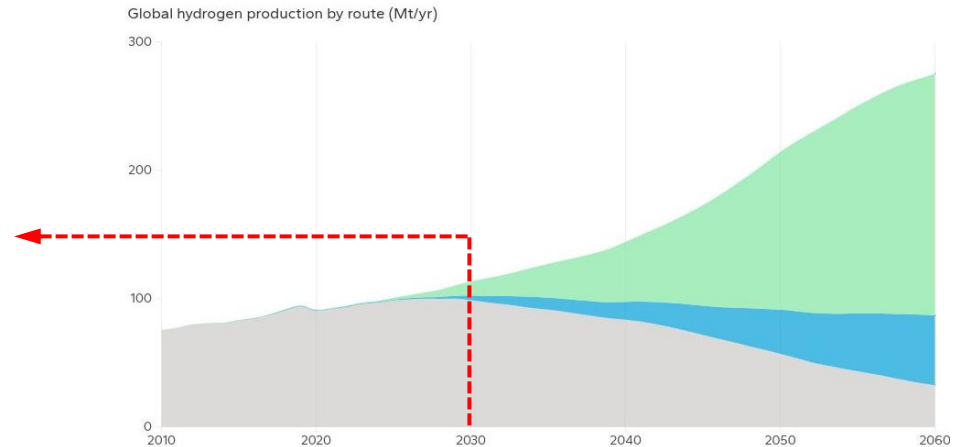

<Source: Energy Transition Outlook (2026)>

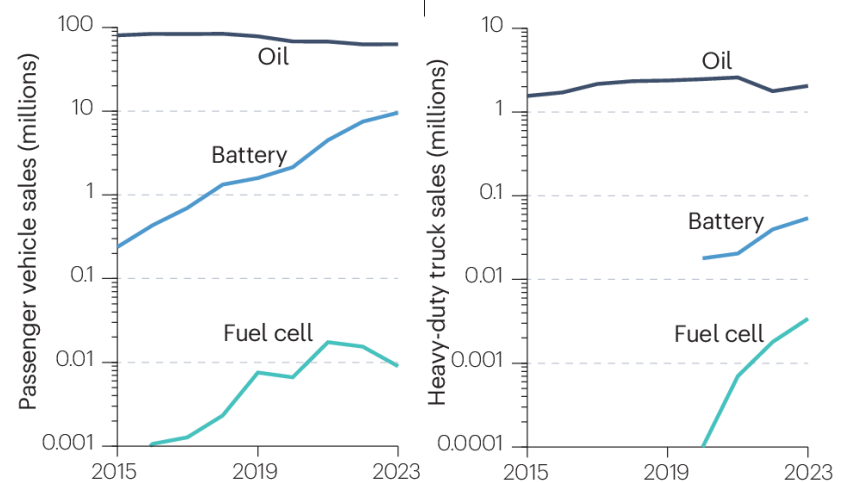

Nat. Rev. Clean Technol., 1 (2025) 351–371

Domestic Hydrogen Production

Annual H₂ Production (2025)

Annual H₂ production in S. Korea reached ~2.2 Mt in 2025, >99% of which is grey hydrogen



기업	내용
HYUNDAI	현대차: 수소전기차, 수소연료전지시스템 생산·판매
SK	SK: 수소 밸류체인(생산·유통·소비) 구축, 수소충전소 운영
POSCO	포스코: 수소 생산·판매
HYOSUNG	효성: 수소 생산·유통, 수소충전소 운영
Hanwha	한화: 수소 밸류체인 구축
DOOSAN	두산: 수소연료전지사업, 수소 생산·유통, 수소드론 판매
현대중공업	현대중공업: 수소 밸류체인 구축
LOTTE	롯데: 수소 생산·판매, 수소충전소 설치, 수소저장탱크사업
GS	GS: 수소 공급, 수소연료전지발전 구축
KOLON	코오롱: 수소차 연료전지부품 생산·판매

경기도 '미니 신도시' 사업

지역	용인, 파주, 고양
사업비	320억원 (도 130억원, 시군 130억원, 기타 60억원)
기간	2027년 12월까지
내용	친환경 수소에너지 자족도시 조성 수소산업 일자리 창출 지역경제 활성화 기여

- Byproduct (62.3%, ~1.4 Mt)
- Steam reforming (36.4%, ~0.80 Mt)
- Low- and/or zero-carbon (0.91%, ~0.020 Mt)

Domestic Hydrogen Production

❑ Byproduct Hydrogen

Oil Refinery in Ulsan

- 3rd largest in the world
- Ownership: SK Energy
- Capacity: 40.2 Mt yr⁻¹ & 850,000 bpd
*1 barrel = 159 L
- Products: LPG, Gasoline, Diesel, Jet fuel, Asphalt



Oil Refinery in Yeosu

- 5th largest in the world
- Ownership: GS Caltex (50% GS Holdings + 50% Chevron)
- Capacity: 730,000 bpd
- Products: Heavy Oil Upgrade (Gasoline, Kerosene, Naphtha)



– Large-scale refining & reforming processes generate abundant byproduct hydrogen

Domestic Hydrogen Production

☐ Steam Methane Reforming (SMR)

SMR Plant in Pyeongtaek

- Largest scale in Korea
- Ownership: KOGAS, HyNet, etc.
- Capacity: 2,550 t yr⁻¹ (7 t day⁻¹)
- Products: High-purity compressed H₂ for mobility, Tube trailers



SMR Plant in Changwon

- 1st commercial liquefied hydrogen plant
- Ownership: Doosan Enerbility, etc.
- Capacity: 1,800 t yr⁻¹ (5 t day⁻¹)
- Products: Liquefied Hydrogen, High-purity gas for buses, power generation



– NG-based SMR plants supply dedicated reformed H₂ for urban and regional mobility

Domestic Hydrogen Production

❑ Water Electrolysis

Water Electrolysis Plant in Jeju

- Largest facility in Korea (12.5 MW)
- Ownership: Korea Southern Power, etc.
- Capacity: 1,176 t yr⁻¹ (up to ~250 kg h⁻¹)
- Products: High-purity H₂ for FCVs, buses, and tube trailers



Water Electrolysis Plant in Buan

- Commercial MW-scale water electrolysis demonstration plant (2.5 MW)
- Ownership: Hyundai E&C, etc.
- Capacity: 365 t yr⁻¹ (1 t day⁻¹)
- Products: Green H₂ for local mobility, regional storage & distribution




– Renewable-based water electrolysis plants supply zero-carbon green H₂ for public transport and carbon neutrality demonstration

Basic of Thermodynamics

□ Thermodynamic Potential

A scalar quantity used to represent the thermodynamic state of a system and measure the maximum reversible work or energy available from it under specific constraint conditions

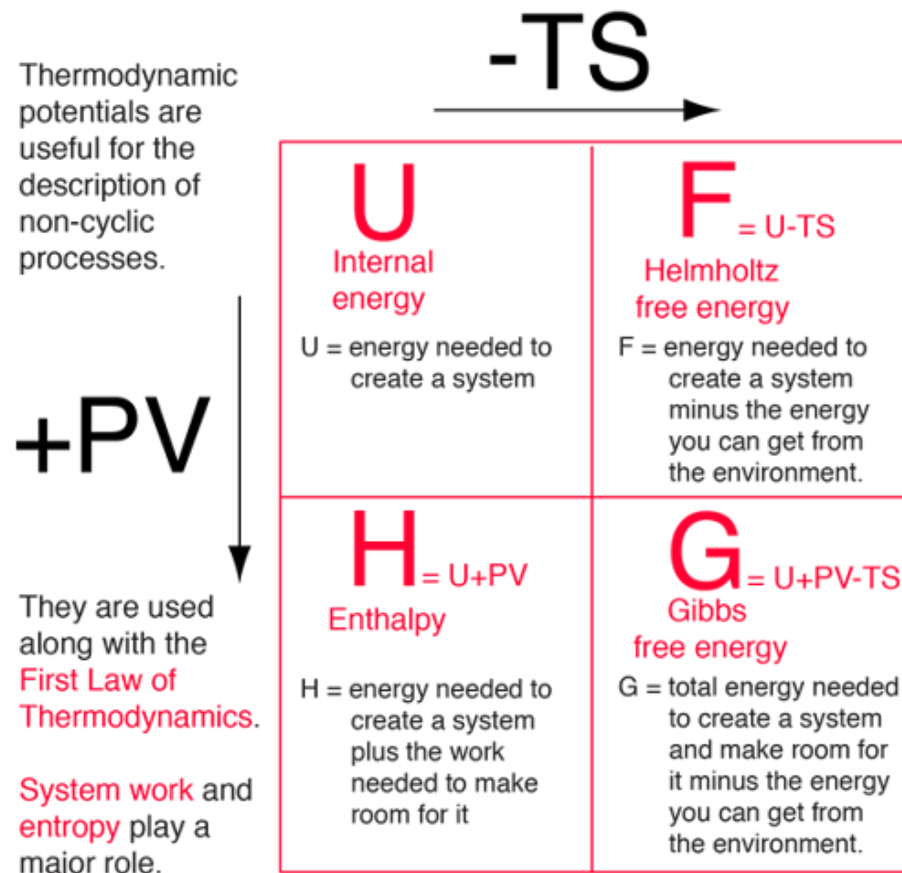

Basic of Thermodynamics

□ Enthalpy H ($= H(S, p) = U + pV$)

The sum of a thermodynamic system's internal energy and the product of its pressure and volume

● Enthalpy Change ΔH

According to the 1st and 2nd laws of thermodynamics,

$$dU = \delta Q - \delta W$$

$$\delta Q = TdS$$

(δQ : energy added as heat

T : temperature

dS : infinitesimal change)

If only pV work is done, $\delta W = pdV$


$$dU = TdS - pdV$$

$$= TdS - pdV - Vdp + Vdp$$

$$\Leftrightarrow dU + d(pV) = TdS + Vdp$$

$$\therefore dH = TdS + Vdp$$

When $dp = 0$ (isobaric) then $dH = TdS = \delta Q$

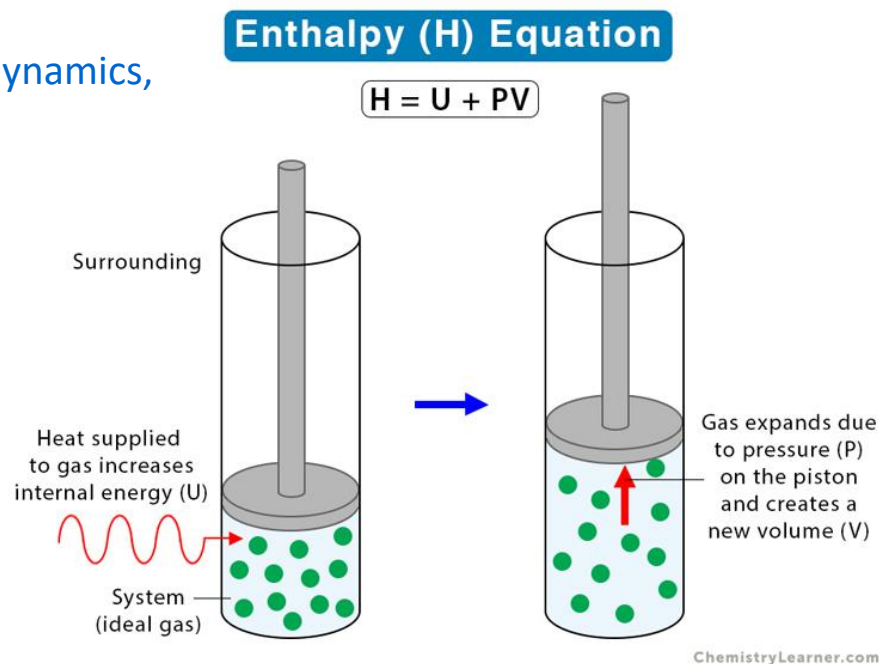

ΔH is used to predict the heat of reaction, as reactions at atmospheric pressure are isobaric processes

Basic of Thermodynamics


□ Enthalpy H

The sum of a thermodynamic system's internal energy and the product of its pressure and volume

- **Standard Reaction Enthalpy $\Delta H^\circ_{\text{rxn}}$**

The difference between total product and total reactant molar enthalpies, calculated for substances in their standard states (25°C, 1 atm).

For a generic chemical reaction



$\Delta H^\circ_{\text{rxn}}$ is related to the standard enthalpy of formation $\Delta_f H^\circ$ of the reactants and products;

$$\Delta H^\circ_{\text{rxn}} = \sum \nu_{\text{product}} \Delta_f H^\circ_{\text{product}} - \sum \nu_{\text{reactant}} \Delta_f H^\circ_{\text{reactant}}$$

, where ν_i is the stoichiometric coefficients of each product and reactant.

Basic of Thermodynamics


□ Exothermic and Endothermic Reactions

When $\Delta H < 0$: Exothermic reaction (e.g., Combustion)

$\Delta H = 0$: No net change in enthalpy

$\Delta H > 0$: Endothermic reaction (e.g., Ice melting)

Endothermic and Exothermic Reactions Energy Graph

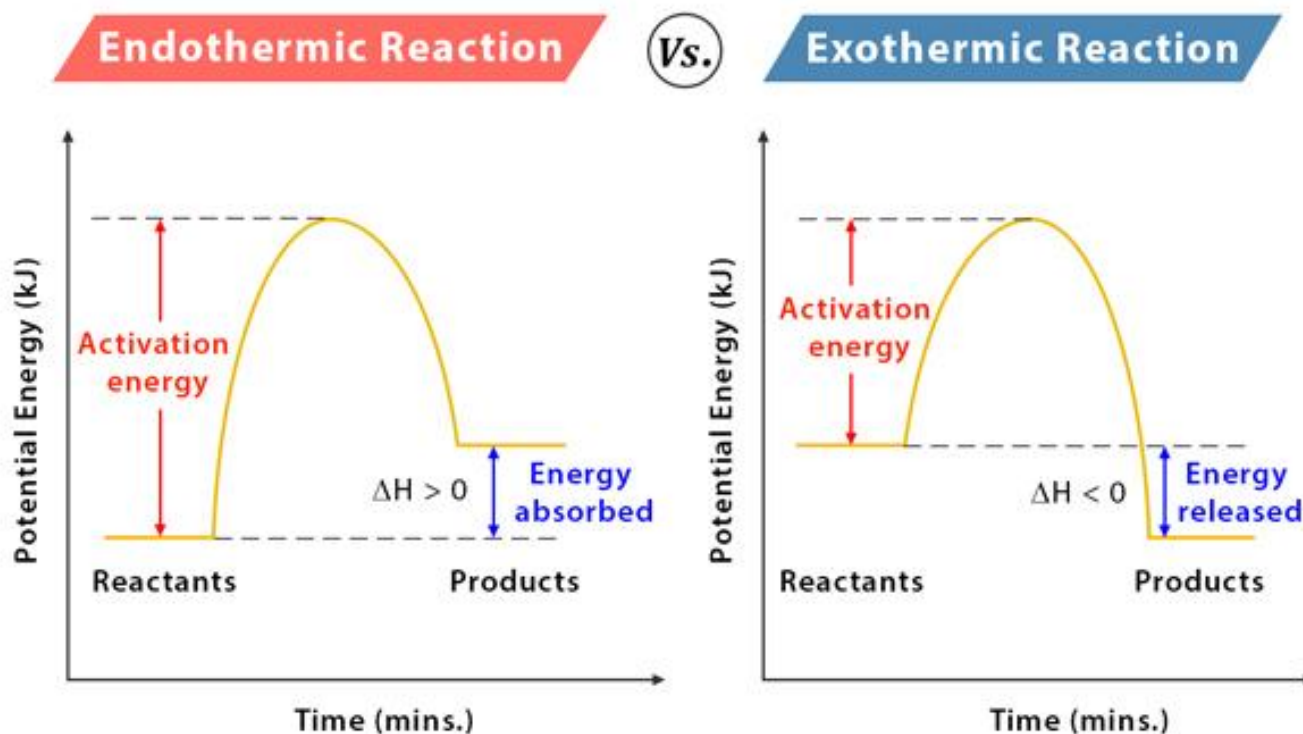

Basic of Thermodynamics

□ Helmholtz Free Energy $F (= F(T, V) = U - TS)$

The useful work obtainable from a closed thermodynamic system at a constant temperature

● Helmholtz Free Energy Change ΔF

According to the 1st and 2nd laws of thermodynamic

$$dU = \delta Q - \delta W$$

$$\delta Q = TdS$$

(δQ : energy added as heat

T : temperature

dS : infinitesimal change)

If only pV work is done, $\delta W = pdV$

$$dU = TdS - pdV$$


$$= TdS - pdV + SdT - SdT$$

$$\Leftrightarrow dU - d(TS) = -SdT - pdV$$

$$\therefore dF = -SdT - pdV$$

When $dT = 0$ (isothermal) then $dF = -pdV = -\delta W$

Helmholtz Free Energy

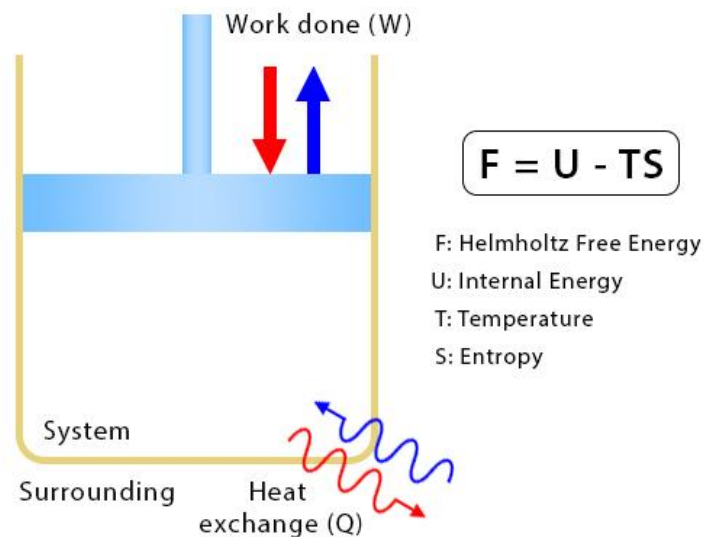

ChemistryLearner.com

Basic of Thermodynamics



□ Gibbs Free Energy G ($= G(p, T) = U + pV - TS = H - TS$)

The maximum amount of work that may be performed by a thermodynamically closed system at constant temperature and pressure

● Gibbs Free Energy Change ΔG

According to the 1st law of thermodynamics,

$$dU = \delta Q - \delta W$$

The work done on the system can be written by

$$\delta W = pdV + \delta W_x$$

(δW_x : other forms of work (electrical, magnetic, etc.))

Then

$$dU = \delta Q - pdV - \delta W_x$$

And


$$\begin{aligned} dG &= dU + pdV - TdS \\ &= dH - TdS \\ &= \delta Q - TdS - \delta W_x \end{aligned}$$

According to the 2nd law of thermodynamics ($\delta Q \leq TdS$),


$$dG \leq \delta W_x$$

When $\delta W_x = 0$ (if only mechanical work is done) then $dG \leq 0$

Endergonic Reaction Graph

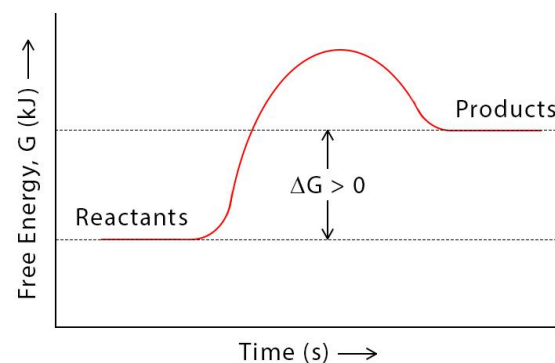

Exergonic Reaction Graph

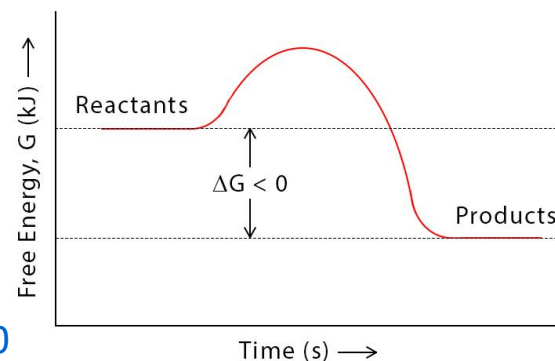

ChemistryLearner.com



Basic of Thermodynamics

❑ Exergonic and Endergonic Reactions

When $\Delta G < 0$: The forward reaction happens by itself; it releases energy (exergonic)

$\Delta G = 0$: Equilibrium

$\Delta G > 0$: The forward reaction does not happen by itself; it needs an energy input (endergonic)

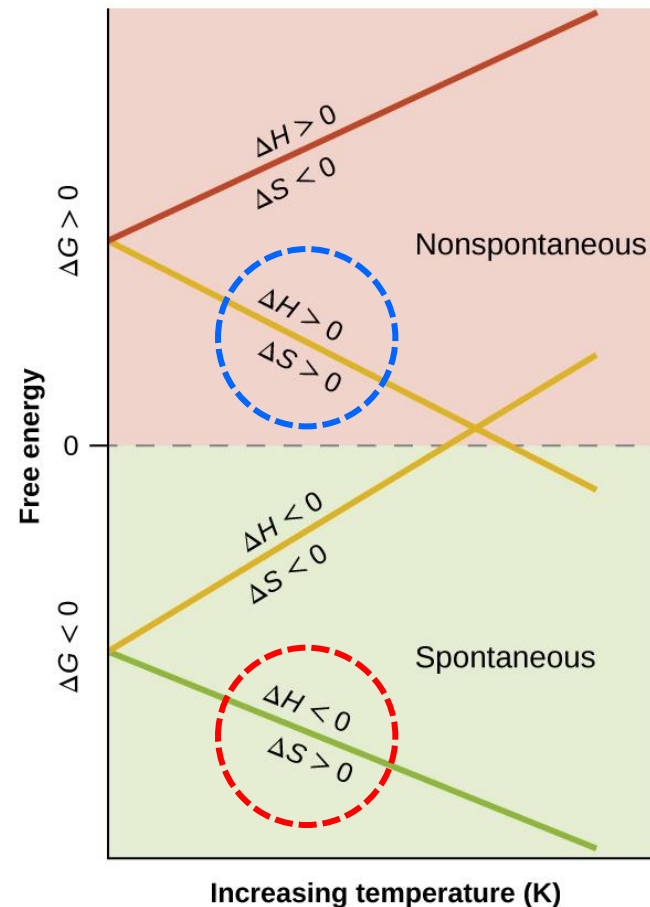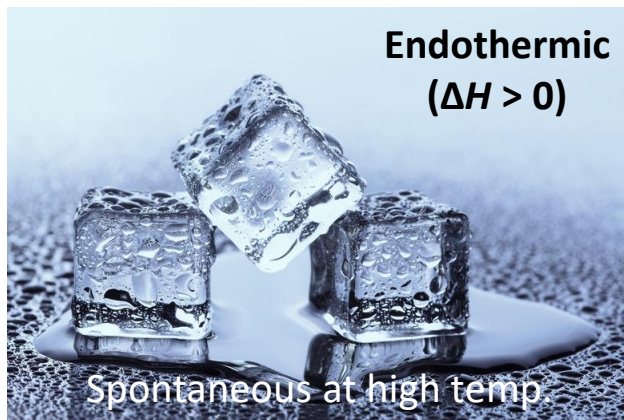


Hydrogen Energy

□ Oxidation of Methanol

The reaction of burning methanol with oxygen to produce carbon dioxide and liquid water

- Direct methanol fuel cells (DMFCs) use methanol instead of hydrogen as fuel. Calculate the standard enthalpy ΔH° and standard entropy ΔS° for the methanol combustion reaction at 25 °C, 1 atm.



Chemical species	$\Delta_f H^\circ$ (kJ mol ⁻¹)	$\Delta_f S^\circ$ (J mol ⁻¹ K ⁻¹)
CH ₃ OH(l)	-238.5	127.2
O ₂ (g)	0	205.0
CO ₂ (g)	-393.5	213.8
H ₂ O(l)	-285.8	69.95

$$\begin{aligned} \Delta H^\circ_{\text{rxn}} &= \sum \nu_{\text{product}} \Delta_f H^\circ_{\text{product}} - \sum \nu_{\text{reactant}} \Delta_f H^\circ_{\text{reactant}} \\ &= \quad \text{kJ mol}^{-1} \end{aligned}$$


$$\begin{aligned} \Delta S^\circ_{\text{rxn}} &= \sum \nu_{\text{product}} \Delta_f S^\circ_{\text{product}} - \sum \nu_{\text{reactant}} \Delta_f S^\circ_{\text{reactant}} \\ &= \quad \text{J mol}^{-1} \text{ K}^{-1} \end{aligned}$$

Hydrogen Energy

❑ Water–gas shift reaction

The reaction of carbon monoxide and water vapor to form carbon dioxide and hydrogen

- Determine the temperature at which the following reaction attains equilibrium.



Chemical species	$\Delta_f H^\circ$ (kJ mol ⁻¹)	$\Delta_f S^\circ$ (J mol ⁻¹ K ⁻¹)
CO(g)	-110.5	197.7
H ₂ O(g)	-241.8	188.8
CO ₂ (g)	-393.5	213.8
H ₂ (g)	0	130.7


$$\begin{aligned} \Delta H^\circ_{\text{rxn}} &= \sum \nu_{\text{product}} \Delta_f H^\circ_{\text{product}} - \sum \nu_{\text{reactant}} \Delta_f H^\circ_{\text{reactant}} \\ &= \text{kJ mol}^{-1} \end{aligned}$$

$$\begin{aligned} \Delta S^\circ_{\text{rxn}} &= \sum \nu_{\text{product}} \Delta_f S^\circ_{\text{product}} - \sum \nu_{\text{reactant}} \Delta_f S^\circ_{\text{reactant}} \\ &= \text{J mol}^{-1} \text{K}^{-1} \end{aligned}$$

$$\begin{aligned} \Delta G^\circ_{\text{rxn}} &= \Delta H^\circ_{\text{rxn}} - T \Delta S^\circ_{\text{rxn}} = 0 \\ \therefore T &= \Delta H^\circ_{\text{rxn}} / \Delta S^\circ_{\text{rxn}} = \end{aligned}$$

Hydrogen Production

Various Production Methods


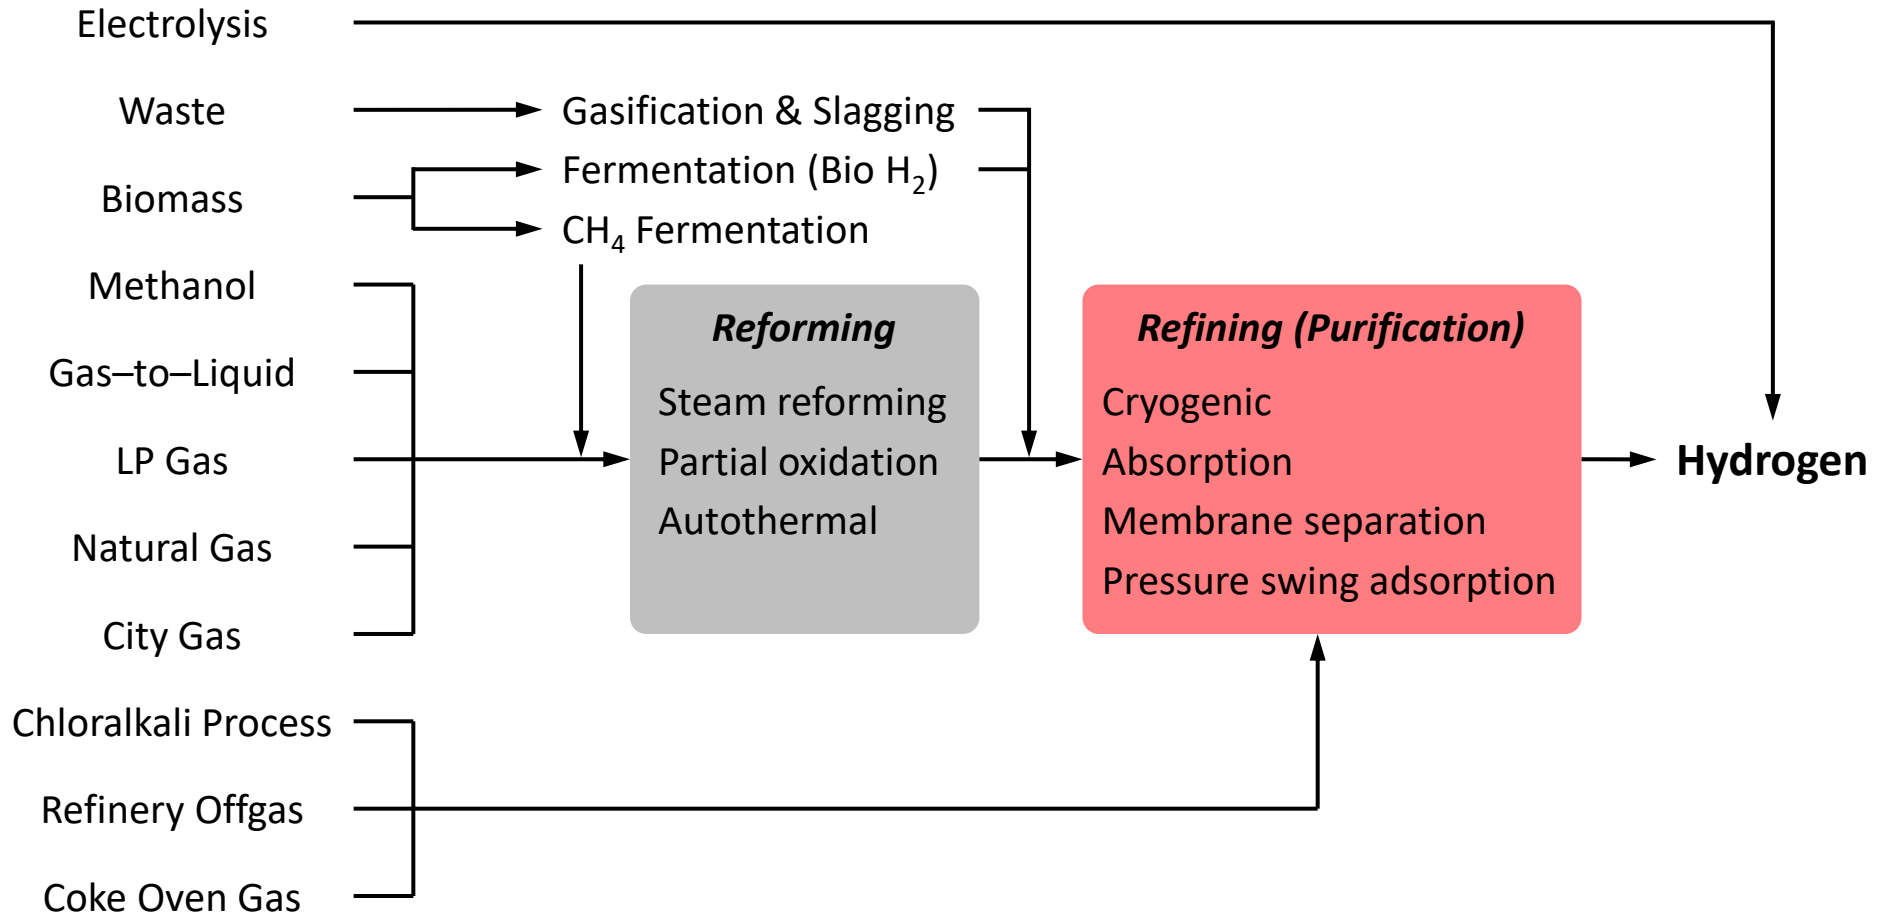


Reformed Hydrogen

☐ Steam Methane Reforming (SMR)

A method for producing syngas ($\text{H}_2 + \text{CO}$) by reaction of hydrocarbon (e.g., NG) and water

- SMR is dominant method and accounts for ~60–75% of global hydrogen production
- $\text{CH}_4 + \text{H}_2\text{O} \rightarrow \text{CO} + 3\text{H}_2$ ($\Delta H^\circ = 206.1 \text{ kJ mol}^{-1}$)
- CH_4 reacts with H_2O at high temperatures (700–1000 °C) & high pressures (3–25 bar)
- Then, water–gas shift reaction occurs (WGS) ($\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$))
- **Direct steam reforming** $\text{CH}_4 + 2\text{H}_2\text{O} \rightarrow \text{CO}_2 + 4\text{H}_2$ ($\Delta H^\circ = 164.9 \text{ kJ mol}^{-1}$)

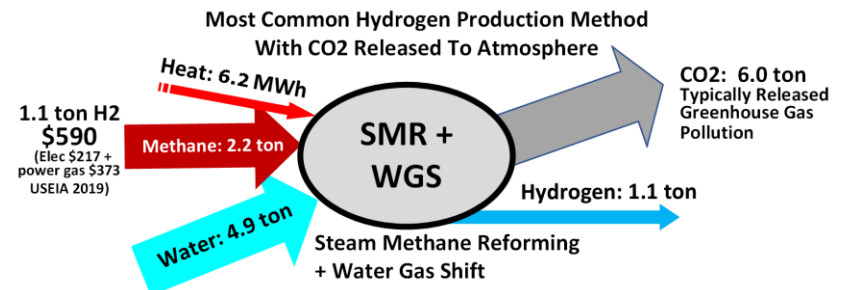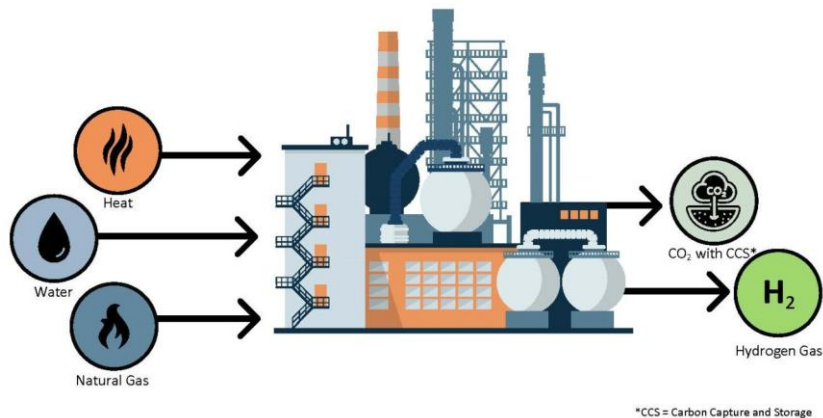

Reformed Hydrogen

☐ Steam Reforming of Hydrocarbon

- Write the balanced chemical equations for the direct steam reforming of propane (C_3H_8) and ethanol ($\text{C}_2\text{H}_5\text{OH}$). For each reaction, state the standard enthalpy of reaction ΔH° and calculate the mass of CO_2 emitted to produce 1.0 kg of H_2 .
(Assume the molar masses of H_2 and CO_2 are respectively 2.0 and 44 g mol⁻¹ for your calculations and round your final answers to one decimal places.)

Propane $\text{C}_3\text{H}_8 + \text{H}_2\text{O} \rightarrow \text{CO} + \text{H}_2$ ($\Delta H^\circ = 498.6 \text{ kJ mol}^{-1}$) (Steam reforming of C_3H_8)

$\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$) (Water–gas shift reaction)

$\text{C}_3\text{H}_8 + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ ($\Delta H^\circ = \quad \text{kJ mol}^{-1}$) (Direct steam reforming of C_3H_8)

$n_{\text{CO}_2} = (1000 \text{ g} \div 2.0 \text{ g mol}^{-1}) \div \quad = \quad \text{mol}$

$\therefore m_{\text{CO}_2} = \quad \text{mol} \times 44 \text{ g mol}^{-1} = \quad \text{kg}$

Reformed Hydrogen

☐ Steam Reforming of Hydrocarbon

- Write the balanced chemical equations for the direct steam reforming of propane (C_3H_8) and ethanol (C_2H_5OH). For each reaction, state the standard enthalpy of reaction ΔH° and calculate the mass of CO_2 emitted to produce 1.0 kg of H_2 .
(Assume the molar masses of H_2 and CO_2 are respectively 2.0 and 44 g mol⁻¹ for your calculations and round your final answers to one decimal places.)

Ethanol $C_2H_5OH + H_2O \rightarrow CO + H_2$ ($\Delta H^\circ = 256.1 \text{ kJ mol}^{-1}$) (Steam reforming of C_2H_5OH)

$CO + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$) (Water–gas shift reaction)

$C_2H_5OH + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ = \quad \text{kJ mol}^{-1}$) (Direct steam reforming of C_2H_5OH)

$n_{H_2} = (1000 \text{ g} \div 2.0 \text{ g mol}^{-1}) \div \quad = \quad \text{mol}$


$\therefore m_{CO_2} = \quad \text{mol} \times 44 \text{ g mol}^{-1} = \quad \text{kg}$

Reformed Hydrogen

□ Partial Oxidation (POX)

POX occurs when a substoichiometric fuel–air mixture is partially combusted in a reformer

- $C_nH_m + 0.5nO_2 \rightarrow nCO + 0.5mH_2$ ($\Delta H^\circ_{\text{POX}} < 0$)
(e.g., partial oxidation of methane: $CH_4 + 0.5O_2 \rightarrow CO + 2H_2$ ($\Delta H^\circ_{\text{POX}} = -35.7 \text{ kJ mol}^{-1}$))
(cf., complete oxidation of methane: $CH_4 + 2O_2 \rightarrow CO_2 + H_2O$ ($\Delta H^\circ_{\text{COX}} = -891 \text{ kJ mol}^{-1}$))
- Subsequently, water–gas shift reaction occurs ($CO + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ_{\text{WGS}} = -41.2 \text{ kJ mol}^{-1}$))
- POX is much faster than SMR and requires a smaller reactor vessel

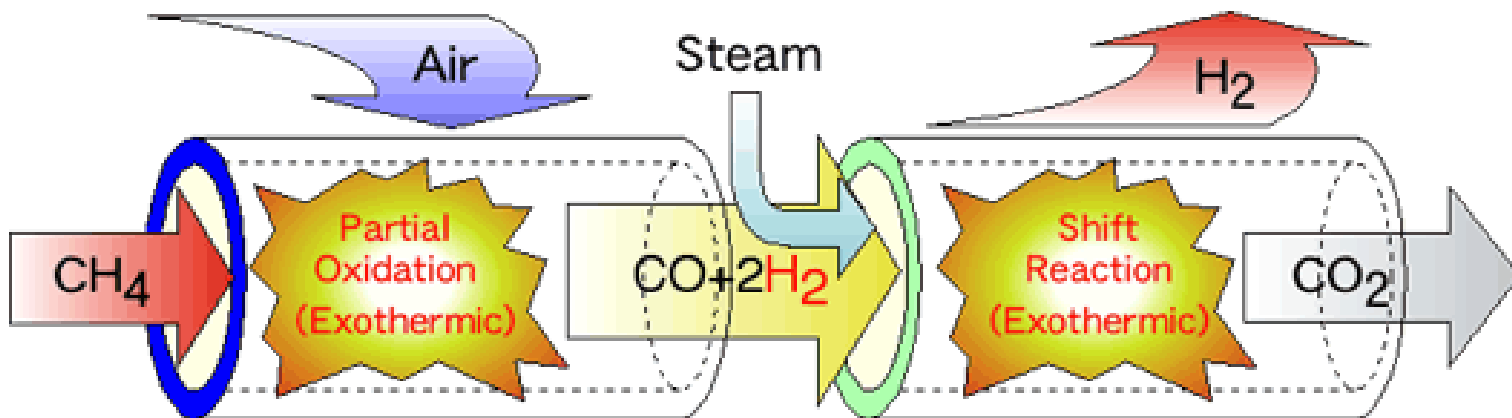

Reformed Hydrogen

□ Partial Oxidation (POX)

- Write the overall balanced chemical equations combining POX and WGSR for propane (C_3H_8) and ethanol ($\text{C}_2\text{H}_5\text{OH}$). For each overall process, state the standard enthalpy of reaction ΔH° and calculate the mass of CO_2 emitted to produce 1.0 kg of H_2 . (Assume the molar masses of H_2 and CO_2 are respectively 2.0 and 44 g mol⁻¹ for your calculations and round your final answers to one decimal places.)

Propane $\text{C}_3\text{H}_8 + \text{O}_2 \rightarrow \text{CO} + \text{H}_2$ ($\Delta H^\circ = -226.8 \text{ kJ mol}^{-1}$) (Partial oxidation of C_3H_8)

$\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$) (Water–gas shift reaction)

$\text{C}_3\text{H}_8 + \text{O}_2 + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$ ($\Delta H^\circ = \quad \text{kJ mol}^{-1}$) (Overall)

$n_{\text{CO}_2} = (1000 \text{ g} \div 2.0 \text{ g mol}^{-1}) \div \quad = \quad \text{mol}$

$\therefore m_{\text{CO}_2} = \quad \text{mol} \times 44 \text{ g mol}^{-1} = \quad \text{kg}$

Reformed Hydrogen

□ Partial Oxidation (POX)

- Write the overall balanced chemical equations combining POX and WGSR for propane (C_3H_8) and ethanol (C_2H_5OH). For each overall process, state the standard enthalpy of reaction ΔH° and calculate the mass of CO_2 emitted to produce 1.0 kg of H_2 . (Assume the molar masses of H_2 and CO_2 are respectively 2.0 and 44 g mol⁻¹ for your calculations and round your final answers to one decimal places.)

Ethanol $C_2H_5OH + O_2 \rightarrow CO + H_2$ ($\Delta H^\circ = 13.8 \text{ kJ mol}^{-1}$) (Partial oxidation of C_2H_5OH)

$CO + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$) (Water–gas shift reaction)

$C_2H_5OH + O_2 + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ = \quad \text{kJ mol}^{-1}$) (Overall)

$n_{CO_2} = (1000 \text{ g} \div 2.0 \text{ g mol}^{-1}) \div \quad = \quad \text{mol}$

$\therefore m_{CO_2} = \quad \text{mol} \times 44 \text{ g mol}^{-1} = \quad \text{kg}$

Byproduct Hydrogen


□ Hydrocarbon Steam Cracking

Pyrolysis of hydrocarbons (naphtha, ethane, LPG, gas oil, etc.) produces byproduct hydrogen along with basic petrochemicals (ethylene, propylene, propane, etc.), followed by purification using deep cryogenic distillation (boiling point differences).

- **Internal:** Fuel for cracking furnaces, selective hydrogenation of alkynes

$$*C_2H_2 + H_2 \rightarrow C_2H_4 \text{ (Ethylene)}$$
- **External:** Hydrodesulfurization in oil refineries, industrial fuel, or chemical reduction processes

$$**Fe_2O_3 + 3H_2 \rightarrow 2Fe + 3H_2O$$

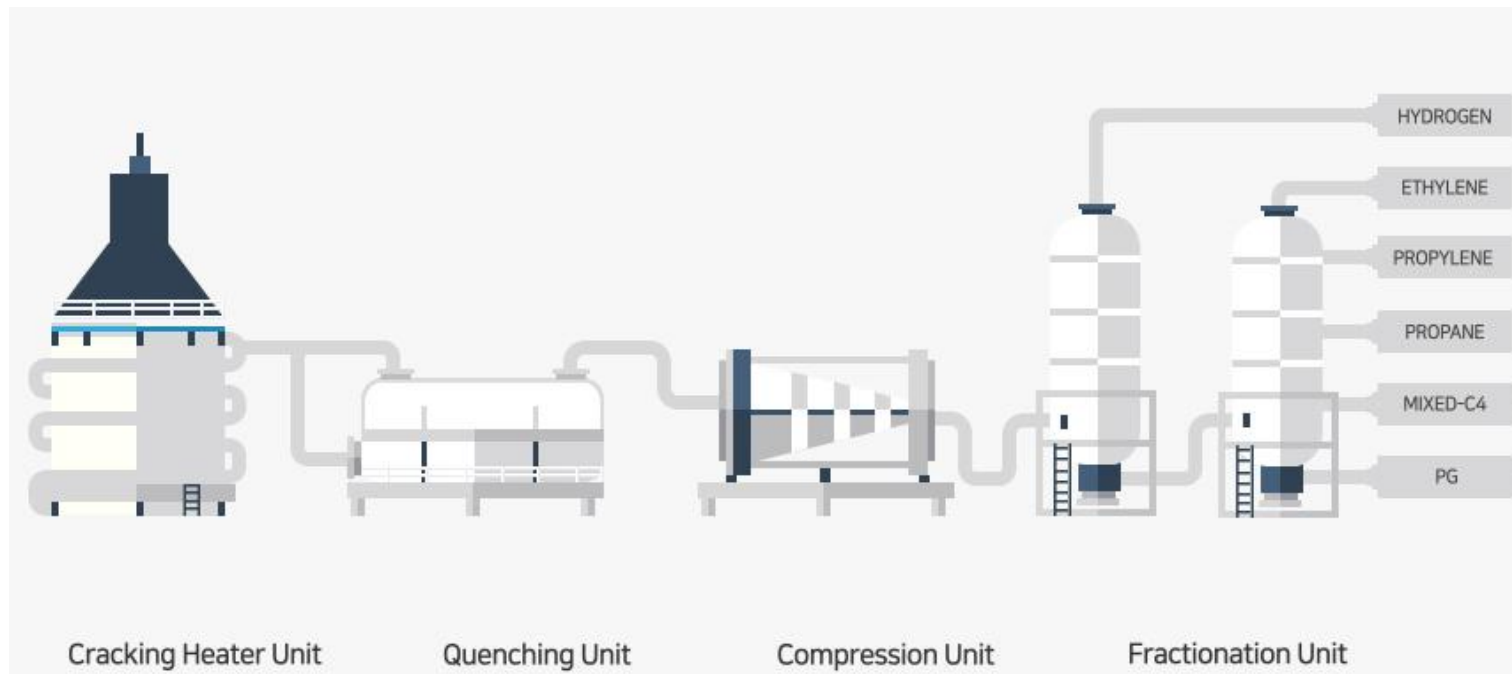


<Source: <https://www.yncc.co.kr/en/product/factory/3/ethylene.do>>

Byproduct Hydrogen

□ Chloralkali Process

Electrolysis of sodium chloride (NaCl) solutions (e.g., brine (high-conc. solution of salt in water))

- $2\text{NaCl} + \text{H}_2\text{O} \rightarrow \text{Cl}_2 + \text{H}_2 + 2\text{NaOH}$
- 97 Mt of Cl_2 were prepared in 2022 (35 Mt in 1987)
- To produce 1 t of NaOH, 2500 kWh of electricity is used with ~25 kg of H_2 as a byproduct

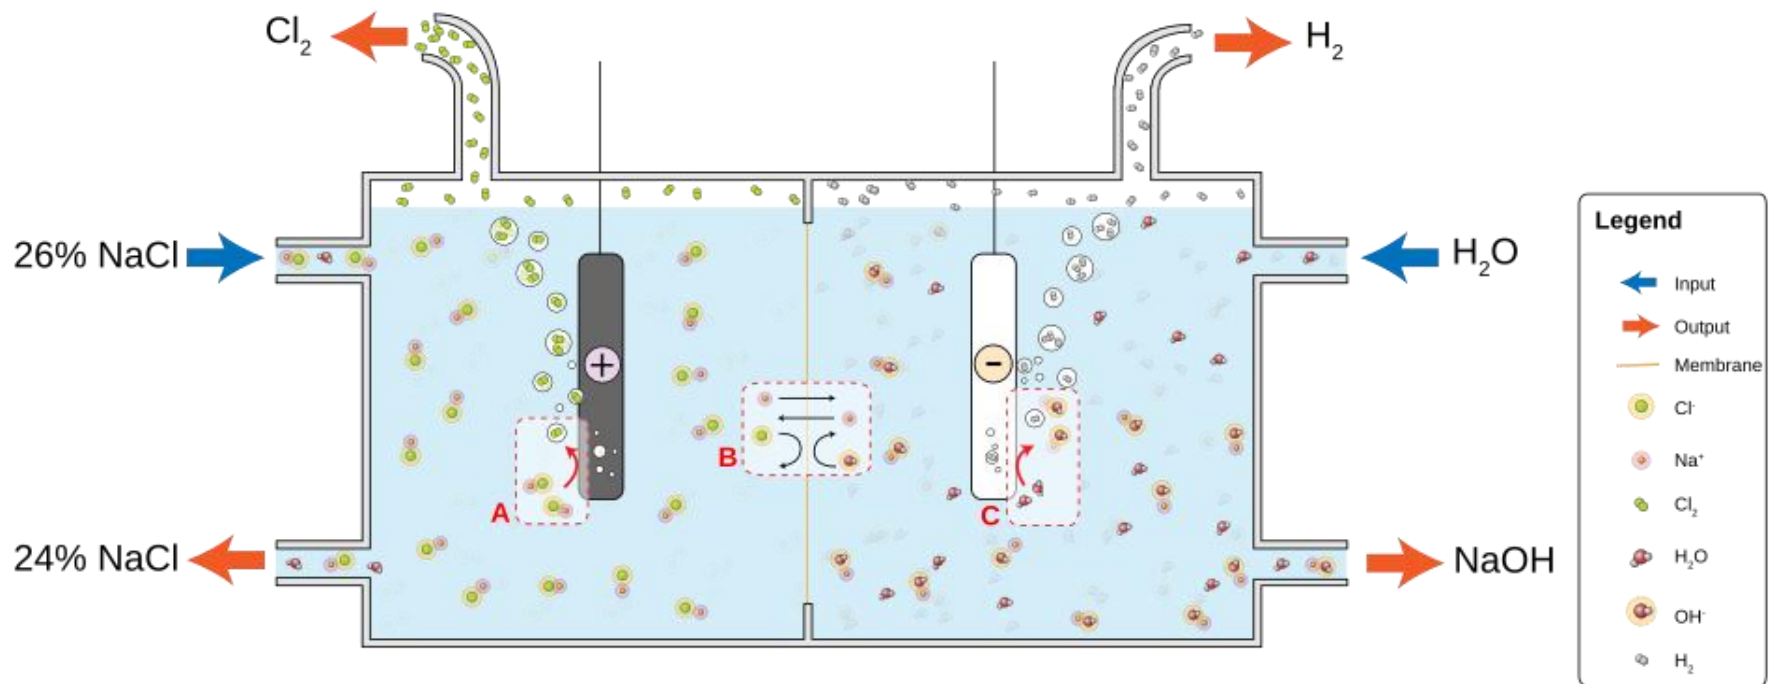


<Source: https://en.wikipedia.org/wiki/Chloralkali_process>

Biohydrogen

❑ Thermochemical Process (Biogas Reforming)

Obtained by reforming biogas, which is a mixture produced by microorganisms decomposing organic waste under anaerobic conditions (oxygen-free conditions)

- Upgrades raw biogas to high-purity CH_4 first by removing CO_2 and impurities, followed by SMR
- Emits CO_2 during the reforming step, requiring CCUS integration for zero-carbon certification
- e.g., Hyundai Motor, Hanwha E&C

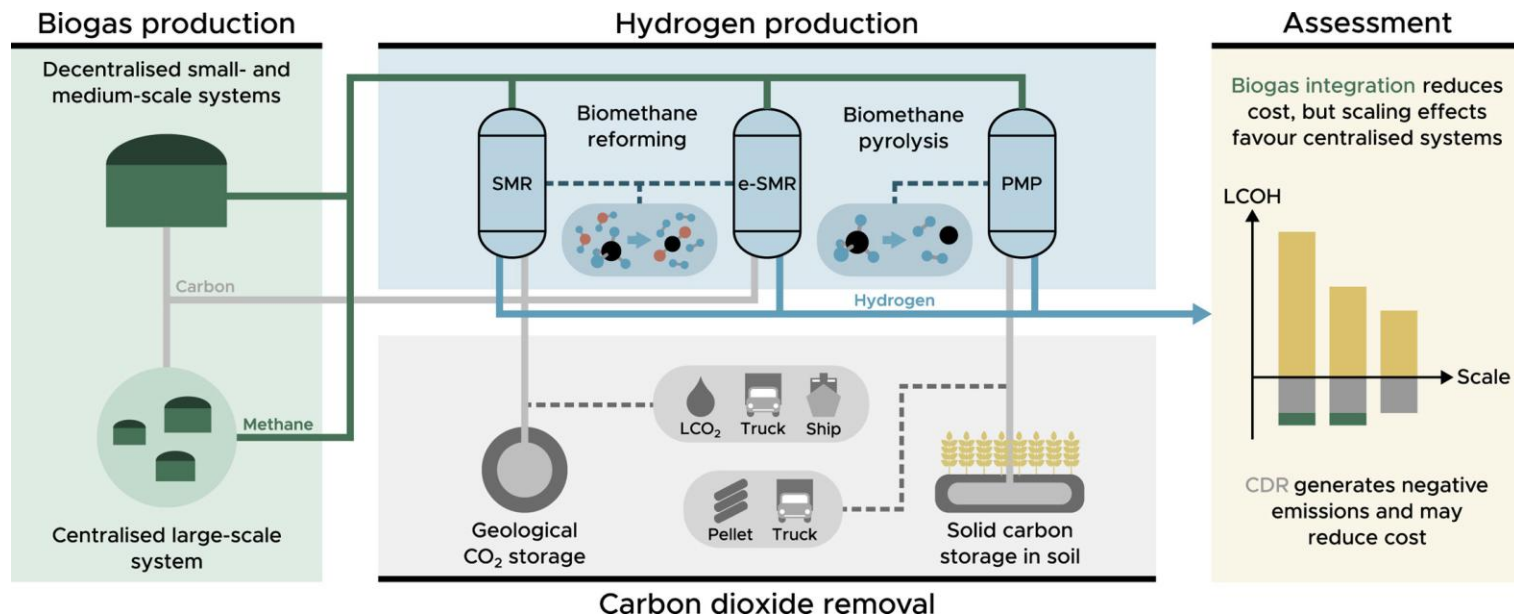


Biohydrogen

❑ Thermochemical Process (Biomass Gasification)

A technology pathway that uses a controlled process involving heat, steam, and oxygen to convert biomass to hydrogen and other products at high temperature (>700 °C), without combustion

- (Step 1) Pyrolysis of biomass to volatiles
- (Step 2) $C_nH_mO_k + (n-k)H_2O \rightarrow nCO + (n+0.5m-k)H_2$
- Subsequently, water-gas shift reaction occurs ($CO + H_2O \rightarrow CO_2 + H_2$ ($\Delta H^\circ = -41.2 \text{ kJ mol}^{-1}$))

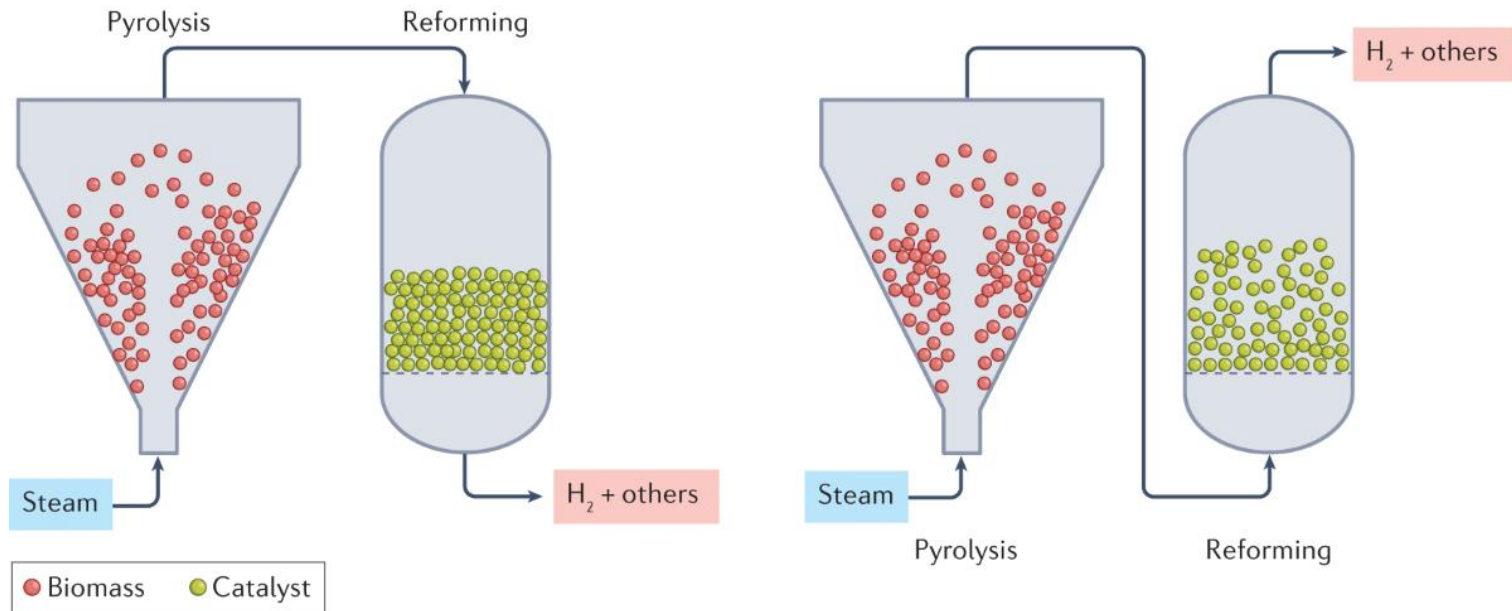


Biohydrogen

□ Biological Process

Biologically produced H_2 using microorganisms or biological catalysts (bacteria, microalgae, enzymes)

- Utilizes renewable organic waste and biomass at low temperatures/pressures, enabling a zero/carbon-negative footprint
- Low conversion eff. and slow production speeds due to limited thermodynamic boundaries and byproduct accumulation

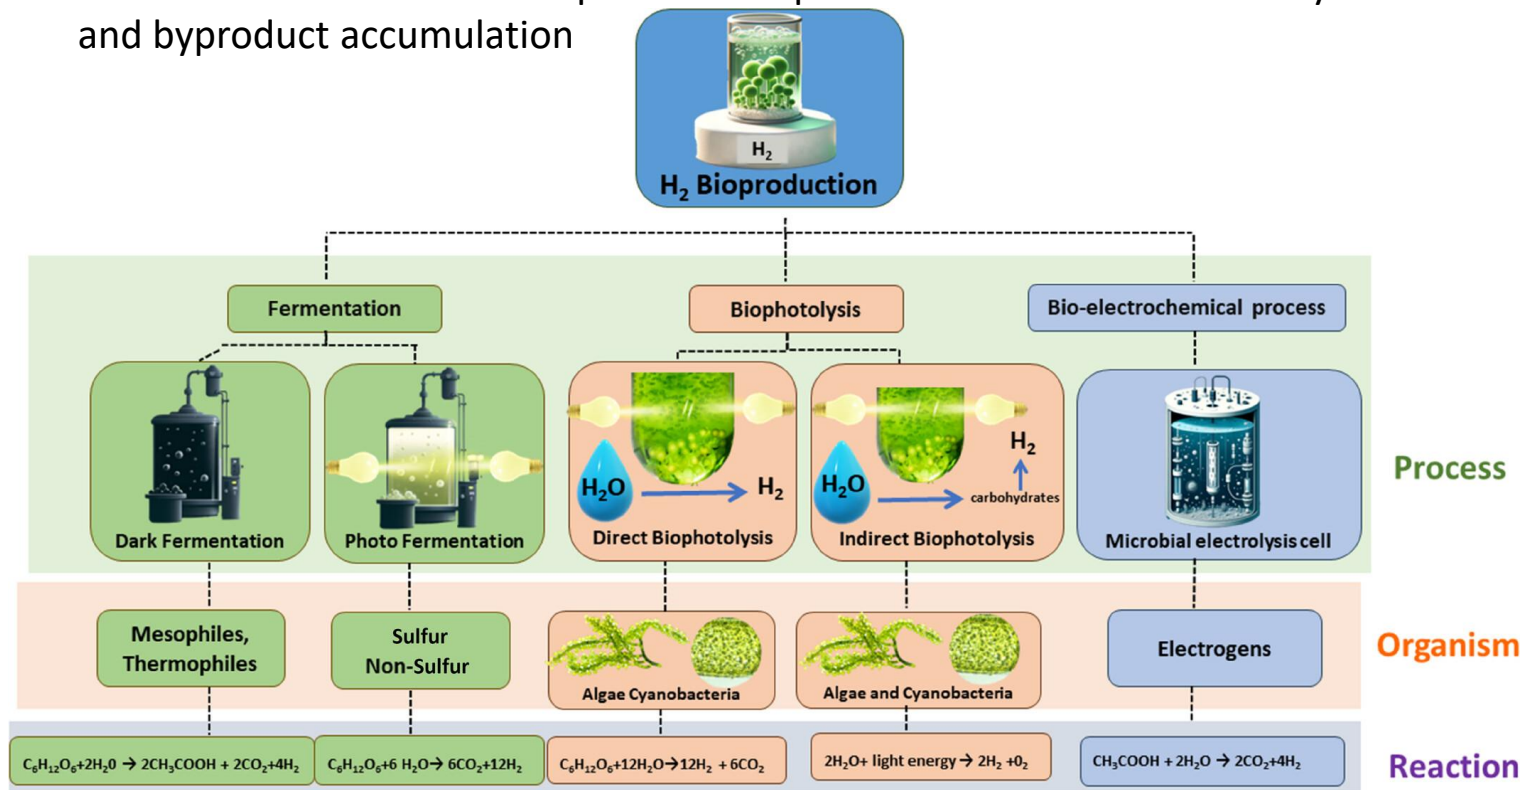

Assignment (~15th Sep)

□ Why Is Hydrogen So Scarce in Earth's Atmosphere?

H₂ makes up only about 0.55 ppm of Earth's atmosphere (See Slide #11). Even though Earth is known as the "water planet," atmospheric H₂ is extremely scarce. A common explanation often states: *"Because H₂ is the lightest molecule, it continually rises through the atmosphere due to buoyancy and eventually escapes into outer space."*

Is this explanation physically accurate? If not, what is the correct scientific mechanism behind the low concentration and escape of H₂ from Earth's atmosphere?

(Hint 1)

A helium balloon floats because surrounding air pushes it up. But what happens to a balloon when there is no air left to push it? Can "buoyancy" kick something entirely out into space?

(Hint 2)

Below 100 km, the Earth's atmosphere is constantly stirred by strong winds and turbulence. Does H₂ really rise to the top by itself?

(Hint 3)

Consider the Maxwell–Boltzmann distribution for root-mean-square speed ($v_{\text{rms}} = \sqrt{3k_b T/m}$)^{0.5} vs. Earth's escape velocity $v_{\text{esc}} = 11.2 \text{ km s}^{-1}$ (k_b : Boltzmann constant, T : Temperature, m : mass)

End of Document