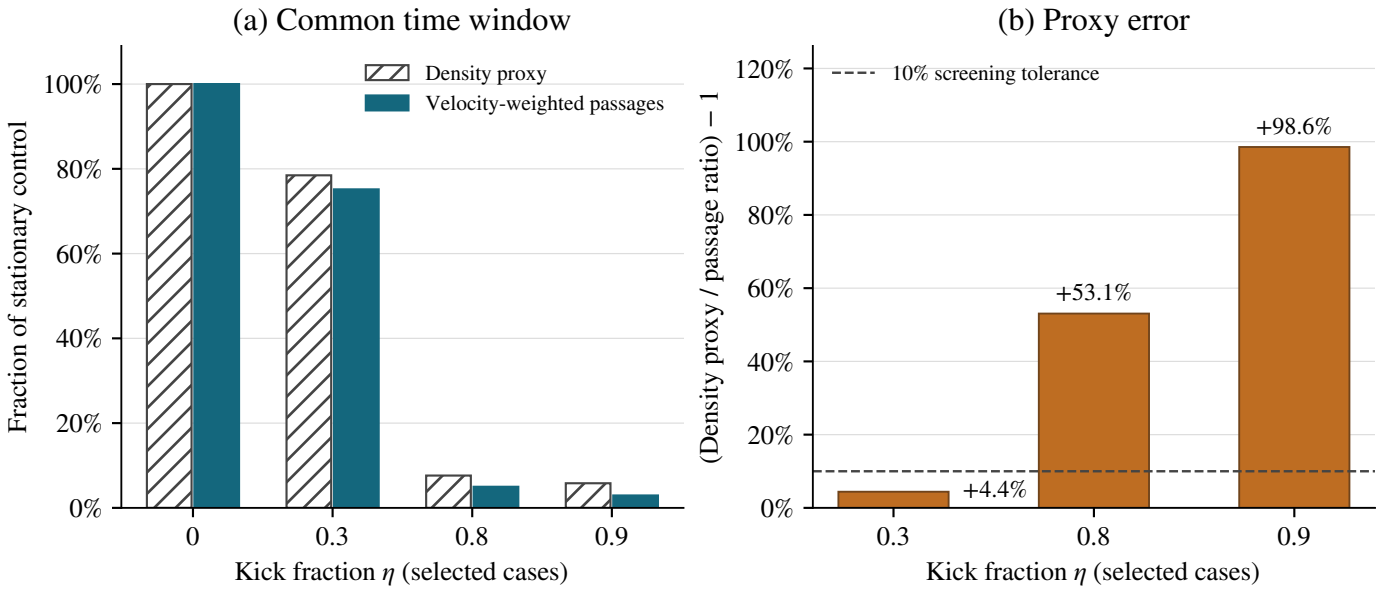
(a) Common time window
Density proxy
Velocity-weighted passages
Fraction of stationary control
100%
80%
60%
40%
20%
0%
0
0.3
0.8
0.9
Kick fraction η (selected cases)
(b) Proxy error
10% screening tolerance
(Density proxy / passage ratio) − 1
120%
100%
80%
60%
40%
20%
0%
+4.4%
+53.1%
+98.6%
0.3
0.8
0.9
Kick fraction η (selected cases)