




REV:00	DESCRIPTION	DATE
V3	修改结构和丝印	2019-12-5

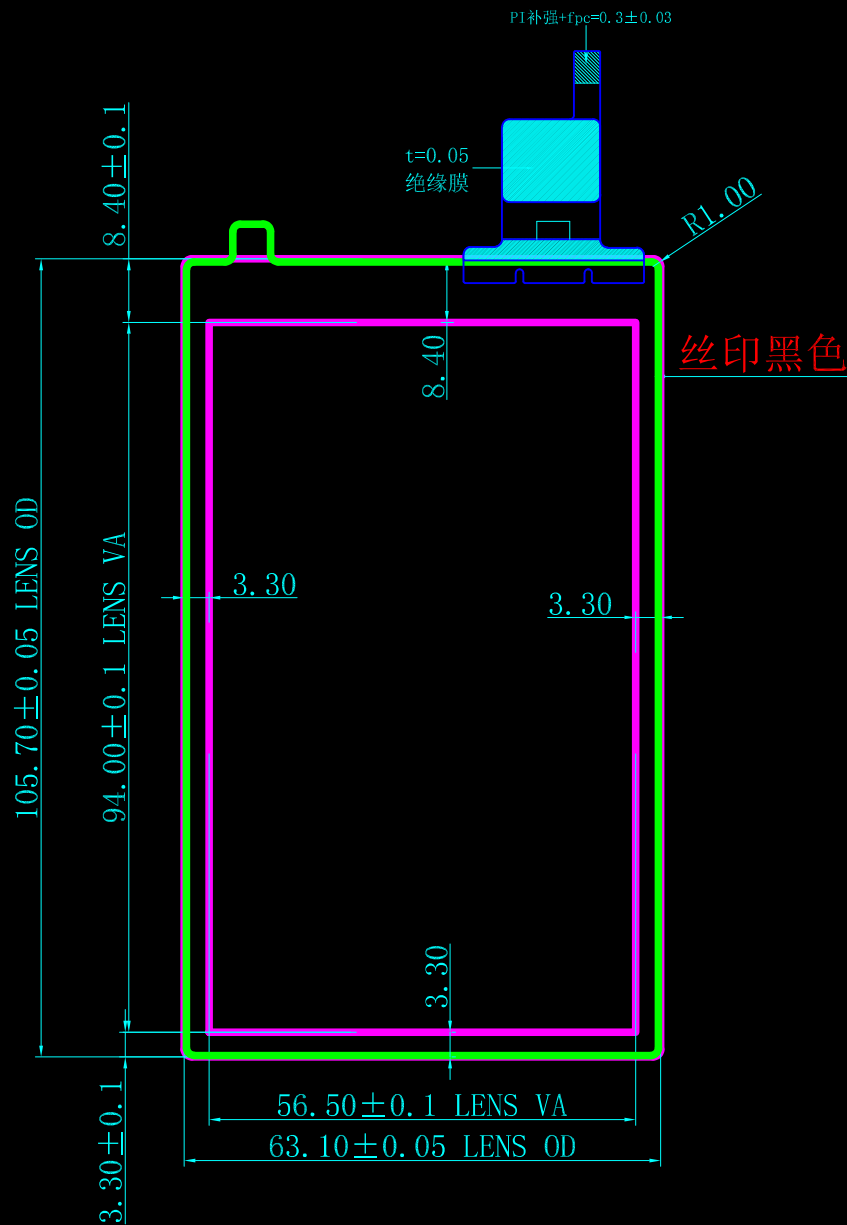

正视图

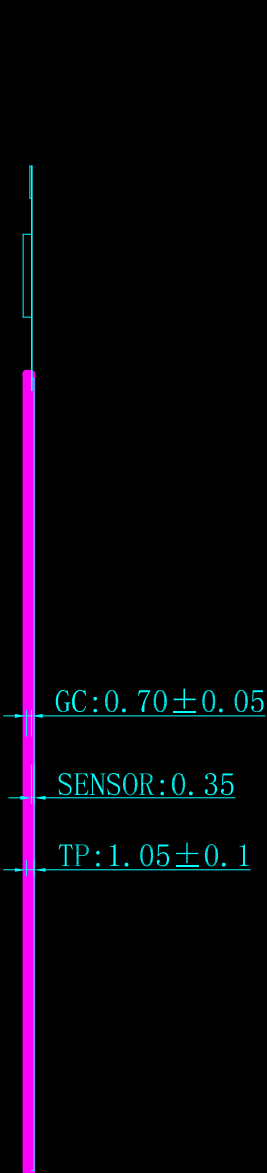

侧视图

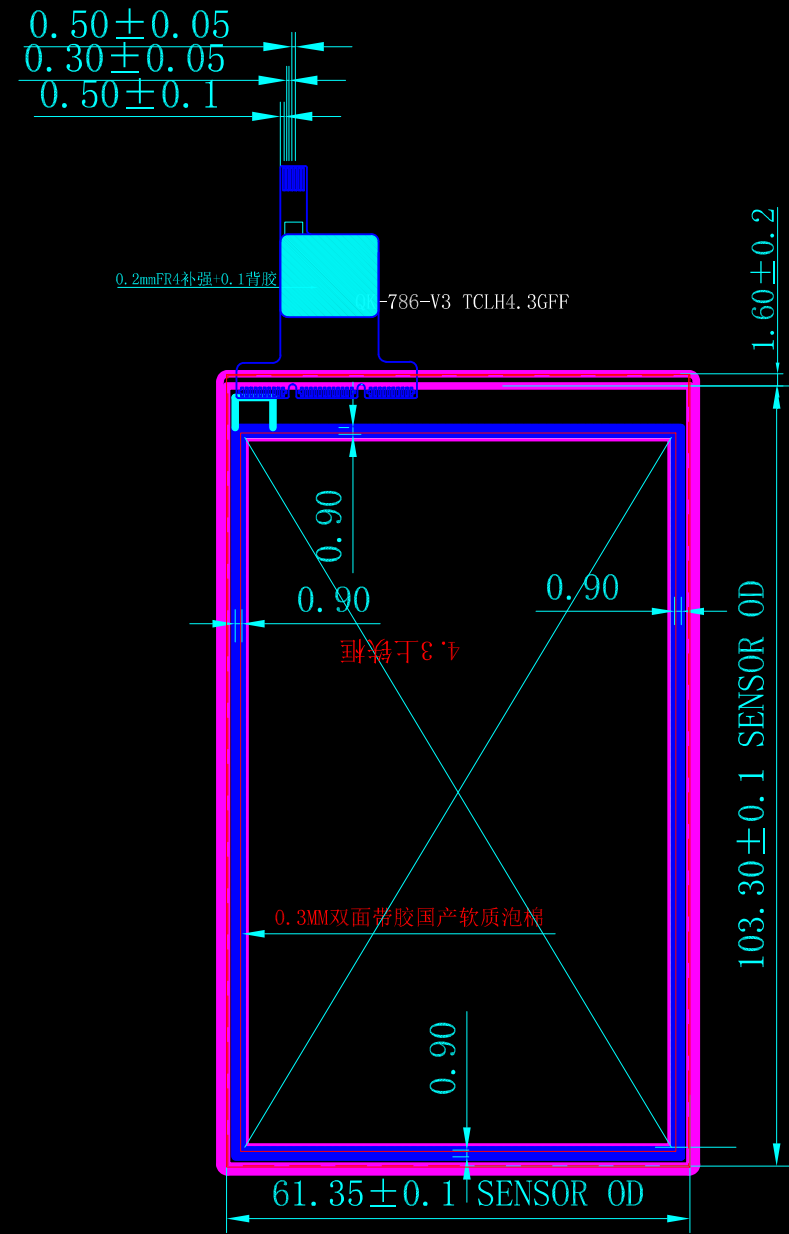

背视图

Note:
1.Driver IC:FT5436 G+FF
2.Power Voltage: 2.8V
3.Interface Signal Voltage: *V
4.Light Transmission: ≥82%
5.Surface Hardness: 7H
6.Operating Temperature: -10℃~+60℃, ≤90%RH
7.Storage Temperature: -20℃~+70℃, ≤90%RH
8.Critical Dimensions: **
Unspecified Tolerance:±0.2mm

VDDIO:1.8V	
NO	DEFINITION
1	VDD
2	RST
3	INT
4	SDA
5	SCL
6	GND

深圳市好钜润科技有限公司							
DRAWN 绘	BY: 图:	TETK	2020-03-11	TITLE ID: 产品编号:	-786	UNITS: 单 位:	MM
CHECKED 审	BY: 核:			CUSTOMER ID: 客户编号:	4. 3GFF	SCALE: 比 例:	1:1
APPROVED BY: 批	准:			MANAGE ID: 管理编号:		PAGE : 页 码:	1/1
客户确认:		确认此型号所有图纸; 签字确认:					