3 V model and sampling schematic; production mesh validation remains pending

Schematic, not a computed field
20 × 20 × 1 μm plate; c-axis +z

Other exterior surfaces and hole wall:
traction = 0; D·v = 0
Jn·v = Jp·v = 0; heat flux·v = 0

Full-domain rigid-body anchors (μm):
A=(−10,−10,−0.5): ux=uy=uz=0
B=(−10,+10,−0.5): ux=uz=0
C=(−10,−10,+0.5): ux=0

H1 plan view; H0 omits the hole

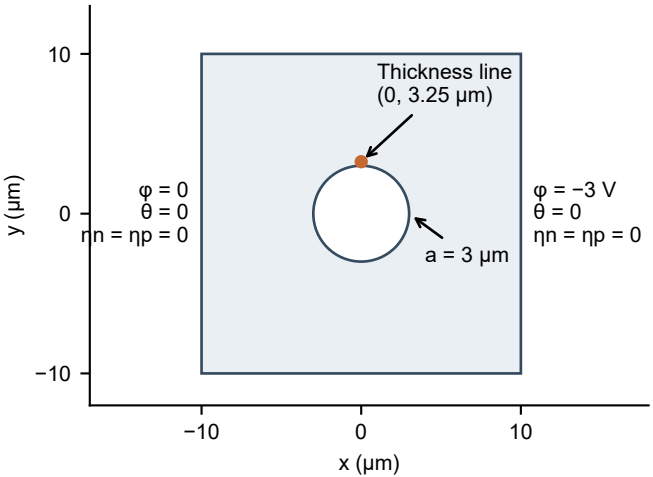
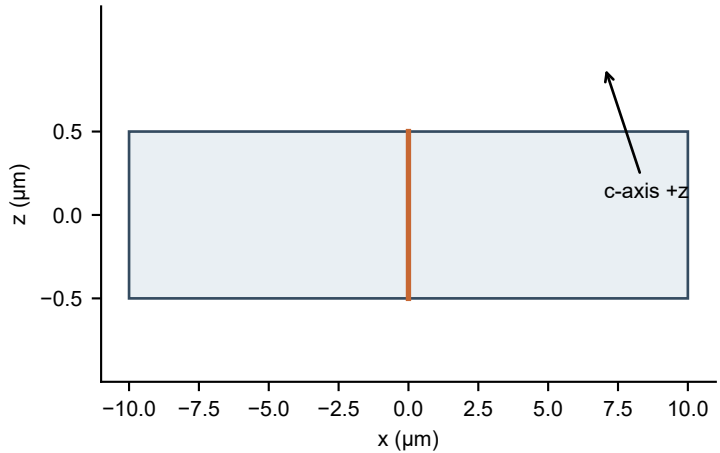
Section y=3.25 μm (outside the hole)