Wirewound Resistors, Precision Power, Surface Mount

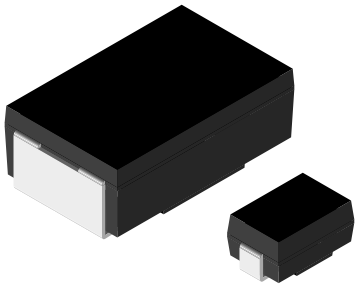

DESIGN TOOLS (click logo to get started)

3D Models Available

FEATURES

- All welded construction
- Molded encapsulation
- Wraparound terminations
- Excellent stability at different environmental conditions
- High power ratings (up to 3 W)
- Superior surge capability
- Available in non-inductive styles with Ayrton-Perry winding (WSN in lieu of WSC, maximum resistance is one-half WSC range)
- AEC-Q200 qualified (1)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

AUTOMOTIVE GRADE

Pb-free Available

e3

RoHS* Available

HALOGEN FREE Available

GREEN (5-2008) Available

Notes

- This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.
- Follow link to Overview of Automotive Grade Products for more details: www.vishay.com/doc?49924.

(1) Flame retardance test may not be applicable to some resistor technologies.

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	SIZE	POWER RATING $P_{70\,°C}$ W	RESISTANCE RANGE Ω	TOLERANCE ± %	WEIGHT (typical) g/1000 pieces	ENCAPSULATION
WSC01/2	WSC-1/2	2012	0.5	0.1 to 4.99	0.5, 1, 5	90	Epoxy
WSC0001 (2)	WSC-1	2515	1	0.1 to 2.77K	0.5, 1, 5	165	Thermoplastic (1)
WSC2515	WSC2515	2515	1	0.1 to 2.5K	0.5, 1, 5	165	Thermoplastic
WSC0002	WSC-2	4527	2	0.1 to 4.92K	0.5, 1, 5	760	Thermoplastic (1)
WSC4527	WSC4527	4527	2	0.1 to 4.92K	0.5, 1, 5	760	Thermoplastic
WSC6927	WSC6927	6927	3	0.1 to 8K	0.5, 1, 5	1675	Thermoplastic

Notes

- Part marking: 1/2 W - DALE, value; 1 W - model, value, tolerance, date code; 2 W and 3 W - DALE, model, value, tolerance, date code.

(1) As of 1/1/2010, the WSC0001 and WSC0002 are molded with thermoplastic in lieu of epoxy. Reference PCN-DR-002-2009 and PCN-DR-003-2009

(2) As of February 19, 2016, the WSC0001 was obsoleted by PCN-DR-013-2015; the WSC2515 is a drop-in replacement. You may contact your sales representative or submit an inquiry via ww2bresistors@vishay.com for supporting information.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	WSC01/2	WSC2515	WSC0002	WSC4527, WSC6927
Temperature coefficient	ppm/°C	± 50 = 1.0 Ω to 4.99 Ω; ± 90 = 0.1 Ω to 0.99 Ω	± 20 = 26.51 Ω and above; ± 50 = 1.0 Ω to 26.5 Ω; ± 90 = 0.31 Ω to 0.99 Ω; ± 150 = 0.1 Ω to 0.3 Ω	± 20 = 10.0 Ω and above; ± 50 = 1.0 Ω to 9.9 Ω; ± 90 = 0.1 Ω to 0.99 Ω	± 20 = 10 Ω and above; ± 50 = 1.0 Ω to 9.9 Ω; ± 90 = 0.31 Ω to 0.99 Ω; ± 150 = 0.1 Ω to 0.3 Ω
Dielectric withstanding voltage	V_{AC}	> 500			
Insulation resistance	Ω	> 10^9			
Operating temperature range	°C	-65 to +175	-65 to +275		
Maximum working voltage	V	$(P \times R)^{1/2}$			

GLOBAL PART NUMBER INFORMATION

Global Part Numbering example: WSC2515R7000FEA (visit www.vishay.net Vishay Dale parts numbering manual for all options)

W	S	C	2	5	1	5	R	7	0	0	0	F	E	A		

GLOBAL MODEL	SIZE	VALUE	TOLERANCE	PACKAGING	SPECIAL
WSC **WSN**	**01/2** **2515** **0002** **4527** **6927**	**R** = decimal **K** = thousand **R7000** = 0.70 Ω **1K500** = 1.5 kΩ	**D** = ± 0.5 % **F** = ± 1.0 % **G** = ± 2.0 % **H** = ± 3.0 % **J** = ± 5.0 % **K** = ± 10 %	**EA** = lead (Pb)-free, tape / reel **EK** = lead (Pb)-free, bulk **TA** = tin / lead, tape / reel (R86) **BA** = tin / lead, bulk (B43)	(dash number) (up to 2 digits) from **1 to 99** as applicable

Note

- Packaging code: EB (lead (Pb)-free) and TB (tin / lead) are non-standard packaging codes designating 1000 piece reels. These non-standard packaging codes are identical to our standard EA (lead (Pb)-free) and TA (tin / lead), except that they have a package quantity of 1000 pieces.

DIMENSIONS in inches (millimeters)

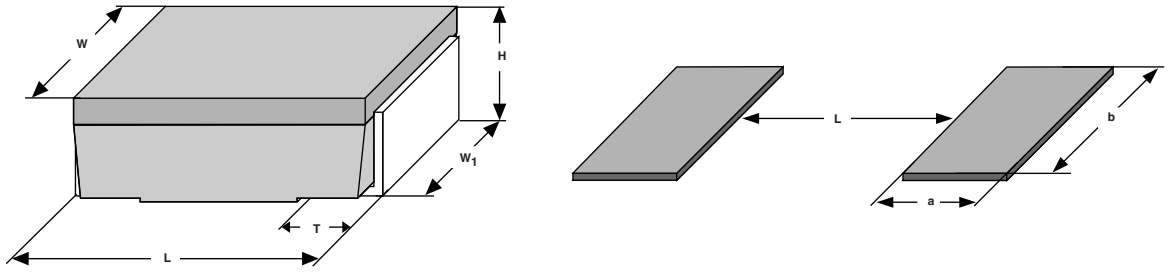

GLOBAL MODEL	DIMENSIONS					SOLDER PAD DIMENSIONS		
	L	H	T	W	W_1	a	b	L
WSC01/2	0.200 ± 0.020 (5.08 ± 0.508)	0.096 ± 0.015 (2.44 ± 0.381)	0.040 ± 0.010 (1.02 ± 0.254)	0.125 ± 0.005 (3.18 ± 0.127)	0.050 ± 0.010 (1.27 ± 0.254)	0.085 (2.16)	0.070 (1.78)	0.080 (2.03)
WSC2515	0.250 ± 0.020 (6.35 ± 0.508)	0.110 ± 0.015 (2.79 ± 0.381)	0.045 ± 0.010 (1.14 ± 0.254)	0.150 ± 0.005 (3.81 ± 0.127)	0.098 ± 0.005 (2.49 ± 0.127)	0.090 (2.29)	0.115 (2.92)	0.120 (3.05)
WSC0002	0.455 ± 0.020 (11.56 ± 0.508)	0.167 ± 0.010 (4.24 ± 0.254)	0.100 ± 0.010 (2.54 ± 0.254)	0.275 ± 0.005 (6.98 ± 0.127)	0.215 ± 0.005 (5.46 ± 0.127)	0.155 (3.94)	0.230 (5.84)	0.205 (5.21)
WSC4527	0.455 ± 0.020 (11.56 ± 0.508)	0.167 ± 0.010 (4.24 ± 0.254)	0.100 ± 0.010 (2.54 ± 0.254)	0.275 ± 0.005 (6.98 ± 0.127)	0.215 ± 0.005 (5.46 ± 0.127)	0.155 (3.94)	0.230 (5.84)	0.205 (5.21)
WSC6927	0.690 ± 0.032 (17.53 ± 0.813)	0.280 ± 0.015 (7.11 ± 0.381)	0.100 ± 0.010 (2.54 ± 0.254)	0.275 ± 0.005 (6.98 ± 0.127)	0.215 ± 0.015 (5.46 ± 0.381)	0.155 (3.94)	0.235 (5.97)	0.470 (11.94)

Notes

- 3D models available: www.vishay.com/doc?30328.
- Surface mount solder profile recommendations: www.vishay.com/doc?31052.
- Refer to WSC, WSN conversion guide for detailed construction drawings: www.vishay.com/doc?49616.

TEMPERATURE RISE

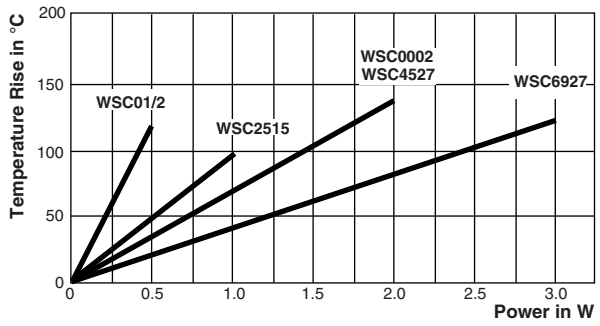

DERATING

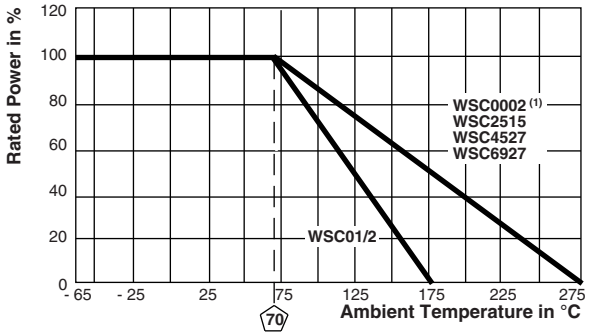

Note

(1) As of 1/1/2010, WSC0002 will be molded with thermoplastic and have the higher 275 °C temperature derating.

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal shock	-55 °C to +150 °C, 1000 cycles, 15 min at each extreme	± 0.5 % + 0.05 Ω
Short time overload	5 x rated power for 5 s	± 0.2 % + 0.05 Ω
Low temperature storage	-65 °C for 24 h	± 0.2 % + 0.05 Ω
High temperature exposure	1000 h at + 275 °C (+175 °C for WSC01/2)	± 0.5 % + 0.05 Ω
Bias humidity	+85 °C, 85 % RH, 10 % bias, 1000 h	± 0.2 % + 0.05 Ω
Mechanical shock	100 *g*'s for 6 ms, 5 pulses	± 0.1 % + 0.05 Ω
Vibration	Frequency varied 10 Hz to 500 Hz in 1 min, 3 directions, 9 h	± 0.1 % + 0.05 Ω
Load life	1000 h at rated power, +70 °C, 1.5 h "ON", 0.5 h "OFF"	± 1.0 % + 0.05 Ω
Resistance to solder heat	+260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence	± 0.5 % + 0.05 Ω

PACKAGING				
MODEL	REEL			
	TAPE WIDTH	DIAMETER	PIECES/REEL	CODE
WSC01/2	12 mm/embossed plastic	330 mm/13"	2000	EA/TA
WSC2515	16 mm/embossed plastic	330 mm/13"	2000	EA/TA
WSC0002, WSC4527	24 mm/embossed plastic	330 mm/13"	1200	EA/TA
WSC6927	32 mm/embossed plastic	330 mm/13”	725	EA/TA

Notes

- Embossed carrier tape per EIA-481.
- Additional packaging details at www.vishay.com/doc?20051.

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

WSC00024K020FTA WSC01\22R000FTB WSC000130R10FBA WSC000262R00FTA WSC0002174R0FTA
WSC0002150R0FTA WSC0002154R0FTA WSC000227R40FTA WSC000225R50FTA WSC01\2R4000FTB
WSC01\21R210FTB WSC45272K000FEB WSC0001R2500FTB WSC2515243R0FTA WSC00021K500FTA
WSC00022R200FTA WSC00022R000FTA WSC00022R700FTA WSC00022R800FTA WSC00022R500FTA
WSC00022R430FTA WSC00022R490FTA WSC00022R740FTA WSC0002200R0FTA WSC000122R00FTB
WSC000115R00FTB WSC4527400R0FEB WSC000120R00FTB WSC000147R00FBA WSC000113R70FBA
WSC452720R00DBA WSC45271R000FEB WSC000249R90FBA WSC01\21R000FTB WSC00024K530FTA
WSC25151R000FEB WSC45275R000FEB WSC000225R00FTA WSC000222R00FTA WSC000224R00FTA
WSC0001180R0FTB WSC000220R00FTA WSC00015R110FTB WSC01\22R700FTB WSC01\22R300FTB
WSC01\2R1500FTB WSC00021K000FTA WSC00022K000FTA WSC000213R70FTA WSC00021K740FTA
WSC00023K740FTA WSC000241R00JTA WSC000211R00JTA WSC00021R210FTA WSC0002R5000FTA
WSC45271K000FEB WSC000216R20FTA WSC0002820R0FTA WSC00028R200FTA WSC0002866R0FTA
WSC00011K000FTB WSC00026R800FTA WSC00026R900FTA WSC00026R000FTA WSC0002604R0FTA
WSC0002649R0FTA WSC0002665R0FTA WSC000222R10FTA WSC000210R40FTA WSC00021K210FTA
WSC00022K340FTA WSC2515R1000FEB WSC251510R00FEB WSC69271K000FEA WSC00023R010FTA
WSC000240R20FTA WSC00011K500FTB WSC000290R90FTA WSN00014R700FBA WSC000239R00FTA
WSC000230R00FTA WSC000275R00FTA WSC00024R120FTA WSC01\2R5000FTB WSC01\2R1000FTB
WSC01\2R2000FTB WSC01\2R3000FTB WSC45272R000FEB WSC01\23R900FTB WSC000239R20FTA
WSC00024K750FTA WSC01\2R3010FTB WSC01\21R000FEB WSC452720R00FEB WSC25151K000FEB
WSC0002820R0JTA WSC0002R1500FTA WSC0001R2490FEB WSC25155R110FEB WSC251549R90FEB