

CARBENTRA


CARBENTRA-P16-EVT-B / ORIGINAL MECHANICAL DEVELOPMENT

MANUFACTURING + ENERGIZATION HOLD

Reference dimensions only | GB 1002 gauge validation open

01 FRONT / FEMALE

Looking along -Z: +X is viewer right

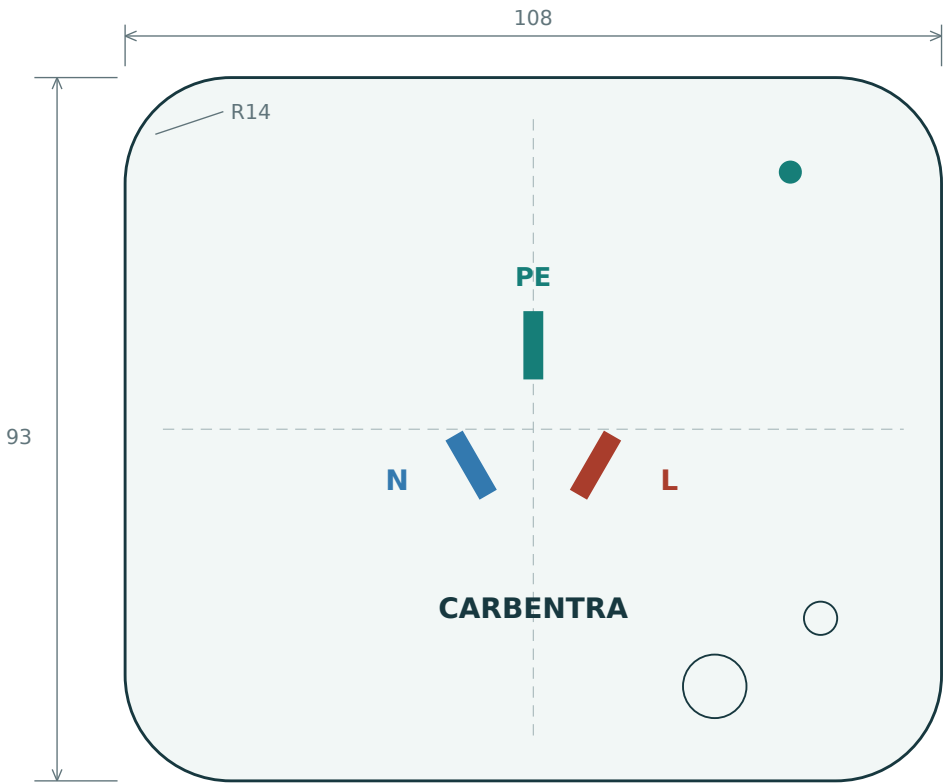


L RIGHT / N LEFT

Nominal housing outline - no supplier body copied

Apertures: 2.4 x 8.8 nominal; controls shown at design coordinates

02 REAR / MALE

Looking along +Z: +X is viewer left

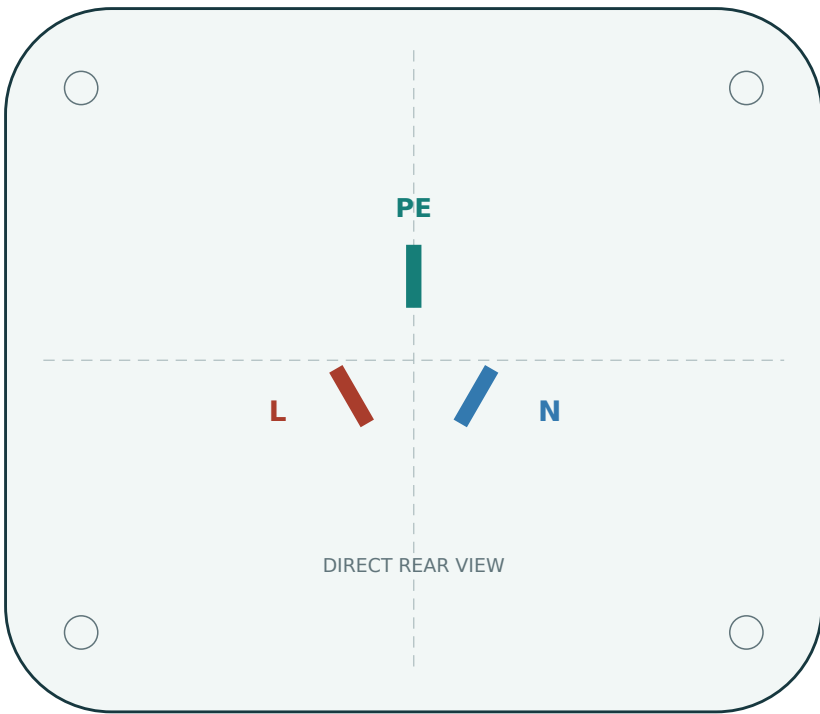


L LEFT / N RIGHT

Nominal housing outline - no supplier body copied

04 AXIAL PROJECTIONS

Diagrammatic side layout, not a BRep section

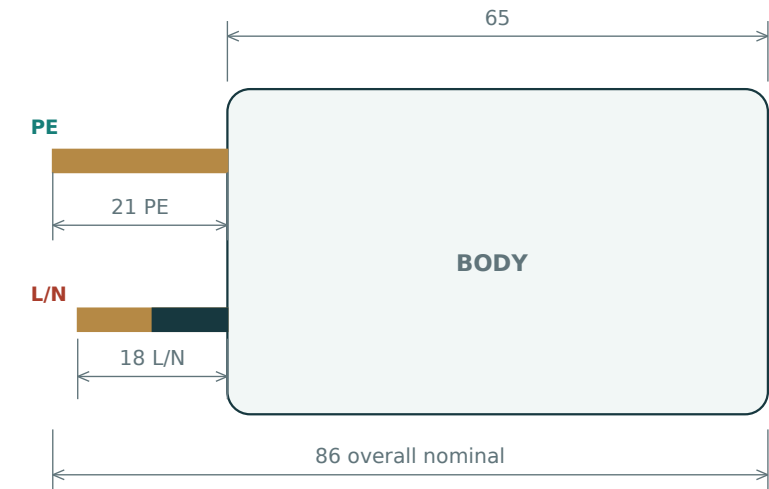

z = -21 PE / -18 L,N / 0 rear / +65 front

MALE BLADE REFERENCE

Width: 8.10 (+0.00 / -0.22)
Thickness: 1.80 (+0.15 / -0.05)
PE projection: 21 nominal
L/N projection: 18 nominal
Live sleeve length: 9.0 (+0.5 / -0.0)
Sleeve outer envelope and gauges: OPEN

PACKAGE + RELEASE NOTES


Nominal housing: 108 x 93 x 65, R14.
PCB: 100 x 85 x 1.6, R10; bottom z11.5.
4 x D3.2 mounts at (+/-44, +/-36).
Two edge notches retained for power paths.
Original enclosure and internal architecture.
No final collision, thermal, mass, torque,
contact or certification result is claimed.
Finish ring may add 0.08 to nominal W/H.
All unspecified tolerances remain OPEN.

REFERENCE + INTERPRETATION

Volex 2025 GB16C, catalogue PDF p36:
mating-interface cross-check only.
Supplier approvals do not apply to CARBENTRA.
GB 1002-2024 licensed dimensions and gauges
must be checked before interface release.

03 INTERFACE DATUM DETAIL

Front view | 2.5:1 nominal detail | units mm

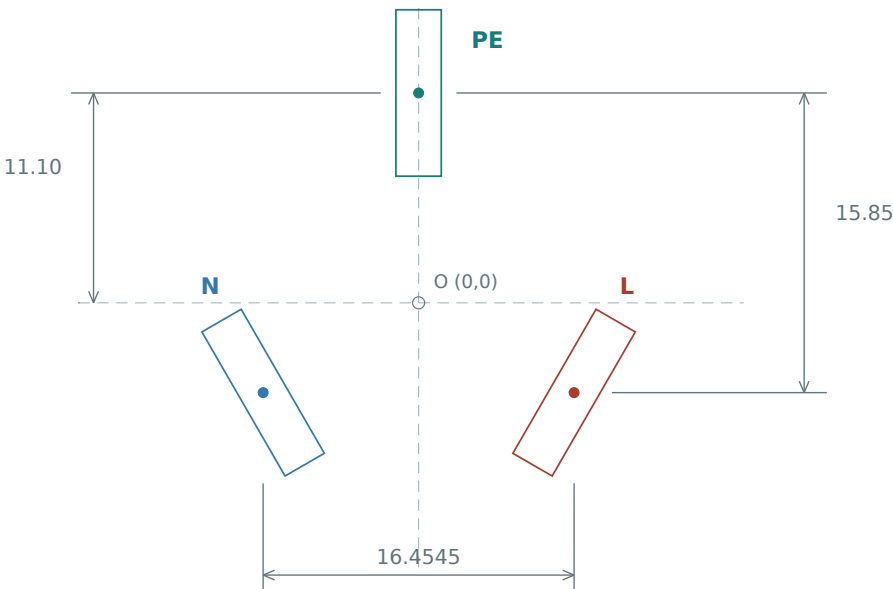

N long axis +30 deg; L long axis -30 deg about +Z from +Y

Do not use this drawing as a plug/socket gauge

WORLD DATUM COORDINATES

NAME	X	Y	AXIS
PE	0	+11.1000	0 deg
L	+8.2272413	-4.7500	-30 deg
N	-8.2272413	-4.7500	+30 deg

F = 9.5; X = +/-F cos(30 deg); Y = -F sin(30 deg)
PE is 11.1 above the common datum O.
The source drawing's 2.2 body-reference offset
is not added to this original assembly datum.

Front apertures are design inputs, not qualified
female gauge geometry or contact-force proof.
Center distances do not define safety clearance.