


DEVELOPMENT RELEASE – NOT FOR FABRICATION OR ENERGIZATION


Off-board: coordinated branch fuse + thermal cutoff + protected auxiliary fuse. PE is continuous stamped/wired path, NEVER switched.

J3 accepts only separately isolated 3.3V logic. No direct connection to mains-referenced meter. K1 load-category qualification OPEN.


01 ISOLATED INPUT



02 BUCK CONVERTER

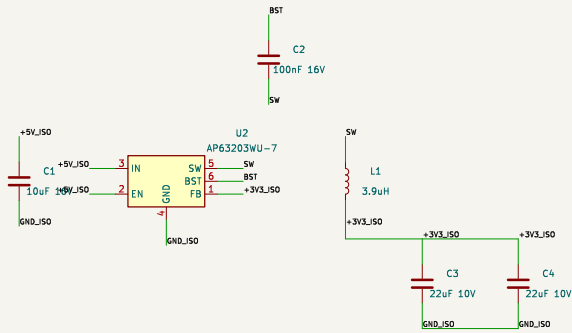


03 LOAD RELAY + DRIVER

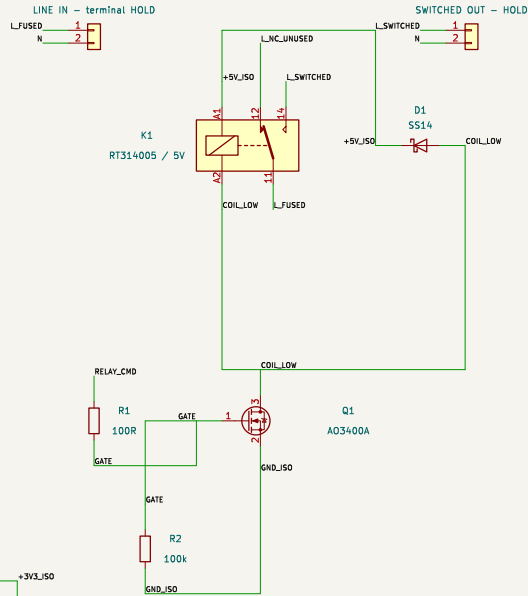


04 EDGE CONTROLLER



07 ISOLATED METER PORT



05 LOCAL CONTROLS



06 BOARD TEMPERATURE

