



CARBONMIRROR / CM-S16

Unified campus smart socket | Mechanical general arrangement | Development revision A

FABRICATION + ENERGIZATION |

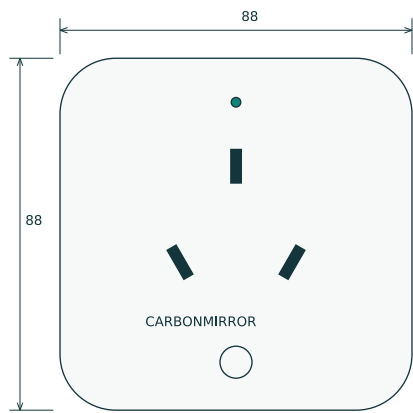

FRONT / looking toward -Z
R14 envelope; 3 apertures only

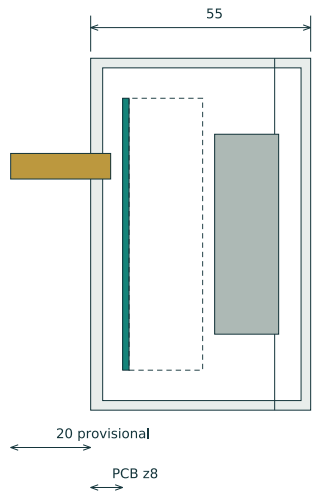

- +Z front face
- z55 exterior
- z52.6 lid underside
- z48 shutter envelope
- z31 carrier underside
- z28 PCB component ceiling
- z9.6 PCB top
- z8 PCB bottom
- z0 rear plane

SIDE / nominal stack-up layout
PCB components max z28
Carrier starts z31
Front wall 2.4; rear floor 3; split z46

INTERFACE + ASSEMBLY CONTROL

1. Nominal dimensions in mm. Drawing is a design input, not a manufacturing release.
2. Target: 220 VAC, single 16 A class three-pin connection. No 10 A or universal compatibility.
3. Pin/hole gauge geometry, contact force and material selection remain unverified.
4. PCB: 72 x 68 x 1.6; four D3.2 holes at global (+/-31, +/-29).
5. Carrier is captured on rear-shell ledges by front-lid lugs; no posts pierce the PCB.
6. Four rear-access screw axes: (+/-38, +/-24). Thread/torque design is unresolved.
7. PE conductor bypasses switching electronics. Geometric continuity is not a resistance test.
8. Coupled shutter is an envelope; spring, dual-actuation interlock and probe tests pending.
9. Main fuse, thermal cutoff, auxiliary fuse and wiring modeled; ratings/termination unqualified.
10. No tolerance, flammability, dielectric, temperature-rise, endurance or certification approval.