


CARBENTRA

CARBENTRA-P16-EVT-B / ORIGINAL MECHANICAL DEVELOPMENT

01 FRONT / FEMALE

Looking along -Z: +X is viewer right

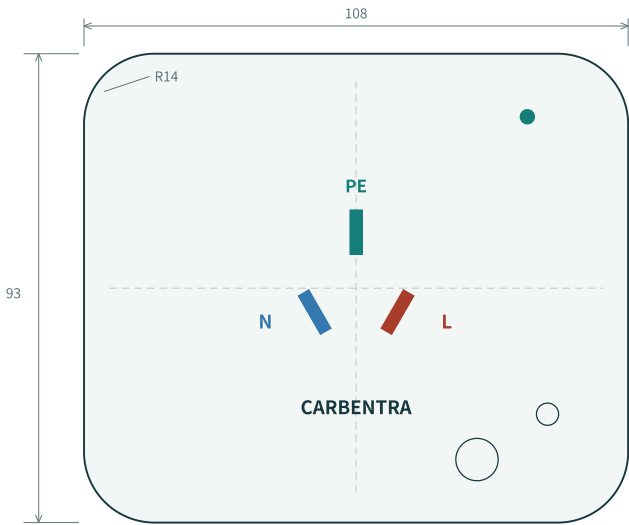


L RIGHT / N LEFT

Nominal housing outline - no supplier body copied

Apertures: 2.4 x 8.8 nominal; controls shown at design coordinates

02 REAR / MALE

Looking along +Z: +X is viewer left

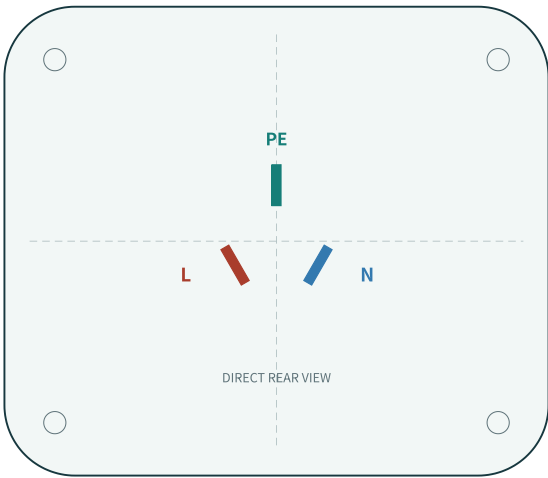


L LEFT / N RIGHT

Nominal housing outline - no supplier body copied

03 INTERFACE DATUM DETAIL

Front view | 2.5:1 nominal detail | units mm

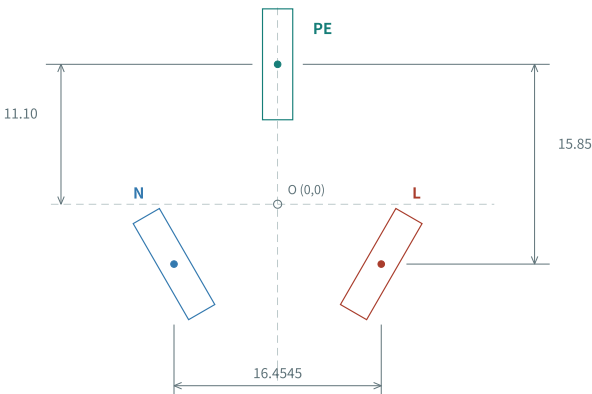

N long axis +30 deg; L long axis -30 deg about +Z from +Y

Do not use this drawing as a plug/socket gauge

WORLD DATUM COORDINATES

NAME	X	Y	AXIS
PE	0	+11.1000	0 deg
L	+8.2272413	-4.7500	-30 deg
N	-8.2272413	-4.7500	+30 deg

$F = 9.5$; $X = \pm F \cos(30 \text{ deg})$; $Y = -F \sin(30 \text{ deg})$

PE is 11.1 above the common datum O.

The source drawing's 2.2 body-reference offset is not added to this original assembly datum.

Front apertures are design inputs, not qualified female gauge geometry or contact-force proof. Center distances do not define safety clearance.

CARBENTRA-P16-EVT-B | 2026-09-30 | Original face-view polarity control

Source: design_parameters.json + socket_b_features.py; Volex interface cross-check. Source links and release gates in docs/README.md.