
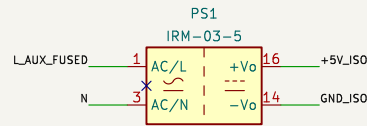


DEVELOPMENT RELEASE – NOT FOR FABRICATION OR ENERGIZATION


Off-board: coordinated branch fuse + thermal cutoff + protected auxiliary fuse. PE is continuous stamped/wired path, NEVER switched.

J3 accepts only separately isolated 3.3V logic. No direct connection to mains-referenced meter. K1 load-category qualification OPEN.


01 ISOLATED INPUT




02 BUCK CONVERTER

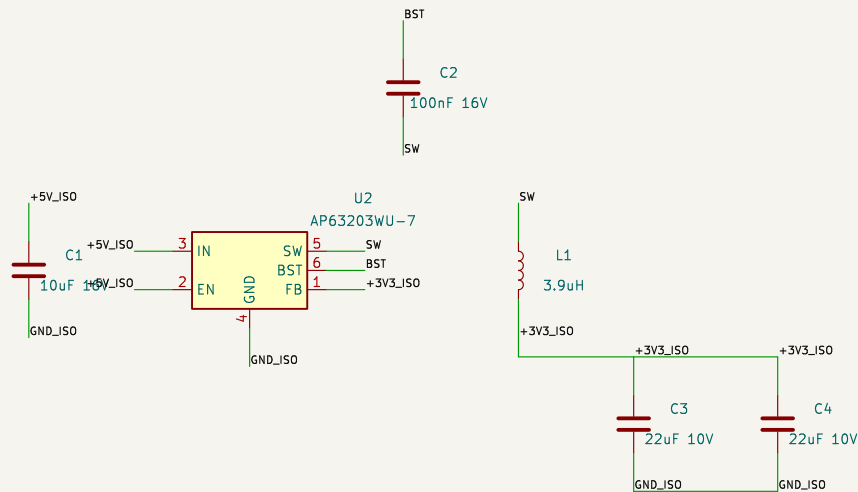




03 LOAD RELAY + DRIVER

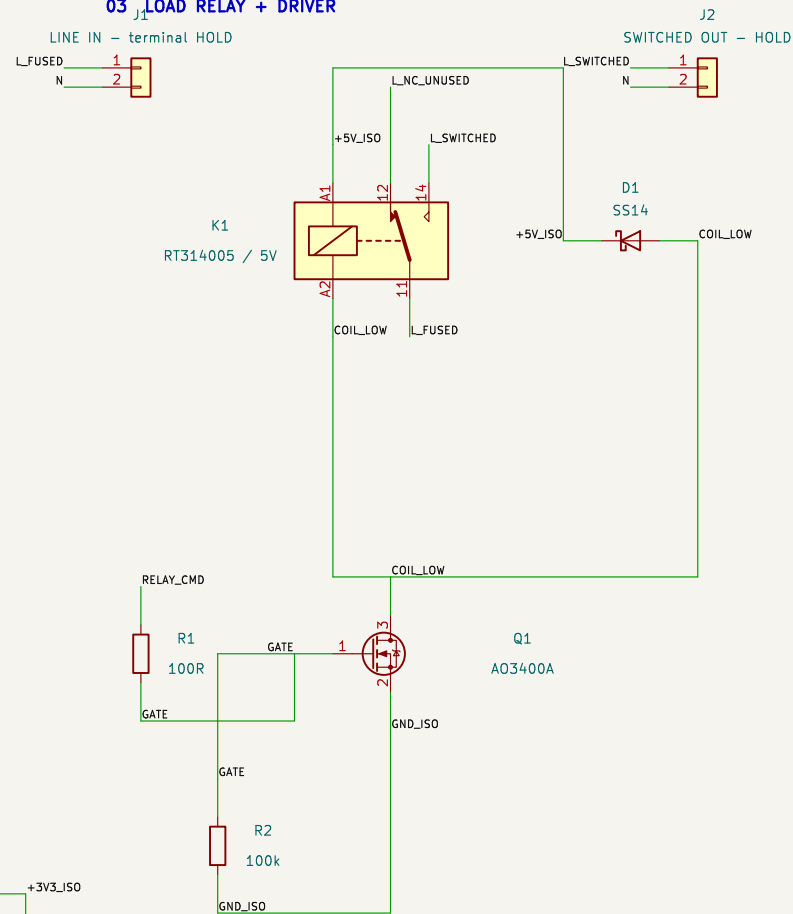


05 LOCAL CONTROLS

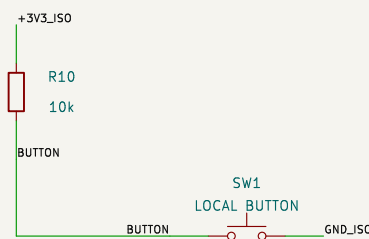


07 ISOLATED METER PORT

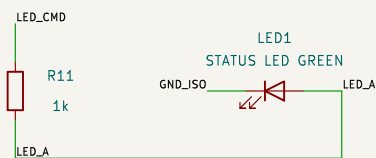

04 EDGE CONTROLLER

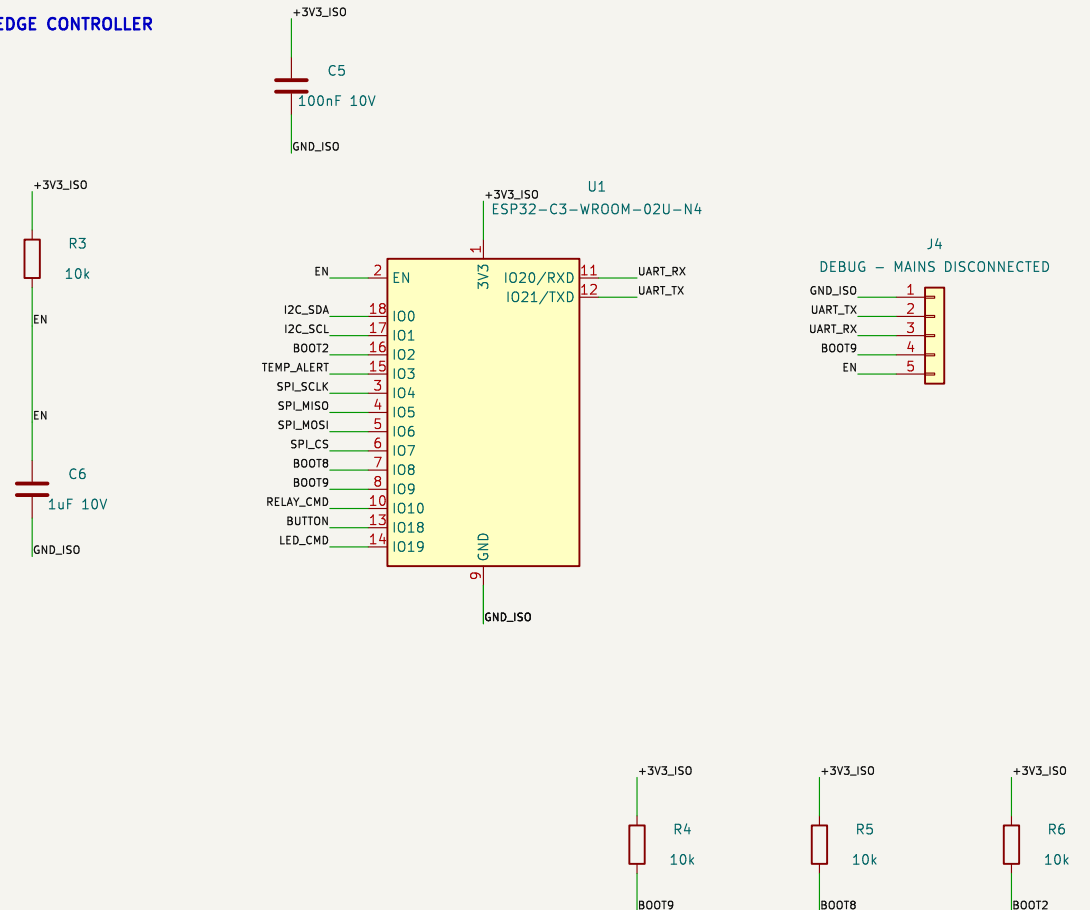

06 BOARD TEMPERATURE

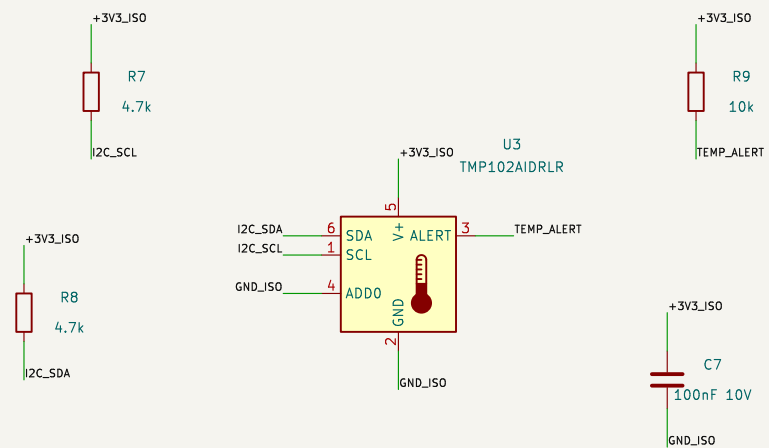

			HOLD
Sheet: / File: carbonmirror.kicad_sch			
Title: CarbonMirror – single socket controller			
Size: A3 KiCad E.D.A. 9.0.2	Date:	Rev: DEV–A / FAB Id: 1/1	