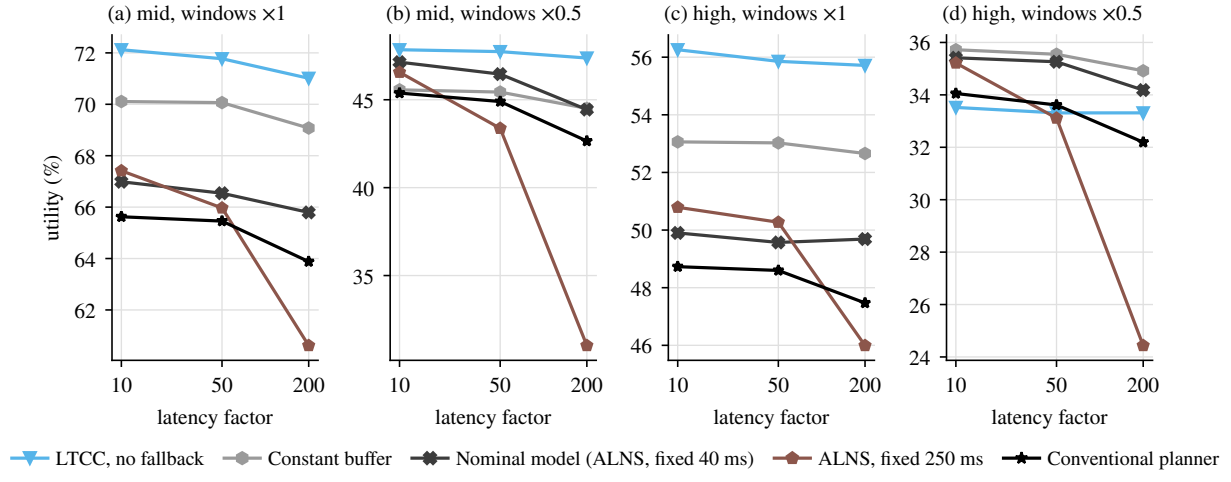
(a) mid, windows ×1
(b) mid, windows ×0.5
(c) high, windows ×1
(d) high, windows ×0.5
utility (%)
latency factor
LTCC, no fallback
Constant buffer
Nominal model (ALNS, fixed 40 ms)
ALNS, fixed 250 ms
Conventional planner