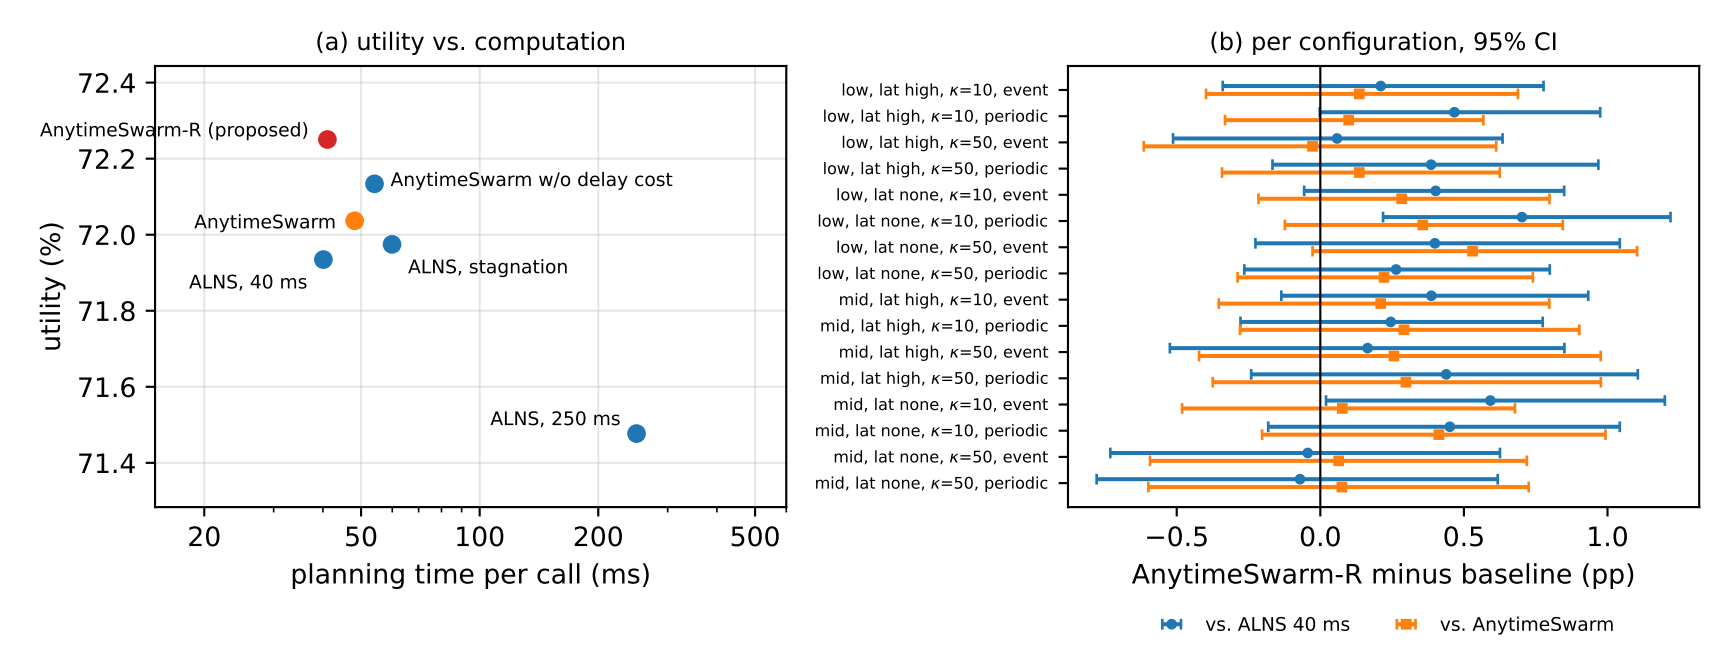
(a) utility vs. computation
utility (%)
72.4
72.2
72.0
71.8
71.6
71.4
AnytimeSwarm-R (proposed)
AnytimeSwarm w/o delay cost
AnytimeSwarm
ALNS, stagnation
ALNS, 40 ms
ALNS, 250 ms
20
50
100
200
500
planning time per call (ms)
(b) per configuration, 95% CI
low, lat high, κ=10, event
low, lat high, κ=10, periodic
low, lat high, κ=50, event
low, lat high, κ=50, periodic
low, lat none, κ=10, event
low, lat none, κ=10, periodic
low, lat none, κ=50, event
low, lat none, κ=50, periodic
mid, lat high, κ=10, event
mid, lat high, κ=10, periodic
mid, lat high, κ=50, event
mid, lat high, κ=50, periodic
mid, lat none, κ=10, event
mid, lat none, κ=10, periodic
mid, lat none, κ=50, event
mid, lat none, κ=50, periodic
−0.5
0.0
0.5
1.0
AnytimeSwarm-R minus baseline (pp)
vs. ALNS 40 ms
vs. AnytimeSwarm