

1

2

3

4

5

6

7

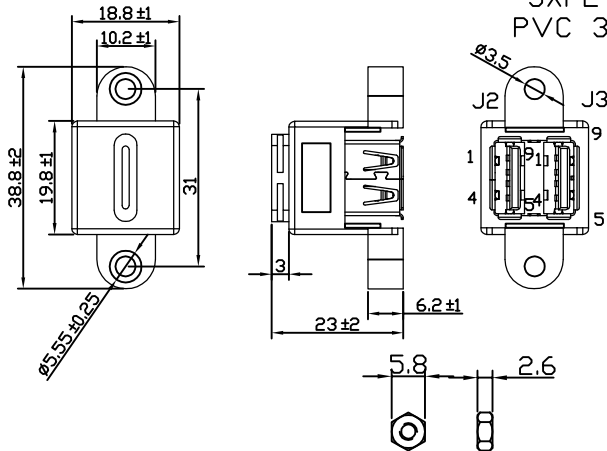
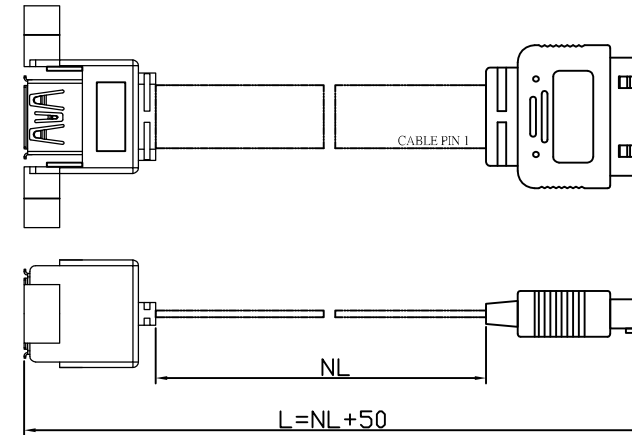
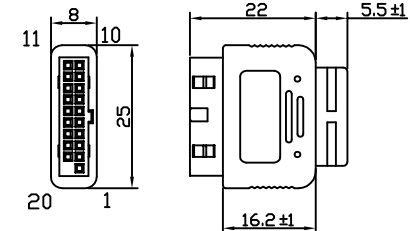
CN1

U3_A9F_DUAL

9 PIN*2

5XPL-227-G

PVC 35P 黑色外模

M3螺母 (5XSC-065)
後塞緊配CABLE: UL21283/UL21425/UL22112/EQUIVALENT
21P,30AWG, BLACK

CN2

U3_20F_INT
20 PIN, P2.0mm
5XPL-191-J2
PVC 60P 黑色外模

CN1				FC1 21P		CN2	
DUAL A9F DIP						U3 INT 20F	
PIN DEFINE	J2	J3				J1	PIN DEFINE
J3_VCC		1	-----	1	-----	19	V_bus2
J3_VCC			-----	2	-----		V_bus2
J3_D+		3	-----	3	-----	11	D_p2
J3_D-		2	-----	4	-----	12	D_n2
GND		4	-----	5	-----	13	GND
J3_SSTX+		9	-----	6	-----	14	SSTX_p2
J3_SSTX-		8	-----	7	-----	15	SSTX_n2
GND		7	-----	8	-----	16	GND
J3_SSRX+		6	-----	9	-----	17	SSRX_p2
J3_SSRX-		5	-----	10	-----	18	SSRX_n2
GND	SHELL		-----	11	-----		GND
J2_SSRX+	6		-----	12	-----	2	SSRX_n1
J2_SSRX-	5		-----	13	-----	3	SSRX_p1
GND	7		-----	14	-----	4	GND
J2_SSTX-	8		-----	15	-----	5	SSTX_n1
J2_SSTX+	9		-----	16	-----	6	SSTX_p1
GND	4		-----	17	-----	7	GND
J2_D-	2		-----	18	-----	8	D_n1
J2_D+	3		-----	19	-----	9	D_p1
J2_VCC			-----	20	-----		V_bus1
J2_VCC	1		-----	21	-----		V_bus1
						20	NC
ALL "GND" ARE CONNECTED TOGETHER.						10	ID/GND1

ALL "GND" ARE CONNECTED TOGETHER.
ALL "J3_VCC" ARE CONNECTED TOGETHER.
ALL "J2_VCC" ARE CONNECTED TOGETHER.
ALL "V_bus1" ARE CONNECTED TOGETHER.
ALL "V_bus2" ARE CONNECTED TOGETHER.

前轉換料號:

2

3

4


REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD
A0	B3	修正接點與說明	201231	Johanna	
A1	B2-B7	修正CN1 螺絲與CN2 外模外觀	210601	Johanna	
A2		修正接點	210713	Johanna	
A3		更新接點/ 圖框/191-J2	230818	GINA	

備註:

十字頭 M3螺絲鎖緊扭矩為6.5~10.5 單位Kgf-cm

Electrical Performance:

- Contact Resistance: 2Ω
- DC Insulation Resistance:
10MΩ/300V 0.01SEC.
- OPEN/SHORT TEST:
OPEN MAX.10Ω
SHORT MAX.2Ω

 高位企業有限公司 Yes Way Enterprise Corp.		TOLERANCE UNSPECIFIED	
 SCALE 1:1		UNIT mm	.000 ± .00 ± .0 ± ±
NAME U3 20F INT. to U3A9F Dual+Ear Cable		SHEET 1/1	DRAWN 12/31/2020 Johanna
DRAWING NO. 5G20A35-1xxxx		REV A4	DESIGNER Reo
			CHECKED Jenny
			APPROVED Tim

RoHS product

A3