


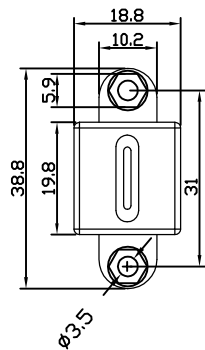



REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD
A0	B3	修正接點與說明	201231	Johanna	
A1		修正接點	210714	Johanna	
A2		修正接點	211206	Johanna	
A3		修正接點&CN2外觀	221206	Johanna	

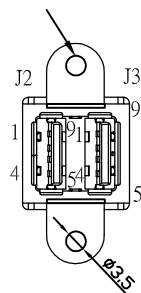


M3螺母(5XSC-065)
後塞緊配

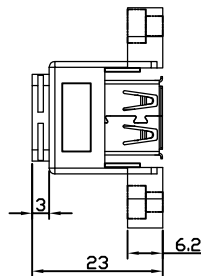

CN1
U3_A9F_DUAL
9 PIN*2
5XPL-227-G
PVC 35P 黑色外模

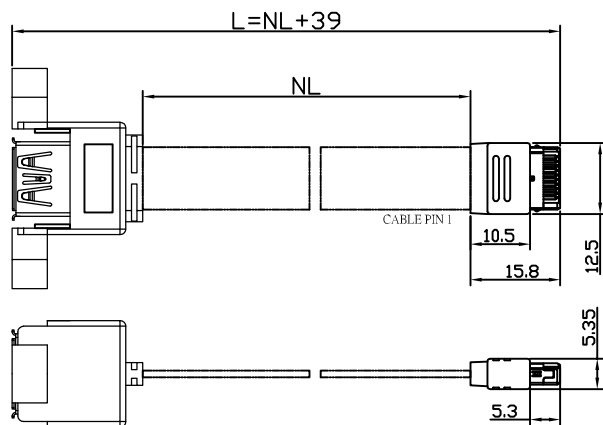

CABLE: UL21099/UL21283/UL21425
/UL22112/EQUIVALENT 21P
30AWG, BLACK



CN2
USB3.1C
INT KB20M
5XPL-229-K
白色膠芯(WHITE)

L(mm)	NL(mm)	P/N
	100±10	5G20A42-10139
	200±10	5G20A42-10239
	300±10	5G20A42-10339
	400±20	5G20A42-10439
500±20		5G20A42-10500
	500±20	5G20A42-10539
	600±20	5G20A42-10639

 高位企業有限公司 Yes Way Enterprise Corp.		TOLERANCE UNSPECIFIED	
 SCALE 1 : 1		UNIT mm	
NAME USB3.1C INT. KB20M to U3A9F Dual+Ear Cable		SHEET 1/1	DRAWN 1/14/2020 Johanna
DRAWING NO. 5G20A42-1xxxx		REV A4	CHECKED Jenny
			APPROVED Tim

CN1				FC1 21P	CN2	
DUAL A9F DIP					KB20M 5XPL-229-K	
	PIN DEFINE	J2	J3		J1	DEFINE
●	J2_VCC	1		1	20	V_bus2
●	J2_VCC			2		V_bus2
	J2_D+	3		3	18	D_p2
	J2_D-	2		4	19	D_n2
●	GND	4		5	14	GND
	J2_SSTX+	9		6	13	SSTX_p2
	J2_SSTX-	8		7	12	SSTX_n2
●	GND	7		8	17	GND
	J2_SSRX-	5		9	16	SSRX_p2
	J2_SSRX+	6		10	15	SSRX_n2
●	GND	SHELL		11	shell	GND
	J3_SSRX-		5	12	6	SSRX_n1
	J3_SSRX+		6	13	5	SSRX_p1
●	GND		7	14	4	GND
	J3_SSTX-		8	15	3	SSTX_n1
	J3_SSTX+		9	16	2	SSTX_p1
●	GND		4	17	1	GND
					7	GND
					11	GND
	J3_D-	2		18	9	D_n1
	J3_D+	3		19	8	D_p1
●	J3_VCC			20		V_bus1
●	J3_VCC	1		21	10	V_bus1

備註:
十字頭 M3螺絲鎖緊扭矩為
6.5~10.5 單位Kgf-cm

Electrical Performance:
1. Contact Resistance:2Ω
2. DC Insulation Resistance:
10MΩ/300V 0.01SEC.
3. OPEN/SHORT TEST:
OPEN MAX.10Ω
SHORT MAX.2Ω