

A

B

C

D

E

REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD
A0	C4	修改 接點標示	180417	Johanna	
A1	B1/B7	修改 備註	180521	Johanna	
A2	D4/E4	ADD PCB版號	180601	Johanna	
A3	D4/E4	更新 備註中電流適用長度	230912	Johanna	



A

B

C

D

E

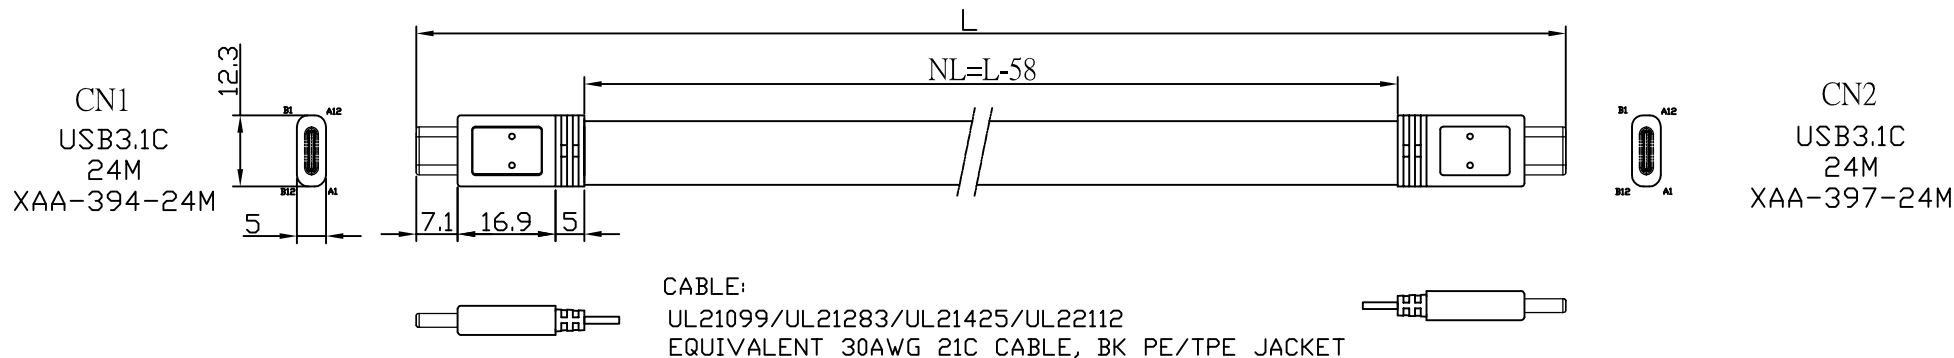

	PIN DEFINE	CN1		CABLE		CN2		PIN DEFINE
		J1A	J1B			J1A	J1B	
	GND	1		11		1		GND
	SSTX_p1	2		13		11		SSRX_p1
	SSTX_n1	3		12		10		SSRX_n1
	V_bus	4		1		4		V_bus
	cc	5		2		5		cc
	D_p1	6		19		6		D_p1
	D_n1	7		18		7		D_n1
	SBU1	8		4		8		SBU2
	V_bus	9		9		9		V_bus
	SSRX_n2	10		7		3		SSTX_n2
	SSRX_p2	11		6		2		SSTX_p2
	GND	12		17		12		GND
	GND	shell		5		shell		GND
	GND	1		8		1		GND
	SSTX_p2	2		9		11		SSRX_p2
	SSTX_n2	3		10		10		SSRX_n2
	V_bus	4		21		4		V_bus
	V_CONN	5		20		5		V_CONN
	NC	6				6		NC
	NC	7				7		NC
	SBU2	8		3		8		SBU1
	V_bus	9				9		V_bus
	SSRX_n1	10		15		3		SSTX_n1
	SSRX_p1	11		16		2		SSTX_p1
	GND	12		14		12		GND

*NOTE:


1)支援USB3.2與USB3.1C GEN.2 10G傳輸, 支援ALTERNATE模式,如PCIE,DP...等.
Support USB3.2 & USB3.1C Gen.2 10G, may apply to alternate mode,such as PCIE,DP...etc.
2)如搭配使用U3AM-U3.1C24F轉接線時, 部份機種可能僅支援單面GEN.2 10G傳輸.
While use with U3AM-U3.124F adapter cables, may only single side, support Gen.2 10G.

3)VCC Power support 60W Max.

$L \leq 0.5M$ / 5A
 $0.5M < L \leq 0.8M$ / 3A
 $0.8M < L \leq 1.0M$ / 2.3A
 $1.0M < L \leq 1.5M$ / 1.6A
 $1.5M < L \leq 1.6M$ / 1.5A
 $1.6M < L \leq 2.0M$ / 1.2A
 $2.0M < L \leq 2.75M$ / 0.9A
 $2.75M < L \leq 3.0M$ / 0.8A
 $3.0M < L \leq 4.0M$ / 0.6A
 $4.0M < L \leq 5.0M$ / 0.5A

L(mm)	NL(mm)	Part No.
100±10		*5G24A15-10100
250±10		5G24A15-10250
	200±10	5G24A15-10258
300±10		5G24A15-10300
500±20		5G24A15-10500
600±20		5G24A15-10600
800±20		5G24A15-10800
900±20		5G24A15-10900
1000±30		5G24A15-11000
1500±30		5G24A15-11500
1800±30		5G24A15-11800
2000±30		5G24A15-12000

*最短製作長度

 高位企業有限公司 Yes Way Enterprise Corp.		TOLERANCE UNSPECIFIED	
 SCALE 1:1		UNIT mm	
NAME USB3.1C 24M*2 CABLE		DRAWN 9/14/2017 Johanna	
DRAWING NO. 5G24A15-1xxxxx		DESIGNER Reo	
		CHECKED Jenny	
		APPROVED Tim	
RoHS product		A3	