The figure below summarises how the server fuses the local Gaussian fields.

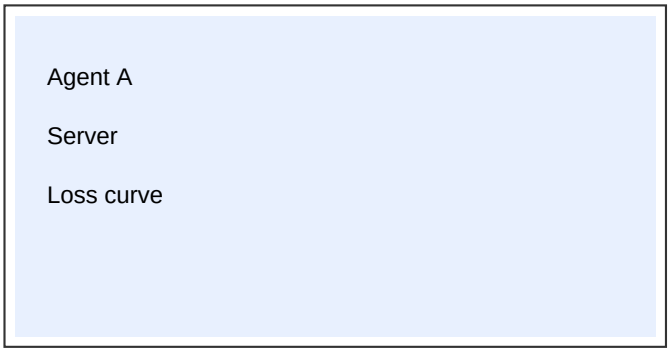


Fig. 1: Overview of the proposed collaborative pipeline.

Figure 1 illustrates the proposed architecture. Each agent maintains a local Gaussian field and exchanges only compact anchors with the server, which keeps the bandwidth bounded.

TABLE I: Comparison Between MaxImg and APO

Metric	MaxImg	APO (Ours)
Loss	0.0432	0.0377
PSNR	26.485	26.949
SSIM	0.9549	0.9613

The comparison above shows that the proposed allocation reduces the photometric loss while slightly improving the peak signal-to-noise ratio and the structural similarity index.