

1.5em 0pt

- 3) The proposed technique helps to monitor battery life at each stage of data transmission.
- 4) Our proposed methodology ensures reliable and efficient data transmission in a drone network, making it suitable for various UAV-based applications.

The rest of the paper is organized as follows: Section II provides a comprehensive study of existing methods of traffic control algorithms and their limitations. The methodology used for data collection and analysis and the implementation details of the density-based traffic control system using YOLO version 8 ML algorithm is discussed in Section III. We discuss the experimental results and their implications in Section VI. Finally, conclusions are given in Section VIII.

II. LITERATURE SURVEY

Wireless sensor networks (WSNs) face the problem of power-green records transmission due to the confined battery existence of the sensor nodes. One way to conquer this mission is to use relay nodes that can forward the aggregated records from the sensor nodes to a central base station (BS). However, the relay nodes might also have a limited transmission capability and sometimes they are unable to establish dependable links with the BS or another relay node [1]. Moreover, the relay nodes may additionally devour more strength than the sensor nodes, decreasing the network lifetime.

To address these issues, researchers have proposed to apply cellular device-to-device (D2D) communication technique as a relayed transmission mechanism for WSNs. D2D conversation allows the devices to talk at once with every other using mobile resources, without going through the BS. This can lessen the transmission distance, decorate the hyperlink fine, and improve the spectral performance [2]. Furthermore, D2D verbal exchange can offer dual connectivity that indicates that the devices can use both mobile and D2D links simultaneously, which could increase the reliability and robustness of communication [1].

The research under review describes a cellular D2D-assisted relay communication strategy for wireless sensor networks (WSNs), in which data is forwarded to the base station (BS) by the cluster heads (CHs) of sensor nodes via D2D relays [3]. The Maximum Weight Bipartite Matching method is used by the proposed strategy, DSPA (D2D Relay Node (DRN) Selection and uplink Power Allocation), to choose the best DRNs for each CH based on the channel gain and the residual energy of the DRNs [4]. Next, taking into account the interference from other pairings as well as the DRNs' energy usage, the strategy allows the uplink power for every CH-DRN pair. In comparison to alternative schemes, the authors demonstrate that their suggested method can increase the energy efficiency, hop gain, and network longevity of the WSNs [5].

Other related works on D2D relay verbal exchange for WSNs encompass [Social Reliable D2D Relay for Trustworthy Paradigm in 5G Wireless Networks], wherein the authors use social relationships amongst devices to shape private accept as true with and to select dependable relays; [Energy-Efficient

Power Allocation and Relay Selection Schemes for Relay-Assisted D2D Communications in 5G Networks], where the authors suggest schemes for power allocation and relay choice, based totally at the sign-to-noise ratio (SNR) and the energy harvesting functionality of the devices; and [Relay Selection-Based Energy Efficiency of Hybrid Device-To-Device Enabled 5G Networks], wherein the authors introduce a hybrid version of relay community that uses reactive and proactive relay choice strategies to enhance the energy efficiency of the network [6].

This review also summarises the main contributions of a few recent studies on power regulation and cooperative UAV channel modeling for 5G IoT networks. In a 5G IoT scenario where numerous UAVs work together with cellular base stations, various topological and communication related problems are addressed in such scenarios [7]. It focuses on uplink channel modeling and the investigation of uplink transmission performance. The effects of multi-UAV reflection and 3D distance on wireless signal propagation are considered in the channel model [8]. The three-dimensional distance is used to determine the path loss, which is a more realistic representation of the actual path loss. The UAV's uplink transmit power is modified using the power control factor to account for differences in propagation route losses in order to achieve precise power management [1].

One of the unsolved research problems is figuring out the optimal UAV grid topology with the shortest drone range for video monitoring over an unreachable area without cellular coverage. The study [4] acquired zero blind spots during surveillance by utilising the concept of the subject of view (FOV) of the onboard camera. Additionally, a wireless community for the UAV grid was established. Each UAV had a *Raspberry Pi* installed, and the inter-UAV distance was fixed primarily on the basis of excellent quality of service (QoS) and ideal packet loss for streaming videos. It verified that the video streaming QoS is lower than allowable thresholds at 4% packet loss and determined the prerequisites to prevent coverage location overlap between nearby UAVs.

The goal of the work presented in [10] on an energy-efficient UAV surveillance scheme that makes use of the compressive sensing (CS) concept is to minimize the overall energy consumption of the UAV network while meeting the surveillance quality requirement. This is achieved by formulating the UAV surveillance problem as a joint optimization problem of UAV trajectory design and CS measurement matrix design. Through simulations, it proved the efficacy of their plan and used the alternate direction method of multipliers (ADMM) algorithm to solve the optimization problem.

III. PROPOSED METHODOLOGY

After carefully examining many active projects and previously proposed frameworks (as mentioned in Section II) for efficient UAV network surveillance, we have created a system to improve the current methods used in this field. UAV network surveillance using effective load-aware multipath routing protocol is our proposed methodology.

A. Algorithm for effective UAV-based network surveillance

In this scenario, the objective is to optimize the communication between a set of drones within a specified area. The process begins by defining the coverage area of the drones and obtaining the latitude and longitude coordinates from a map. These coordinates are then translated into a coordinate system for further analysis. Next, the task involves strategically placing drones to eliminate blind spots, ensuring comprehensive coverage. The anchor drone is positioned at the centroid, facilitating effective communication with other drones in the network. To enhance communication reliability, the log distance path loss is calculated using the given formula. This computation involves factors such as transmitted power, transmitter, and receiver gains, wavelength, and the path loss exponent for free space.

Log distance path-loss:

$$\begin{aligned} PL_{LD}(d) &= PL_{LD}(d_0) + 10n\log(d/d_0) \\ PL_{LD}(d_0) &= 10\log[(P_t(G_t G_r^2)/(4d_0)^2)] + 10n\log(d) \end{aligned} \quad (1)$$

where,

P_t = Transmitted power = $10^{-0.4}W$

G_t = Transmitted gain = 10

G_r = Receiver gain = 10

$\lambda = c/f$

n = Path loss exponent for free space

Following this, the uplink path loss is determined, considering the time delay and path loss gain. Subsequently, the Signal-to-noise Ratio (SNR) is calculated, incorporating the transmitted power, path loss gain, and the power of additive white Gaussian noise at the receiver.

Uplink Path loss:

$$\zeta = \tau \cdot d^\alpha \quad (2)$$

where,

α = Path loss exponent

τ = Channel coefficient of wireless channel between the T_X and R_X

$$R_x = \sqrt{\beta(d)} \quad (3)$$

$\beta(d)$ = Large scale path loss

$$\begin{aligned} \beta(d) &= -PL_{LD}(d)[dB] \\ SNR &= P_t \cdot \zeta^{-1} \cdot g/N \end{aligned} \quad (4)$$

where,

g = Rayleigh fading,

ζ^{-1} = Path loss gain,

N = Power of AWGN at the receiver = $1.4332 \times 10^{-15}W$

The channel capacity, representing the maximum data rate that can be reliably transmitted, is then computed using the given bandwidth. This capacity is essential for determining the efficiency of data transmission within the network.

Channel capacity:

$$C = B \cdot \log(1+SNR) \quad (5)$$

where,

B = Bandwidth of the line = 360KHz

To optimize energy consumption, only a percentage of drones (e.g., 10%, 20%, or 30%) are activated at a time to transmit data to the anchor drone. This staggered activation helps in balancing the load and maximizing the lifespan of the drone batteries. Multiple possible communication paths are evaluated, and the most optimum path is selected based on the calculated parameters.

Along with the channel capacity, the battery life of each UAV is calculated after each transmission. For this calculation, the initial battery life of each UAV is assumed between 80% to 100%. The drone configuration to be undertaken for the project is 11.1V and 2200mAh battery power. The actual channel capacity including battery is determined as below:

$$\begin{aligned} C_{actual} &= C_{max} \cdot (Battery_{rem}/Battery_{max}) \\ Time_{trans} &= Data_{trans}/C_{rem} \\ Battery_{max} &= (11.1 \times 2200 \times 3.6)J \times Battery_{initial} \\ Battery_{rem} &= Battery_{prev} - 10^{-0.4} \times Time_{trans} \end{aligned} \quad (6)$$

Finally, according to the above calculations, the data is transmitted using the optimal path. Then battery life and channel capacity is updated accordingly after each transmission. This approach ensures efficient and reliable communication within the UAV network.

IV. ALGORITHM: FIND ROUTING PATH

Algorithm 1 Function For Finding All paths

```

1: function FIND_ALL_PATHS_TH(drone_graph, start, end,
   threshold, path)
2:   path.append(start)                                ▷ Add start to path
3:   if start == end then
4:     return path
5:   end if
6:   if start not in drone_graph then
7:     return []
8:   end if
9:   paths ← []
10:  for node in drone_graph[start] do
11:    if node not in path and len(path) < threshold
12:    then
13:      paths += find_all_paths_th(
14:        drone_graph, node, end, threshold, path.copy()
15:      )
16:    end if
17:  end for
18:  return paths

```

V. DRONE PATH ALGORITHM

Algorithm 2 Drone Path Algorithm

```

1: function DRONE_PATH(drone_no, trans_data, initial_battery_e
2:    $for\_one \leftarrow \text{sorted}(\text{find\_all\_paths}(\text{drone\_graph}, \text{drone\_no},$ 
3:    $cap \leftarrow \{\}$ 
4:   for  $i$  from 0 to  $\text{length}(for\_one) - 1$  do
5:      $row\_wise \leftarrow \{\}$ 
6:     for  $j$  from 0 to  $\text{length}(for\_one[i]) - 2$  do
7:        $row\_wise[for\_one[i][j]] \leftarrow$ 
8:        $\text{drone\_graph}[for\_one[i][j]][for\_one[i][j+1]]$ 
9:     end for
10:     $cap[i] \leftarrow row\_wise$ 
11:  end for
12:   $sorted\_min\_cap \leftarrow \text{sorted}(\text{map}(cap, \text{min}), \text{by value}, \text{reverse} = True)$ 
13:   $remaining\_battery\_energy \leftarrow$ 
14:   $\text{initial\_battery\_energy} - (10^{-0.4} \times$ 
15:   $(trans\_data/sorted\_min\_cap[0][1]))$ 
16:   $remaining\_battery \leftarrow$ 
17:   $remaining\_battery\_energy/\text{initial\_battery\_energy}$ 
18:   $battery\_energy \leftarrow \text{initial\_battery\_energy} \times$ 
19:   $remaining\_battery$ 
20:  for  $key$  in  $\text{keys}(cap[sorted\_min\_cap[0][0]])$  do
21:     $cap[sorted\_min\_cap[0][0]][key] \times$ 
22:     $remaining\_battery$ 
23:  end for
24:  for  $i$  from 0 to
25:     $\text{length}(for\_one[sorted\_min\_cap[0][0]]) - 2$  do
26:     $\text{drone\_graph}[for\_one[sorted\_min\_cap[0][0]][i]][for\_one[$ 
27:     $1]] \leftarrow cap[sorted\_min\_cap[0][0]][for\_one[sorted\_min\_cap[0][0][$ 
28:  end for
29:  return  $for\_one[sorted\_min\_cap[0][0]]$ 
30: end function

```

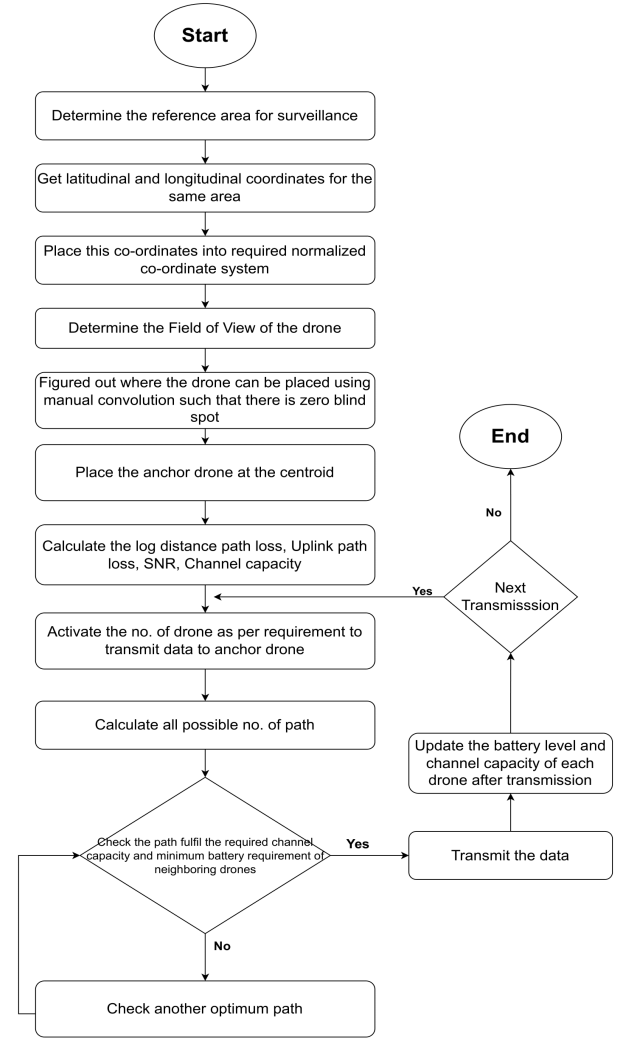


Fig. 2. Flow chart of UAV-based network surveillance

A. Implemetation and simulation of UAV network

Designing and implementing a surveillance system involves a methodical process, starting with identifying the surveillance area and obtaining geographic coordinates. Subsequently, determining the drone's field of view ensures optimal positioning to eliminate blind spots. Activation of the anchor drone initiates communication coordination among all drones. Calculating transmission parameters like log distance path loss and signal-to-noise ratio aids in selecting the best data transmission paths. Activating necessary drones and assessing path capacity and battery levels ensure optimal performance. Once an optimal path is confirmed, data transmission occurs, followed by updating drone metrics post-transmission. However, a comprehensive surveillance system design encompasses various considerations, including drone types, operational environments, and mission-specific requirements, demanding nuanced planning beyond this outlined process. The flow chart in Fig. 2 visually represents the real-time traffic management process.

The simulation of the UAV-based surveillance using load-aware multipath routing is implemented as follows:

1. Determining the shape of surveillance area from google map and plot it

To visualize a shape using Google longitude and latitude coordinates, the geographical points can be plotted on a map. They are transformed into a normalized coordinate system for a clear representation.

2. Image Processing

To perform image processing tasks, such as converting an image to grayscale, applying thresholding, and creating a binary matrix, a multi-step approach is employed. The first step involves the conversion of the input image into grayscale. Grayscale images represent each pixel with a single intensity value, eliminating color information. Applying a filter matrix involves convolving the matrix with the grayscale. The filter matrix serves as a template that moves across the image. The covered area refers to the spatial extent over which the filter is applied.

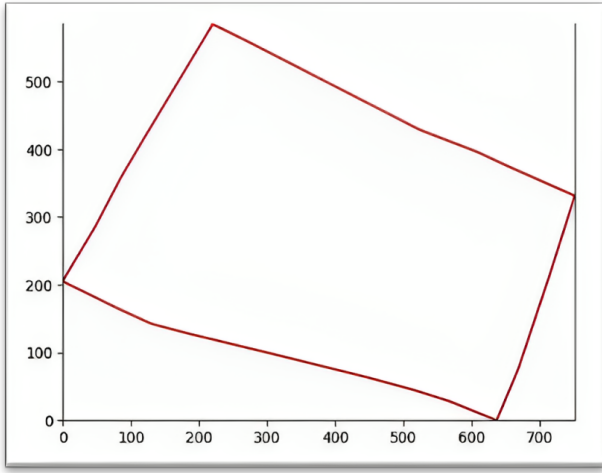


Fig. 3. Plotting reference area in required dimension

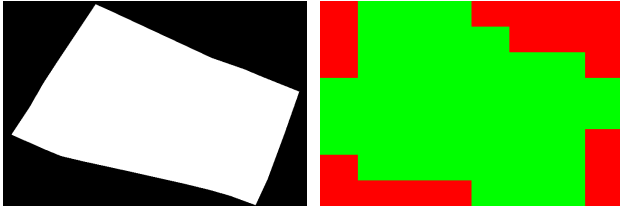


Fig. 4. Determining the coverage area of drone

3. Drone Deployment

Next, determined the centroid of entire UAV's system. This is achieved by calculating the centroid coordinates for each drone based on its spatial distribution within the shape. Once the drone centroids are identified, distances between them are computed, forming a distance matrix.

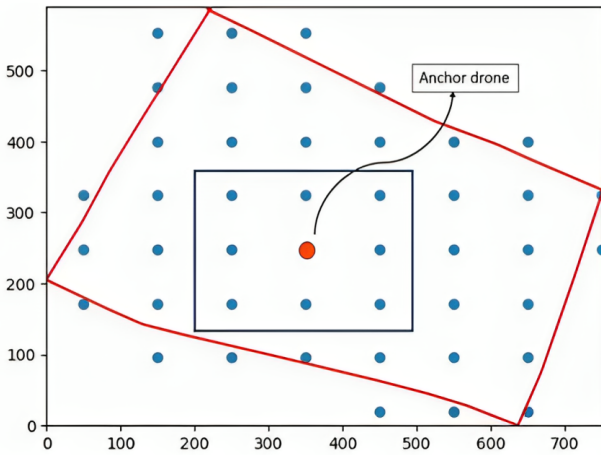


Fig. 5. Determining the position of drone to be placed and anchor drone position

4. Path Planning

To optimize communication in a drone network, the first step involves computing pathloss and signal-to-noise ratios (SNR) for each drone pair. Pathloss quantifies the attenuation

of the signal as it travels through the environment, while SNR provides a measure of the signal quality relative to background noise. Using these metrics, a drone graph is constructed, wherein nodes represent drones and edges signify communication links. The SNR values on the edges determine the strength of potential connections.

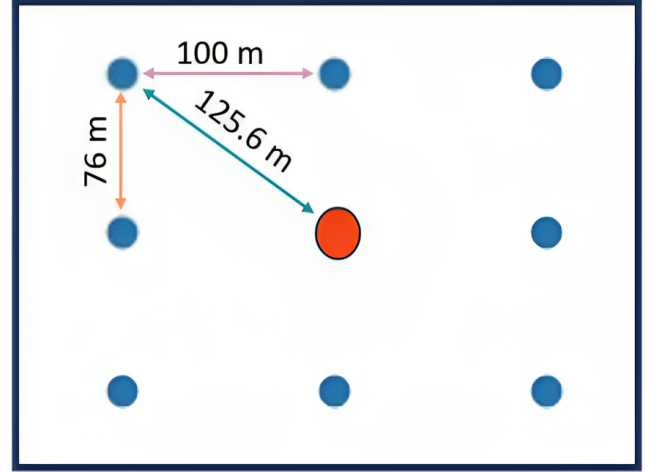


Fig. 6. Calculating distance between adjacent nodes

VI. SIMULATION RESULTS

The outcomes showed that ELAMR changed into capable of correctly balance the network load via distributing the records transmission responsibilities many of the drones based on their channel capacity and battery degree. This ended in a significant discount in quit-to-quit put off and an improvement in the packet transport ratio, thereby enhancing the general performance and satisfactory of the surveillance provider. Furthermore, the multipath construction algorithm hired via ELAMR changed into successful in figuring out the most excellent paths for data transmission. By selecting paths with minimum load and maximum hyperlink quality, the algorithm ensured that the surveillance facts become transmitted in the most green way possible.

As per the image shown above, when 10% of the UAV are activated, 4 UAV gets activated. The 4 UAV activated are UAV no. 4, 12, 29 and 40. The possible combination of these UAV are determined using the above-mentioned methodology. The path determination is done with the help of channel capacity of each data transmission link.

We want to transmit the 600MB data to the path 4-8-15-23-24 and the initial capacity of the path was 3.5-3.5-3.4-3.5 Mbps respectively and initial battery level was 100% of each drone. So, to transmit 600 MB data it takes 172-172-176-172 seconds. After completion of this transmission drone battery level goes to 31%-31%-32%-31%. Now, the current channel capacity is 1.085-1.085-1.088-1.085 Mbps. The same methodology is followed for other drone.

The mentioned above depicts the factors undertaken and observed during transmission of the surveillance data. The

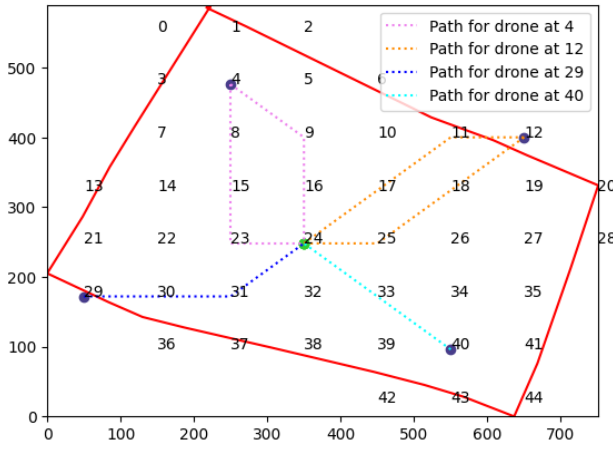


Fig. 7. Optimal path for the activated UAVs

Data To be Transmitted (MB)	Path	Previous capacity (Mbps)	Transmission Time (s)	Initial Battery Level	Remaining Battery level (%)	Current Capacity
600	4->8->15->23->24	3.5->3.5->3.4->3.5	172->172->176->172	100->100->100->100	31->31->32->31	1.085->1.085->1.088->1.085
600	12->18->25->24	3.4->3.4->3.3	176->176->180	100->100->100	32->32->34	1.088->1.088->1.122
330	29->30->31->24	3.5->3.5->3.3	172->172->180	100->100->100	31->31->34	1.085->1.085->1.122
300	40->33->24	3.4->3.4	176->176	100->100->100	32->32	1.088->1.088

Fig. 8. Observation result before and after transmission

factors to observed are size of the data transmitted, Path through which it gets transmitted, Channel capacity and battery life before data transmission, transmission time taken, channel capacity and remaining battery life after transmission. These factors help to improve the network functionality and manage the network. The factors can be calculated with the help of above-mentioned methodology. These factors also assist when the network will be drained and how much time is required of each size of transmission data.

VII. CONCLUSION

The approach of strategically placing drones to cover the given area with zero blind spots ensures efficient data transmission. The use of an anchor drone at the centroid helps in optimizing the network. Log Distance Path Loss and Uplink Path Loss calculations provide insights into the signal propagation characteristics. Signal-to-Noise Ratio and channel capacity calculations help in assessing the quality of communication. Activating drones in segments optimizes resource usage. Considering and choosing the most optimum path for data transmission enhances overall system efficiency. It helps to monitor battery life at each stage of data transmission. This methodology ensures reliable and efficient data transmission in a drone network, making it suitable for various applications.

VIII. FUTURE SCOPE

In the realm of drone technology, the integration of machine learning stands as a pivotal advancement, enabling continuous

analysis of historical data, weather conditions, and user patterns to optimize drone paths. This dynamic approach extends further with the development of mechanisms for real-time re-configuration of the drone network, responding to live data on traffic patterns and communication demands to ensure efficient resource utilization. Embracing the cutting edge, exploration of integration with 5G technologies enhances communication speed, reliability, and overall network performance. Scaling the system for large coverage areas becomes a priority, involving the deployment of multiple anchor drones and the implementation of optimized communication strategies. To adapt to varying communication needs, the system incorporates adaptive bandwidth allocation mechanisms, dynamically allocating resources for optimal performance under diverse conditions. The integration of edge computing capabilities on drones emerges as a strategic move, processing data locally to reduce latency and minimize reliance on centralized processing. Augmenting safety measures, advanced algorithms for autonomous navigation and collision avoidance empower drones to dynamically adapt to changes in the environment, ensuring a robust and secure system. This comprehensive approach not only leverages historical data and adapts to real-time demands but also embraces emerging technologies, scalability, and autonomy to create a resilient and efficient drone network.

REFERENCES

- [1] H. Min, J. Lee, S. Park and D. Hong, "Capacity Enhancement Using an Interference Limited Area for Device-to-Device Uplink Underlying Cellular Networks," *IEEE Transactions on Wireless Communications*, vol. 10, no. 12, pp. 3995-4000, December 2011.
- [2] D. Feng, L. Lu, Y. Yuan-Wu, G. Y. Li, G. Feng and S. Li, "Device-to-Device Communications Underlying Cellular Networks," *IEEE Transactions on Communications*, vol. 61, no. 8, pp. 3541-3551, August 2013.
- [3] J. Zhao, K. K. Chai, Y. Chen, J. Schormans and J. Alonso-Zarate, "Two-level game for relay-based throughput enhancement via D2D communications in LTE networks," *2016 IEEE International Conference on Communications (ICC)*, Kuala Lumpur, 2016, pp.1-6.
- [4] C. Singhal, Swades De, and Hari Mohan Gupta, "User Heterogeneity and Priority Adaptive Multimedia Broadcast over Wireless," *in 2014 IEEE International Conference on Communications (ICC)*, Sydney, NSW, 2014, pp. 1699-1704.
- [5] Fu, X., Ding, T., Peng, R. et al. "Joint UAV channel modeling and power control for 5G IoT networks." *J Wireless Com Network* 2021, 106 (2021). <https://doi.org/10.1186/s13638-021-01988-2>
- [6] A. C. Begen, T. Akgul, and M. Baugher, "Watching video over the Web, Part I: Streaming protocols," *IEEE Internet Computing*, vol. 15, no. 2, pp. 54-63, Mar. 2011.
- [7] N. Kumar, M. Ghosh and C. Singhal, "UAV Network for Surveillance of Inaccessible Regions with Zero Blind Spots," *IEEE INFOCOM 2020 - IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS)*, Toronto, ON, Canada, 2020, pp. 1213-1218, doi:10.1109/INFOCOMWKSHPS50562.2020.9162686
- [8] Pradip Kumar Barik, Chetna Singhal, Raja Datta, "An efficient data transmission scheme through 5G D2D-enabled relays in wireless sensor networks", *Computer Communications*, Volume 168, 2021, Pages 102-113, ISSN 0140-3664
- [9] R. Kwan, C. Leung and J. Zhang, "Resource Allocation in an LTE Cellular Communication System," *2009 IEEE International Conference on Communications*, Dresden, 2009, pp. 1-5.
- [10] S. Xiao, X. Zhou, D. Feng, Y. Yuan-Wu, G. Y. Li and W. Guo, "Energy-Efficient Mobile Association in Heterogeneous Networks With Device-to-Device Communications," *IEEE Transactions on Wireless Communications*, vol. 15, no. 8, pp. 5260-5271, Aug.