DepthWizard: Building, Tree and Ground Heights from One Satellite Image, with a Mamba-Based Height Model, for Disaster Response in India

HS202: Human Geography · Project Report

Himanshu Patel	2024AIB1007
Shlok Vaidya	2024AIB1016
Agampreet Singh	2024CSB1097
Saaransh Garg	2024AIB1015
Takshita Nagrale	2024AIB1018
Saloni Mahajan	2024CSB1149
Peruru Smitha Reddy	2024CSB1141
Kshita	2024CSB1098
Aryan Goyal	2024CSB1102
Arahana Garg	2024MCB1261

Indian Institute of Technology Ropar, Punjab, India · *5 November 2026*

Abstract

When a flood or landslide strikes, rescue teams need to know how tall buildings are, how high the ground lies and where water will reach, yet most of India has no up-to-date 3D map. DepthWizard estimates the height of every building, tree and patch of ground from one ordinary satellite photograph, ties those heights to sea level, and states how accurate they are. Our main novelty is a height model built on *Mamba*, a recent kind of neural network that reads an image in one efficient sweep instead of comparing every part with every other part: we join NVIDIA's MambaVision encoder to the output heads of the published RS3DAda model and train it to reproduce RS3DAda by knowledge distillation. The resulting model is nine times smaller (40.7 M against 366.5 M parameters), needs nine times less graphics memory and runs 5.2 times faster; after its first training run it is not yet as accurate (7.20 m against 3.90 m average error on aerial lidar tiles), so the deployed app still uses RS3DAda, which also beats Depth Anything V2 on the same 750 test tiles. Around the height model we contribute a terrain correction that removes rooftops and trees from the free global terrain map and levels it to NASA's ICESat-2 lasers, tree-height correction from a global canopy map or GEDI lasers, a measured error range for every building, and eighteen disaster tools reachable from one search box. In zero-shot tests with the published RS3DAda model, the average height error is 3.90 m on 150 aerial lidar tiles (a flat-ground guess: 5.65 m), 3.57 m on 1,450 buildings (10.54 m), and 4.85 m at eight Indian sites measured by NASA lasers (8.25 m). Removing rooftops halves the ground-level error in Indian towns (5.28 m to 2.36 m), and laser levelling raises flood-map agreement on the 2024 Porto Alegre flood from 0.30 to 0.79. On the 2023 Teesta outburst flood in Sikkim, free Sentinel-2 images map 1.28 km^2 of damaged valley floor, and a flood scenario on DepthWizard's 3D model of the valley matches it with a critical success index of 0.49. Objects taller than 20 m remain 15–18 m too low.


Keywords: height from a single image; Mamba; MambaVision; knowledge distillation; ICESat-2; GEDI; flood mapping; uncertainty; disaster management; India.

1. Introduction *the problem and what is new*

A satellite photograph shows what is on the ground, but not how tall it is. In a disaster, height is what matters: whether water will enter a house, which roofs can serve as refuges, which slopes may

slide and how much debris must be cleared. Laser surveys from aircraft give accurate heights but are expensive and rarely available in India. Pairs of satellite images taken from two angles can also give height, but such a pair seldom exists for the place and date of an emergency. Free worldwide terrain maps record one value every 30 m, too coarse to see a building, and in towns they mistake rooftops for the ground.

Our goal is to turn one optical image into a height map, tie it to sea level, let users fly through it in 3D and check it against reference data, and make the tool work offline across cities, villages, hills and forests. DepthWizard is our answer (Figure 1).

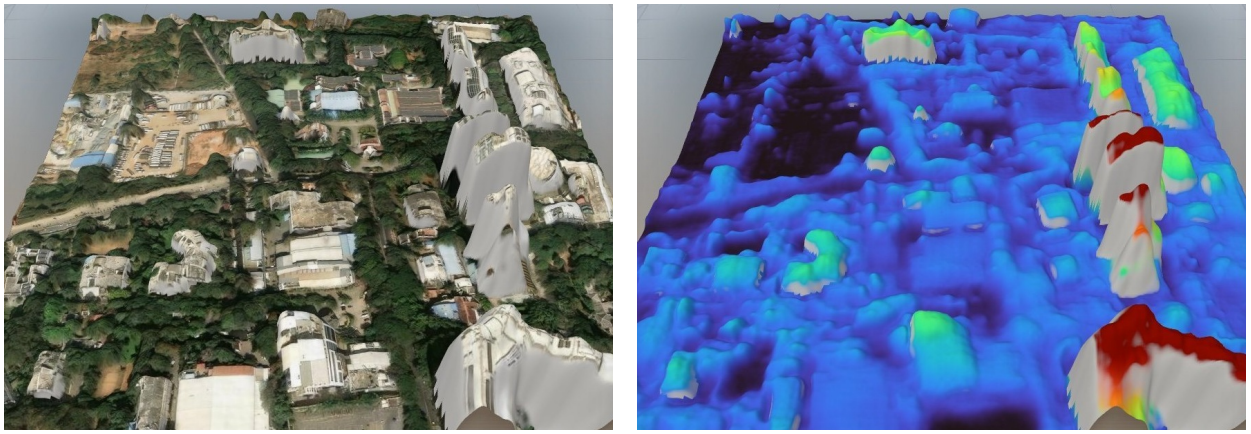

(a) 3D model draped with the photograph (b) Coloured by height above ground

Figure 1: Bengaluru Electronic City in 3D, built by DepthWizard from one satellite photograph. In (b), colour runs from 0 m (dark blue) to 48 m (red) above the ground. Heights are drawn at twice their true scale. Imagery: Esri World Imagery, for demonstration only.

Contributions. In order of importance:

1. **A Mamba-based height model (Section 2).** We built a height model on Mamba [1], using NVIDIA's MambaVision [2] as the image encoder and the two output heads of RS3DAda [3], one for height and one for land cover. Mamba reads an image in one sweep, so its cost grows in step with image area rather than with its square. We train it to reproduce RS3DAda by knowledge distillation [5], with an optional term that learns from true heights, and it is a drop-in replacement in the rest of the system. On 750 test tiles it is 5.2 times faster and nine times smaller than RS3DAda, but not yet as accurate (Section 8.2).
2. **Heights tied to sea level and checked by satellite lasers (Section 5.2).** We remove rooftops and trees from the free terrain map using the model's own output, level it to NASA ICESat-2 laser points, and add two safety rules learned from real failures.
3. **Honest error ranges (Section 5.4).** Every building receives a range, for example 12 m$\pm$6 m, whose reliability we measured on cities the method never saw.
4. **Tools for disaster teams (Section 6) and a real Indian test (Section 8.6).** Eighteen tools, all found from one search box, turn heights into flood, evacuation, landslide and damage maps; we apply the system to the 2023 Teesta flood.

Section 3 reviews related work, Section 4 states the objectives, Section 5 describes the method, Section 6 the application, Section 7 the test data, Section 8 the results, and Section 9 discusses limitations and next steps. Table 1 explains the technical terms used throughout.

Table 1: Terms used in this paper, in plain words.

Term	Meaning
Height map (DSM)	A map giving the height of every point, including roofs and tree tops, in metres.
Terrain map (DTM)	The height of the bare ground, with buildings and trees removed.
Height above ground	How tall an object stands above the ground beneath it.
Lidar	Laser scanning from an aircraft or satellite; the most accurate height reference.
ICESat-2, GEDI	NASA satellites that measure heights with lasers along narrow tracks.
Transformer	A neural network that compares every part of an image with every other part.
Mamba	A newer neural network that reads an image in one sweep while keeping a running memory.
Distillation	Training a "student" model to reproduce the answers of a trained "teacher" model.
Zero-shot	Tested on places the model never saw in training, with no adjustment.
Error (MAE)	The average size of the mistake, in metres; lower is better.
Baseline	A simple guess, such as "everything is flat ground", that a useful method must beat.
CSI	Agreement between a predicted and a real flood map, from 0 (none) to 1 (perfect).

2. Our Novelty: a Mamba-Based Height Model *why, how, status*

2.1 Why Mamba

The published model we start from, RS3DAda [3], reads images with a Transformer, DINOv2 ViT-L [4]. A Transformer cuts the image into small patches and compares every patch with every other patch. This works well, but the work grows with the *square* of the number of patches: doubling the width and height of an area multiplies the comparisons by about sixteen. Satellite scenes are large, so the model must cut them into many small tiles and cannot see far beyond each tile.

Mamba [1] reads patches one after another while carrying a compact running memory of what it has seen, and chooses at each step what to keep and what to forget; its work grows only in step with the image size. MambaVision [2] adapts this idea to images: its early stages are convolutions that pick up edges and textures, and its later stages combine Mamba layers with a few Transformer layers, so it still relates distant parts of an image, such as a building and its shadow. Table 2 sets the two models side by side.

Table 2: The published RS3DAda model and our Mamba-based model.

	RS3DAda (published) [3]	DepthWizard-Mamba (ours)
Image encoder	DINOv2 ViT-L/14 Transformer [4]	MambaVision-T, Mamba and attention [2]
How it reads	Every patch against every patch	One sweep with a running memory
Cost as area grows	Grows with the square	Grows in step (Mamba layers)
Size	366.5 M parameters	40.7 M parameters
Speed (one GPU)	105 tiles per minute	546 tiles per minute
Graphics memory	705 MiB	78 MiB
Outputs	Height and 8 land-cover classes	The same two heads
Tile size	518 pixels	512 pixels
Training	Synthetic cities + adaptation	Distillation (Eq. 1) or the full recipe
Hardware	Any computer, including laptops	NVIDIA graphics card

2.2 Architecture

MambaVision produces image features at four scales: 1/4, 1/8, 1/16 and 1/32 of the input size. Because these already form a pyramid, each scale is passed through a single 1×1 projection straight into RS3DAda's dense-prediction heads (DPT [6]), which fuse the scales and return a full-resolution height map and land-cover map (Figure 2). The new model therefore gives exactly the same outputs as the old one, and every later step of DepthWizard runs unchanged.

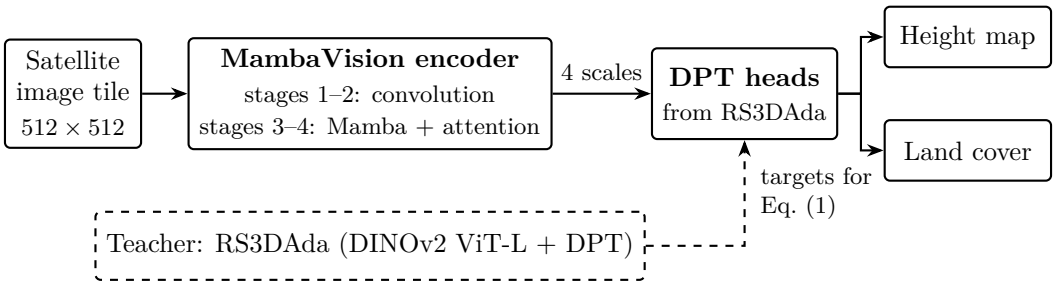


Figure 2: The Mamba-based height model. The encoder's four feature scales go directly into the same two output heads that RS3DAda uses; during training, RS3DAda's own answers serve as targets.

2.3 Training by distillation

Training a height model from scratch needs very large labelled datasets. Instead, the Mamba model (the student, S) looks at unlabelled satellite images and learns to give the same answers as RS3DAda (the teacher, T) [5]. With predicted heights $\hat{h}$, land-cover scores z and the softmax σ, its training objective is

$$\mathcal{L} \;=\; \ell_1^{\mathrm{s}}(\hat{h}_{\mathrm{S}}, \hat{h}_{\mathrm{T}}) \;+\; \lambda\,\tau^2\,\mathrm{KL}\big(\sigma(z_{\mathrm{T}}/\tau)\,\|\,\sigma(z_{\mathrm{S}}/\tau)\big) \;+\; \gamma\,\ell_1^{\mathrm{s}}(\hat{h}_{\mathrm{S}}, h_{\mathrm{label}}), \tag{1}$$

where ℓ_1^{s} is the smooth-L1 loss. In words: the first term penalises differences in height from the teacher; the second makes the student's land-cover answers match the teacher's, softened by a temperature τ so that the student also learns how sure the teacher was; and the optional third term uses true heights from the synthetic SynRS3D cities, which lets the student improve on the teacher instead of copying its faults. Table 3 lists the settings. The same model can also be trained with RS3DAda's full recipe of synthetic data plus adaptation to real images.

Table 3: Training settings for the Mamba model.

Setting	Value
Teacher	RS3DAda, released weights
Training images	SynRS3D tiles; 2% held out for validation
Crops and augmentation	512 px random crops, flips and 90° turns
Steps, batch size	20,000 steps, 8 images per step
Optimiser	AdamW, weight decay 10^{-4}
Learning rate	heads 10^{-4}, encoder 10^{-5}; 500-step warm-up, then cosine
Loss weights (Eq. 1)	$\lambda = 0.5$, $\tau = 2$; $\gamma = 0$, or $\gamma > 0$ with labels
Validation	height error against the teacher every 1,000 steps

2.4 First results

The first Mamba student was trained with the settings of Table 3 and tested on the same 750 tiles as RS3DAda (Section 8.2). It delivers the efficiency we designed it for: it has nine times fewer parameters, needs nine times less graphics memory and processes 546 tiles per minute against

RS3DAda's 105 on the same graphics card (Table 2). It is not yet as accurate. Its average error is 7.20 m on the aerial lidar tiles against 3.90 m for RS3DAda, worse than the flat-ground guess there (5.65 m), and 8.70 m and 3.39 m on the Atlanta and Buenos Aires satellite tiles against 5.91 m and 1.86 m for RS3DAda. Most of the gap is in finding *where* objects are: even after each tile's scale and offset are corrected, its correlation with the true heights is 0.29 against 0.61. The deployed app therefore keeps RS3DAda, and closing this gap with longer training and the true-height term of Eq. (1) is our first next step.

3. Related Work *what already exists*

Height from one image. Transformers with dense-prediction heads [6] estimate depth from a single photograph. RS3DAda [3] adapted this to satellite images by training on SynRS3D, a large set of computer-generated cities, then adjusting to real images without labels. General-purpose depth models such as Depth Anything V2 [22] are trained on ordinary photographs; we compare against them in Section 8.2. Mamba [1] and MambaVision [2] are recent alternatives to Transformers; to our knowledge, no ready-to-use satellite height model built on them has been released.

Terrain and lasers. Copernicus GLO-30 [7] is a free worldwide terrain map at 30 m; FABDEM [8] removes buildings and forest from it for non-commercial use. NASA's ICESat-2 [9, 10] and GEDI [11] measure ground and tree-top heights with lasers along narrow tracks, and Meta's canopy map [12] gives tree heights worldwide at 1 m. Song *et al.* [23] recently showed that sparse ICESat-2 points can correct single-image height maps, which supports the levelling step we use for terrain.

Disaster modelling. A simplified shallow-water model [13] predicts how floods spread; radar images split into water and land by Otsu's method [14] show where floods really were; and the Indian Standard IS 14496 [15] classifies slopes by landslide risk. Table 4 compares the main ways of obtaining heights.

Table 4: Ways of obtaining heights for disaster response.

Approach	Needs	Detail	Sea level	Error stated
Aircraft lidar survey	A survey flight	Very fine	Yes	Yes
Stereo satellite pair	Two matched images	Fine	Yes	Partly
GLO-30, FABDEM [7, 8]	Nothing (free)	30 m	Yes	No
RS3DAda [3]	One image	Pixel	No	No
DepthWizard (ours)	One image + free data	Pixel	Yes	Yes, measured

4. Objectives *what success means*

Each objective in Table 5 had its test fixed before the work began.

Table 5: Objectives and how each is measured.

#	Objective	How success is measured
O1	A height for every pixel of one image	Smaller error than a flat-ground guess on unseen data
O2	Heights in metres above sea level	Closer to laser-measured ground than the free terrain map
O3	Correction from a few surveyed points	Error reported each time, checked on a left-out point
O4	Checking inside the app	Error figures per scene and per type of land
O5	An honest error range on each building	Range holds 90% of the time on unseen cities
O6	Disaster tools that are easy to find	Every tool opens from one search box
O7	Works offline on an ordinary laptop	Measured time for one full scene
O8	A more efficient height model (Mamba)	Faster and smaller than RS3DAda on the same tests; accuracy compared

5. Method

from photograph to checked 3D map

5.1 Pipeline

A scene goes through seven steps (Figure 3). An ordinary PNG or JPEG photograph gives heights above the ground; a GeoTIFF, which carries its location, continues to heights above sea level.




Figure 3: From one photograph to a checked 3D map. Tiles overlap by half, and each is read four times (original and flipped) to smooth the result.

5.2 From height above ground to height above sea level

The model gives the height h of each point x above the ground beneath it. Adding the height of the ground itself gives the height above sea level:

$$\mathrm{DSM}(x) \;=\; \mathrm{DTM}(x) \;+\; h(x). \tag{2}$$

The ground map starts as GLO-30 [7], which in towns sits on rooftops. In each 30 m square we therefore subtract the average building and tree height the model found, and where a square is mostly roofs or trees we fill it from its neighbours. We then shift the whole map up or down to match ICESat-2 laser points that reached the ground [10]. Two safety rules came from observed failures: we refuse to shift when only one laser track crosses the scene, and we discard "ground" laser points that sit on a roof. If the user has surveyed K points of known elevation z_k at positions (x_k, y_k), the map value $\hat{z}_k$ there is corrected with the best-fitting level, scale and tilt:

$$\min_{a,b,c,d} \sum_{k=1}^{K} \left(z_k - a - b\,\hat{z}_k - c\,x_k - d\,y_k\right)^2. \tag{3}$$

One point sets only the level a; two or three also set the scale b; four or more also set the tilt c, d. A leave-one-out error is reported with every fit.

5.3 Correcting tree heights

The model sees trees at only 18–60% of their true height. Trees can therefore take their height from Meta's canopy map [12], or be scaled up by a factor learned from the GEDI laser shots [11]

that fall on trees,

$$s_{\text{tree}} \;=\; \underset{k}{\text{median}}\; \frac{H_k^{\text{GEDI}}}{\hat{h}_k}, \tag{4}$$

that is, the typical ratio between the laser's tree height H_k and the model's $\hat{h}_k$ at the same spots.

5.4 An error range for every building

Each tile is read four times; how much the four answers disagree, u, hints at how unsure the model is. Split conformal prediction [16] turns this hint into a range that holds a stated share of the time. On n buildings with known heights we compute the errors e_i and set

$$r_i = \frac{|e_i|}{u_i + u_0}, \qquad \hat{q} = r_{(\lceil (n+1)(1-\alpha) \rceil)}, \qquad C(x) = \big[\, \hat{h}(x) \pm \hat{q}\,(u(x) + u_0) \big], \tag{5}$$

where $r_{(k)}$ is the k-th smallest score, so that the range $C(x)$ should contain the true height 90% of the time ($\alpha = 0.1$, $u_0 = 0.25\,\text{m}$). We then test that promise on cities that were not used to set it.

5.5 Disaster models

For a simple flood, every place below a chosen water level that is connected to the river or the scene edge is marked wet. For water that flows over time we use the model of Bates *et al.* [13], which moves water between neighbouring cells according to the slope of the water surface η, the flow depth h_f and the ground roughness n:

$$q_{t+\Delta t} \;=\; \frac{q_t - g\, h_f\, \Delta t\, \partial \eta / \partial x}{1 + g\, \Delta t\, n^2\, |q_t| \,/\, h_f^{7/3}}, \tag{6}$$

where q is the discharge per unit width and g the gravitational acceleration. We added limits so that no cell gives away more water than it holds. To compare a flood prediction with reality we use a real flood map, from a mask or from a radar image split into water and land [14], and the critical success index

$$\text{CSI} \;=\; \frac{TP}{TP + FP + FN}, \tag{7}$$


where TP counts cells both maps call wet, and FP and FN the cells only one of them calls wet. Evacuation routes are the cheapest paths [17] that avoid steep slopes, deep water and buildings; landslide risk follows IS 14496 [15]. All outputs are labelled as scenarios, not forecasts.

6. The Application *pages and tools*

DepthWizard runs on an ordinary laptop. A Python server runs the height model, terrain and laser steps and stores heavy data per scene, so a scene opened once works without internet; the browser interface uses three.js [18] for the 3D view. The site has a home page, a scene library and six working pages that follow the disaster cycle: explore the heights, check them, prepare before a disaster, respond during it, plan relief and assess the damage (Figure 4). Every tool is a panel that switches on in place and can also be found by typing its name in a search box (*Ctrl K*). Results export as GeoTIFF, 3D model (GLB), GeoJSON and CityJSON files that open in QGIS, ArcGIS or Bhuvan. Table 6 lists the tools, and Figure 5 shows several of them running on real scenes.



(a) Home

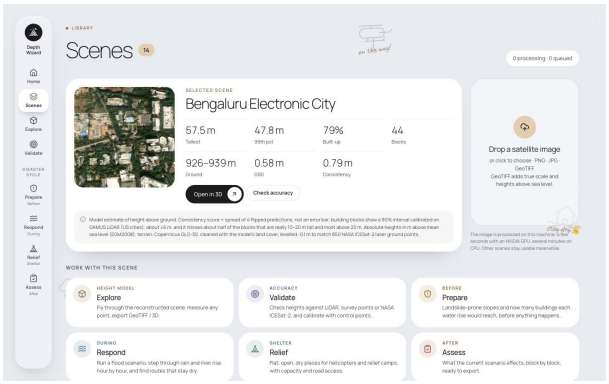


(b) Scenes: library and upload




(c) Explore: 3D heights and fly-through




(d) Validate: check against references

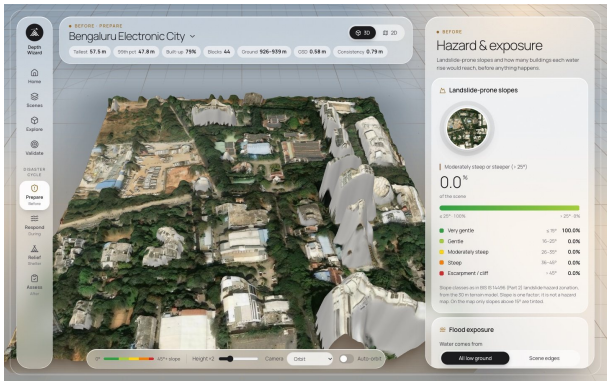


(e) Prepare: risky slopes and water rise

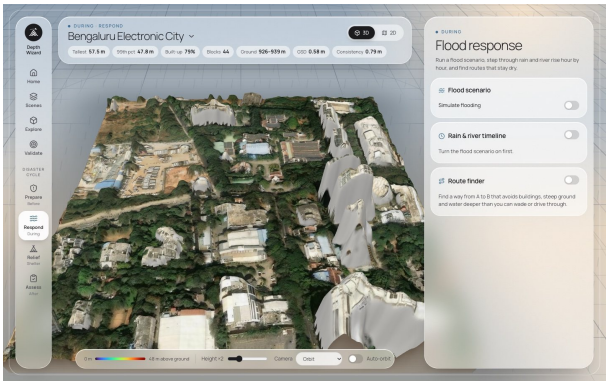

(f) Respond: flood scenario and routes

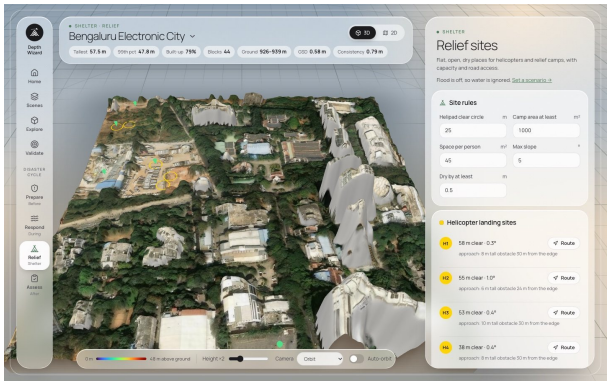


(g) Relief: helipad and camp sites

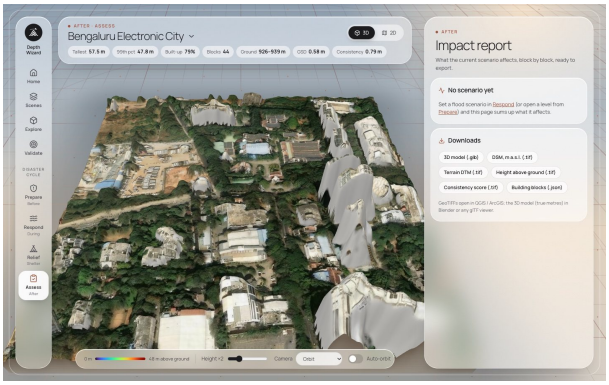


(h) Assess: impact report


Figure 4: The application on a real scene, Bengaluru Electronic City, built from one satellite image.

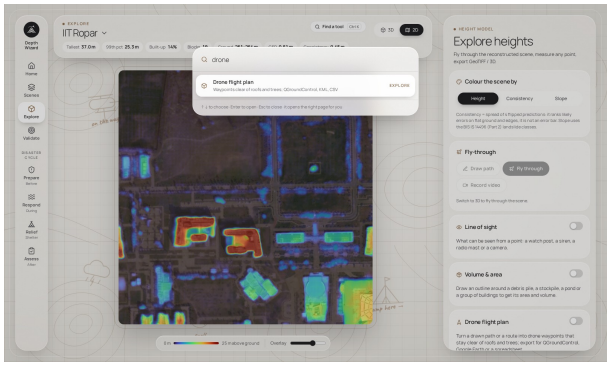


(a) Tool finder: typing “drone”

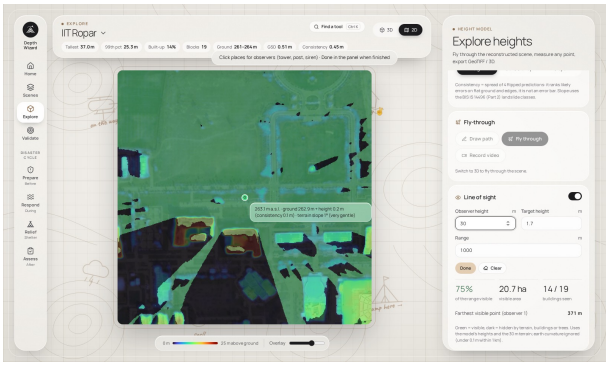


(b) Line of sight from a 30 m mast

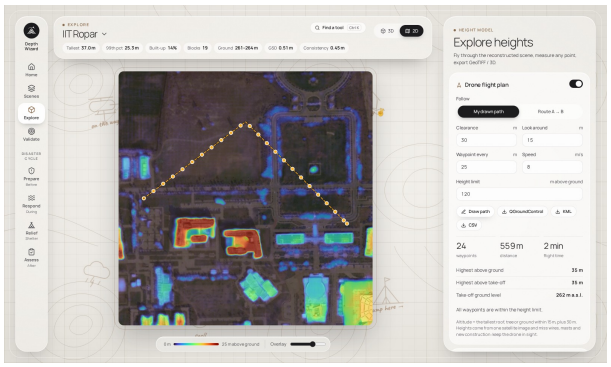


(c) Drone flight plan clear of every roof

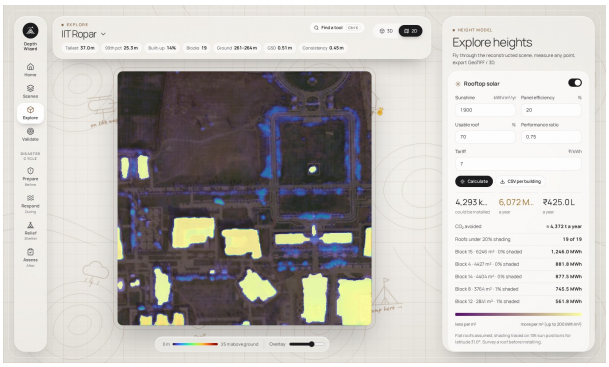

(d) Rooftop solar yield with shading

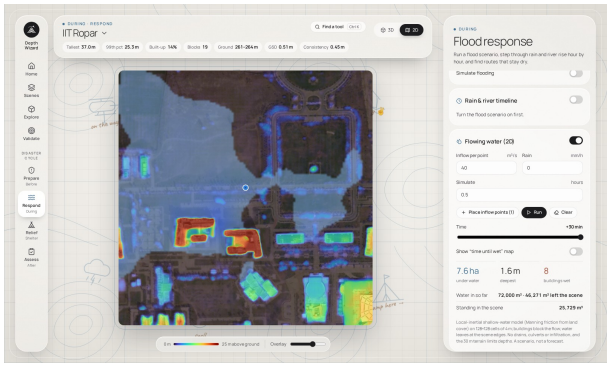


(e) Flowing water from an inflow point

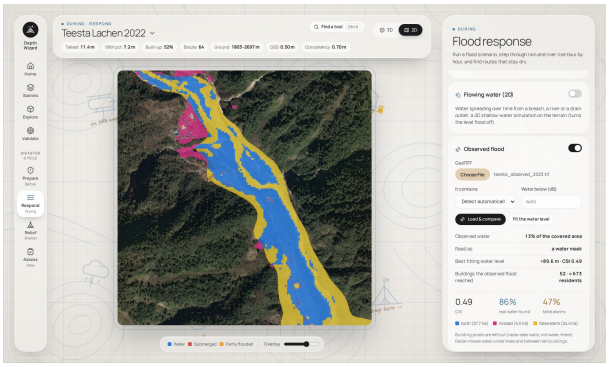

(f) Observed flood vs scenario, Teesta 2023



(g) Situation report

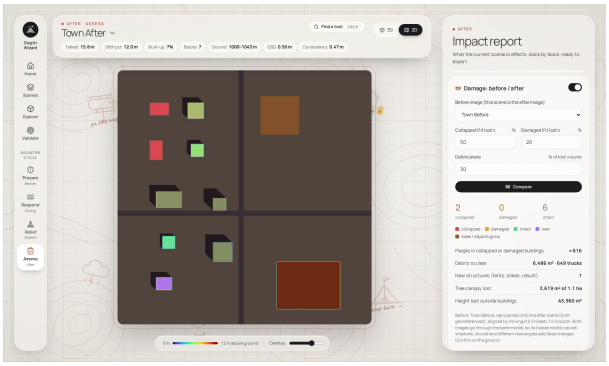

(h) Damage before/after (built-in test scene)

Figure 5: Tools running in the application. Panels (a)–(e) and (g): the IIT Ropar campus; (f): the Teesta valley with the 2023 damage map (Section 8.6); (h): a built-in test scene with known collapsed buildings, because no real before/after pair has been processed yet.

Table 6: The eighteen tools and the question each answers.

Tool	Question it answers
Explore	
Line of sight	What can be seen from this mast, tower or camera?
Volume and area	How much debris is in this pile, or water in this pond?
Drone flight plan	Which route keeps a drone safely above every roof?
Rooftop solar	How much power could each roof produce, allowing for shade?
Map overlay	Where are the streets and names on top of the 3D view?
Mosaic	How do neighbouring scenes join into one larger area?
Validate and calibrate	
Heights from shadows	Do shadow lengths in the photograph confirm the heights?
Tree and tall-object fix	Can the weakest heights be corrected from other sources (Eq. 4)?
Error bars	How far could each height be off (Eq. 5)?
Terrain source	Can I use my own, better ground map?
GPS and field points	Can points measured on the ground correct the map (Eq. 3)?
Prepare, Respond, Relief, Assess	
Landslide risk	Which slopes may fail in heavy rain?
People at risk	How many people live in the affected buildings?
Observed flood	How well does the predicted flood match a real flood map (Eq. 7)?
Flowing water	Where does the water go, hour by hour (Eq. 6)?
Evacuation plan	Which camp should each family go to, and by which route?
Damage before/after	Which buildings collapsed and which are new?
Situation report	What does a decision maker need on one page?

7. Test Data and Protocol *how we measured*

All tests are zero-shot: the model never saw these places in training and nothing was tuned on them. Table 7 lists the test data.

Table 7: Test data.

Name	Images	Truth from	Size and use
GAMUS [19]	Aerial photos, 0.33 m	Aircraft lidar	150 tiles in three US cities; accuracy and error ranges
Geopose [20]	Satellite images	Lidar	300 tiles each, Atlanta and Buenos Aires; published results
India	Satellite, 0.31–0.5 m	ICESat-2 and GEDI	8 sites: two each of town, sparse land, hills and forest
Porto Alegre	Maxar, before the 2024 flood [21]	Mapped flood extent	4 windows of 320 × 320 m; flood test
Teesta	Maxar 2022; Sentinel-2 [24]	Before/after change	12 km of valley; case study

With our height $\hat{h}_i$ and the true height h_i at N points we report

$$\mathrm{MAE} = \frac{1}{N}\sum_{i=1}^{N}|\hat{h}_i - h_i|, \qquad \mathrm{bias} = \frac{1}{N}\sum_{i=1}^{N}(\hat{h}_i - h_i), \qquad \mathrm{RMSE} = \sqrt{\frac{1}{N}\sum_{i=1}^{N}(\hat{h}_i - h_i)^2}. \tag{8}$$

MAE is the average size of the error, bias says whether we are too high or too low on average, and

RMSE weighs large errors more. Every value is a mean over tiles or sites with a 95% confidence range from 2,000 bootstrap resamples, shown in brackets, and is compared with a baseline measured at the same points. At the Indian sites, laser tracks alternate between correcting the map and checking it, so no laser point is used for both. Every number in this paper is recorded, with the file that produced it, in the project's claims register.

8. Results *how accurate, and where*

Unless stated otherwise, results in this section are for the published RS3DAda model inside DepthWizard.

8.1 Height accuracy

Table 8: Average height error in metres (lower is better), against a simple baseline at the same points; 95% confidence ranges in brackets.

Test	Size	DepthWizard	Baseline
Aerial photos, against aircraft lidar			
Every point	150 tiles	3.90 [3.24, 4.66]	5.65 (flat)
Buildings	1,450	3.57 [3.08, 4.06]	10.54 (flat)
Town / forest / open land	137–148 tiles	2.90 / 6.67 / 0.96	5.66 / 8.70 / 0.55
Satellite images			
Atlanta	300 tiles	5.99 [5.57, 6.43]	5.67 (published)
Buenos Aires	300 tiles	1.94 [1.86, 2.03]	2.01 (published)
India, against NASA lasers			
Object heights, ICESat-2	8 sites	4.85 [3.04, 6.69]	8.25 (height 0)
Tree and roof heights, GEDI	7 sites	9.93 [4.86, 15.42]	16.89 (height 0)

For buildings, DepthWizard's heights are about three times closer to the truth than the flat-ground guess (Table 8); at Indian sites they are almost twice as close as guessing zero; and on satellite images they agree with the original authors' published results within our confidence ranges, so our software does not lose accuracy. Figure 6 breaks the error down by type of surface: the gain comes from buildings and trees, while on roads and bare ground, where the true height is close to zero, the flat guess is already right and slightly better. Figures 7 and 8 show what the heights look like.

8.2 Comparison of height models

We ran four models on the same 750 tiles (150 GAMUS, 300 Atlanta, 300 Buenos Aires), each cropped to the same centre and read four times with flips: RS3DAda, our Mamba student, and the relative and metric versions of Depth Anything V2 (Large) [22], a leading general-purpose depth model. Depth Anything gives relative depth, not heights in metres, so for a fair comparison every model is also scored after its output is fitted to the true heights with the best scale and offset for each tile ("aligned"); this shows how well a model finds *where* things are tall, independent of units. Because every tile is cut to the same centre, the RS3DAda values differ slightly from Table 8. Table 9 gives the results and Figure 9 shows typical tiles.

RS3DAda is the most accurate model on every test, with or without alignment; the differences from Depth Anything V2 are small but certain (relative version, aligned: +0.30, +0.70 and +0.39 m worse on the three sets, all 95% ranges above zero). The Mamba student is the cheapest model by far, but its first version is clearly less accurate: per tile it is 3.30 m [2.73, 3.92] worse than RS3DAda

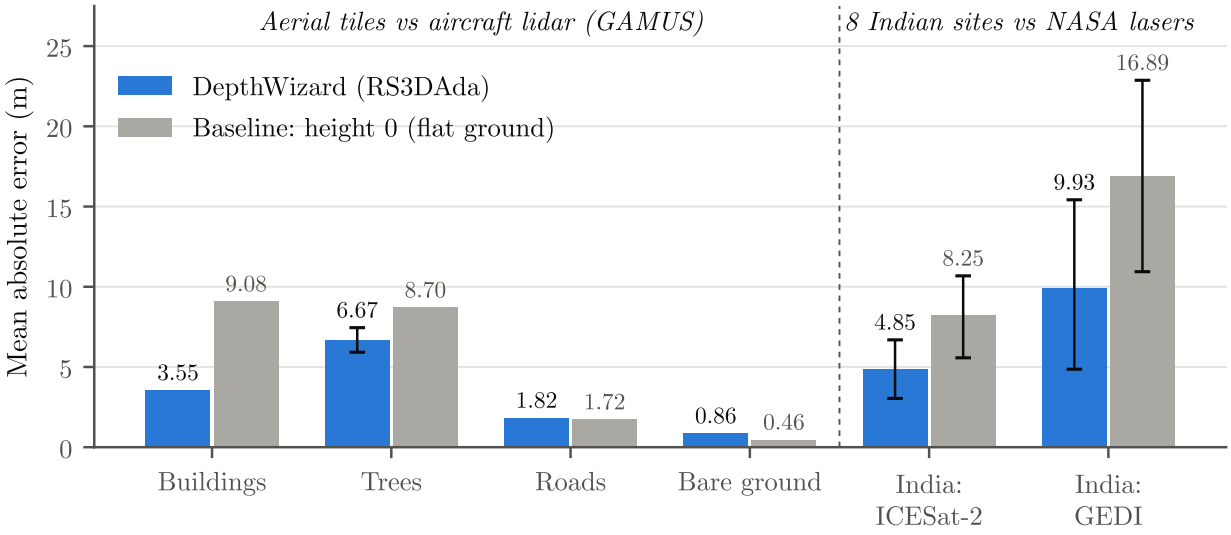


Figure 6: Average height error by type of surface. Left: aerial tiles against aircraft lidar. Right: Indian sites against NASA lasers, with 95% confidence ranges.

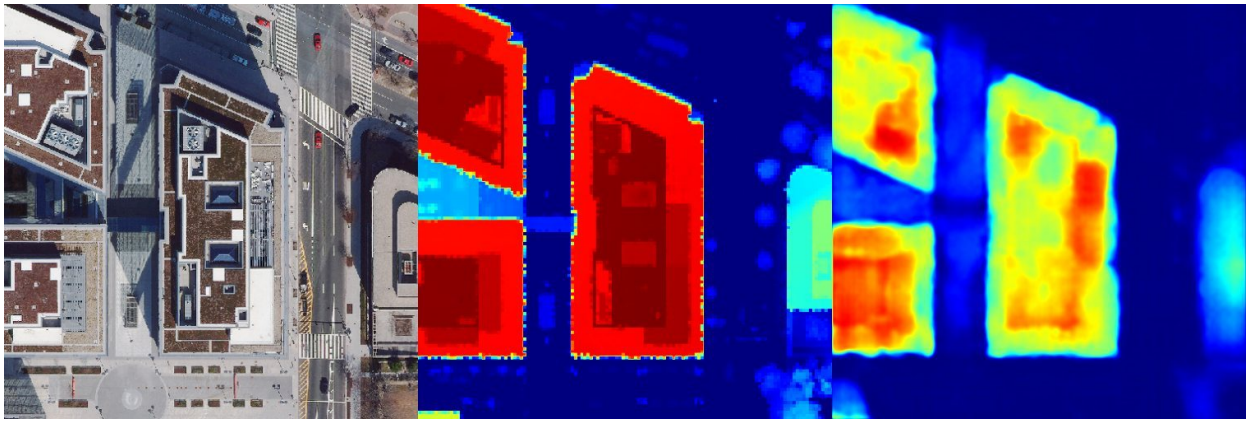


Figure 7: One test tile: the aerial photo (left), the true heights from aircraft lidar (middle) and DepthWizard's heights from the photo alone (right). Red is tall, blue is low.

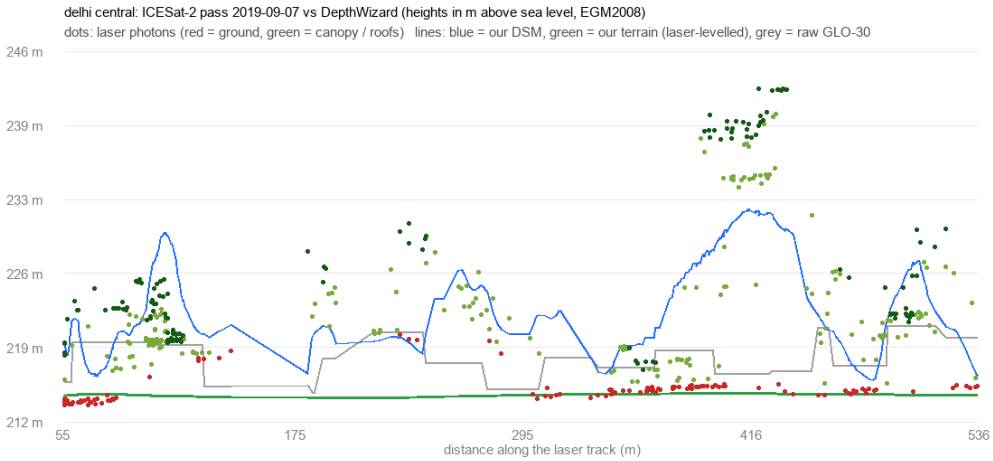


Figure 8: A slice through Delhi along a NASA laser track. Red dots: laser hits on the ground; green dots: hits on trees and roofs; blue line: our heights; green line: our ground level; grey line: the free GLO-30 map.

Table 9: Height models on the same 750 tiles: average error in metres (lower is better), cost on one GPU. "As predicted": heights used directly; "aligned": after the best scale and offset per tile.

	As predicted			Aligned		
Model	GAMUS	Atlanta	B. Aires	GAMUS	Atlanta	B. Aires
Flat ground (height 0)	5.65	8.98	3.86	–	–	–
RS3DAda	**3.90**	**5.91**	**1.86**	**2.95**	**4.94**	**1.79**
DepthWizard-Mamba (ours)	7.20	8.70	3.39	3.97	7.10	2.54
Depth Anything V2, relative	–	–	–	3.25	5.64	2.18
Depth Anything V2, metric	–	–	–	3.49	6.21	2.40

	Parameters	Memory	Speed
RS3DAda	366.5 M	705 MiB	105 tiles per minute
DepthWizard-Mamba (ours)	40.7 M	78 MiB	546 tiles per minute
Depth Anything V2, relative	335.3 M	1,532 MiB	118 tiles per minute
Depth Anything V2, metric	335.3 M	650 MiB	134 tiles per minute

on GAMUS, 2.79 m on Atlanta and 1.53 m on Buenos Aires. It beats the flat-ground guess on the two satellite sets (by 0.28 and 0.47 m) but not on the aerial one, where it overestimates low ground by about 3 m. All models underestimate the tallest objects: above 20 m, RS3DAda is 19.1 m too low on GAMUS and the student 19.5 m.

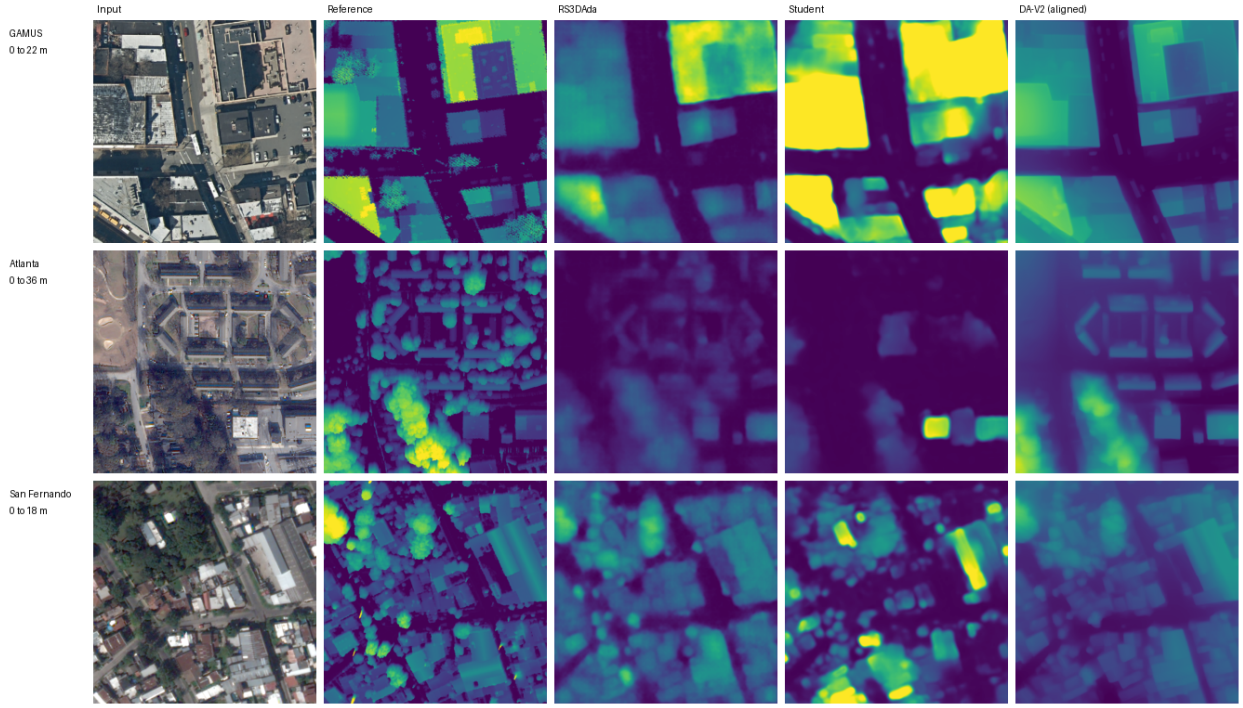


Figure 9: Typical tiles (the median tile for RS3DAda in each set): input, lidar reference, RS3DAda, our Mamba student and Depth Anything V2 (relative, aligned). Rows: GAMUS, Atlanta, and San Fernando from the Buenos Aires set. Colour from 0 (dark) to the value on the left (yellow). The student finds buildings but overstates them on GAMUS and blurs small objects.

8.3 Tall objects and error ranges

Low objects are about right, but tall ones come out far too low (Figure 10a): above 20 m, heights are 16.26 m too low on aerial tiles, 16.80 m and 15.25 m too low in the two satellite cities, and 18.31 m too low in India. This is the main weakness of the published model. The 90% error range of Eq. (5) held for 86.6% (Washington DC), 83.3% (New York) and 97.0% (Philadelphia) of building blocks in cities it was not set on, with a half-width of about 6 m, and for 71% of 96 Indian roofs. Figure 10b shows that it holds for low buildings but fails for tall ones, for the same reason; the app warns users about this.

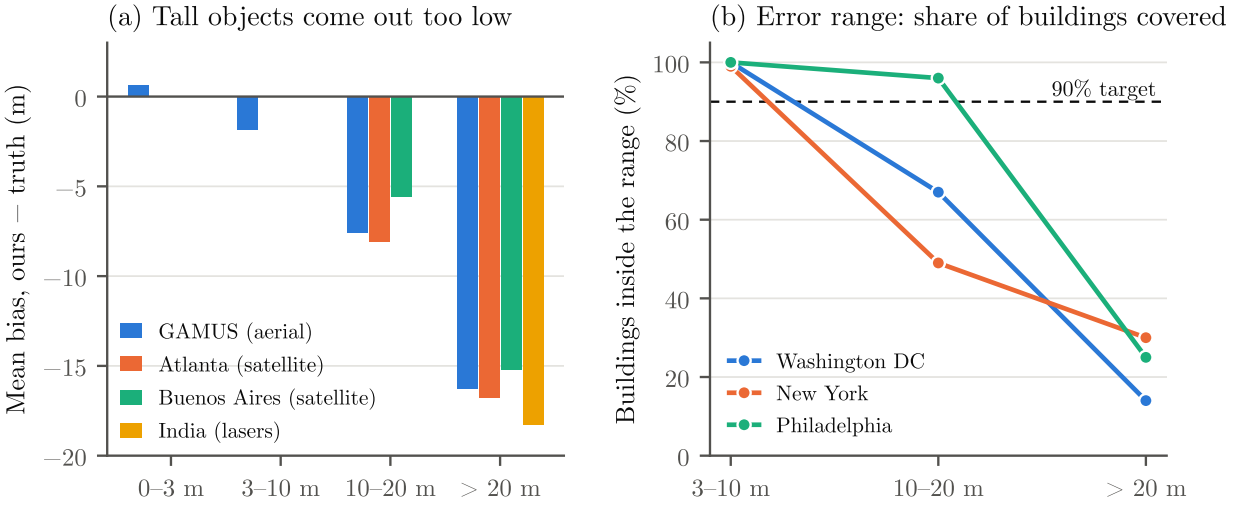


Figure 10: (a) Average bias by true object height on aerial, satellite and Indian tests. (b) Share of building blocks whose true height falls inside the 90% range, by height, in three cities not used to set the range.

8.4 Ground level and heights above sea level

Removing rooftops and trees from the free terrain map halves the ground-level error in Indian towns, from 5.28 m to 2.36 m, slightly better than FABDEM's 2.80 m (Figure 11a). On sparse land all three maps agree; in the hills FABDEM is better; and under forest every map is about 20 m off, ours the most. Levelling to ICESat-2 removes the average offset of the ground map, from +2.58 m to −0.27 m, but not its typical error (Table 10). For floods, which depend on small height differences over a wide area, this offset is what matters: with laser levelling the flood map agreed far better with the real flood (Figure 11b, Section 8.5).

Table 10: Ground level and heights above sea level at the Indian sites (error in m).

Comparison	Sites	Ours	Alternative
Ground vs held-out laser ground, current app	5	3.73 [1.44, 6.69]	3.86 (not levelled)
Average offset of the ground map	5	−0.27	+2.58 (not levelled)
Ground vs all laser ground, not levelled	8	8.63	9.31 GLO-30; 7.56 FABDEM
Surface vs all laser hits	8	9.14	8.06 GLO-30
Surface vs GEDI tree and roof tops	7	5.97	8.39 GLO-30

At individual laser spots our surface is not more accurate than the free 30 m surface map except on sparse land; what the photograph adds is detail at 0.5 m, which a 30 m map cannot have.

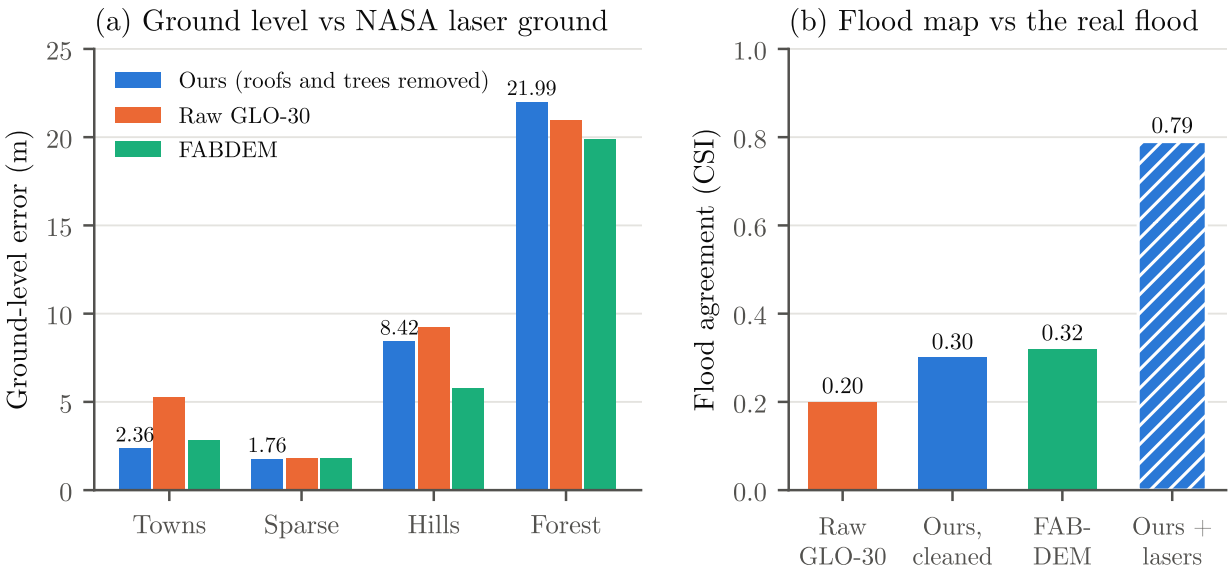


Figure 11: (a) Ground-level error against NASA laser ground at the Indian sites, by landscape (two sites each). (b) Agreement between predicted and real flood maps in Porto Alegre with four ground maps; hatched: our map levelled to ICESat-2.

8.5 Flood test: Porto Alegre, Brazil, May 2024

We flooded the pre-flood heights of four areas and compared them with the mapped extent of the real flood on 6 May 2024. With the free terrain map the agreement was 0.20; with our cleaned map 0.30; with FABDEM 0.32; and with our map levelled to NASA lasers 0.79 (Figures 11b and 12). Without levelling, over all seven areas, the agreement was 0.18, 0.47 and 0.48 for the free map, ours and FABDEM. This is a test of the method, not a forecast, and the areas are small.



Figure 12: Predicted versus real flood in Porto Alegre. Blue: both wet; orange: only our prediction wet; red: only the real flood wet. Imagery: Maxar Open Data (CC BY-NC 4.0).

8.6 A real Indian disaster: the Teesta flood, Sikkim, 4 October 2023

On 4 October 2023 the South Lhonak glacial lake burst and sent a flood down the Teesta valley. Using only free public data, we compared Sentinel-2 [24] images from 20 November 2022 and 15 November 2023, the first cloud-free pair after the monsoon, with a pre-flood photograph of the Lachen valley [21]. Two standard indices separate vegetation and water:

$$\mathrm{NDVI} = \frac{\rho_{\mathrm{NIR}} - \rho_{\mathrm{red}}}{\rho_{\mathrm{NIR}} + \rho_{\mathrm{red}}}, \qquad \mathrm{MNDWI} = \frac{\rho_{\mathrm{green}} - \rho_{\mathrm{SWIR}}}{\rho_{\mathrm{green}} + \rho_{\mathrm{SWIR}}}, \tag{9}$$

where ρ is the reflectance in each band. Ground counts as flood-damaged when it lies within 600 m of the river, has a slope under 25°, is cloud-free in both images, and either lost its vegetation (NDVI

fell by more than 0.25 to below 0.3) or turned into water (MNDWI above zero only after the event). Figure 13 and Table 11 give the result.

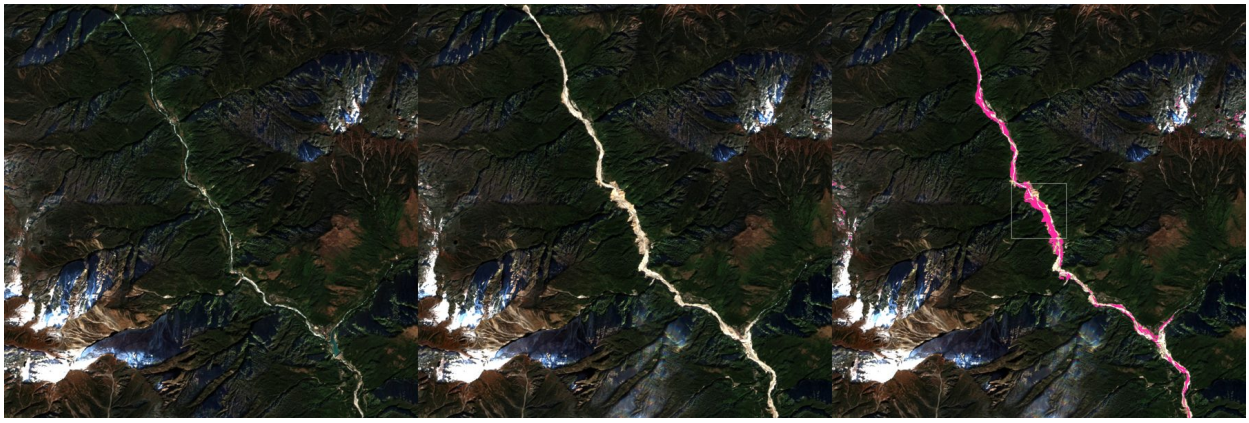


Figure 13: The Teesta valley before (left) and after (middle) the flood; flood-damaged ground in magenta (right). White box: the area loaded into DepthWizard.

Table 11: The Teesta flood, measured from Sentinel-2.

Measure	Before	After	Change
Lake open water	1.358 km^2	1.28 km^2	−5.7%
Lake water murkiness (NIR reflectance)	0.046	0.067	×1.5
Damaged ground, 12 km of valley	–	1.281 km^2	of 52.85 km^2 checked
Damaged ground, our area	–	0.328 km^2	13% of the area

The lake shrank only slightly but became much muddier: the outburst drained it downwards more than it changed its outline, so its area alone understates how much water escaped. We then ran DepthWizard on the pre-flood Lachen scene (3,200 × 3,200 pixels at 0.5 m, 559 m of relief, 64 buildings found) and loaded the damage map into the Observed-flood tool (Figure 5f). The flood level that best matches the damage map gives a critical success index of 0.49: the scenario covers 86% of the damaged ground, while 47% of the ground it floods was not damaged. The damaged area reached 52 buildings, home to about 673 people by the app's floor-area estimate. A single water level is a crude model of a fast flood in a steep valley, which explains much of the over-flooding, and the damage map shows what the flood left behind a month later rather than its peak; its 10 m pixels suit areas, not single houses.

8.7 What we tried, and what it changed

Table 12 records changes that were tested on the same data, including those that did not help and were therefore not kept.

8.8 Software tests and speed

Automated tests click through every tool on scenes whose true answers are known: 38 checks in the main interface and 36 in the older viewer, all passing. One full scene runs from upload to 3D in 42 s on an 8 GB Apple M3 laptop.

Table 12: Tested changes and their effect.

Change	Effect on the same test	Decision
Four flipped readings, not one	Error −0.064 m [−0.101, −0.035]; better on 114 of 150 tiles	Kept
Roof-point rule for lasers	Ground error 4.30 → 2.63 m (Porto Alegre), 0.76 → 0.59 m (Bengaluru); one area 2.15 → 2.38 m	Kept
Refuse single-track levelling	Stopped a wrong 46.59 m shift in Silent Valley	Kept
Height recalibration curve	Better in two cities, worse in the third (1.86 → 2.87 m)	Not kept
Resampling the input image	3.08 m resampled vs 3.15 m native; not significant	Not kept
Denser levelling with GEDI	4.18–4.24 m vs 4.02 m	Not kept
Error range per pixel	Held 81.4–96.1% of the time; missed the target	Per building

9. Discussion

meaning, limits, next steps

9.1 What the results mean

From one photograph, DepthWizard gives building heights good to a few metres, a ground map that is far better than the free map in towns, and a flood picture that matches reality well once the ground is levelled with lasers. It is most reliable for low and medium buildings in towns, and least reliable for tall buildings and forests. Because every number carries a measured error and a baseline, a user can see in advance where to trust it.

9.2 Limitations

Table 13: Known limits and how DepthWizard deals with them today.

Limit	Effect	What we do
Objects over 20 m are 15–18 m too low	Tall refuges look shorter	Warning on every result
Trees at 18–60% of true height	Forest heights unreliable	Canopy map or GEDI correction
Ground under forest about 20 m off	Floods in forest unreliable	Flagged in the app
Mamba student less accurate so far	7.20 vs 3.90 m on GAMUS	App keeps RS3DAda
Mamba model needs an NVIDIA card	Not in the laptop version	GPU servers only
Only two Indian sites per landscape	Wide confidence ranges	Ranges always reported
India's Cartosat images need a login	Not yet tested	Request to NRSC drafted

9.3 Responsible use and licences

All disaster outputs are scenarios meant to support planning, not forecasts, and are labelled so in the app. Population figures are estimated from building floor area, not from personal data. The RS3DAda weights were trained on non-commercial data, and FABDEM and the Maxar demonstration images are also non-commercial, so DepthWizard is suitable for research and government pilots; commercial use would need new weights or permissions.

9.4 Next steps

1. **Improve the Mamba model:** train longer, use the true-height term of Eq. (1), and adapt it to real images with RS3DAda's full recipe, until it matches RS3DAda's accuracy while keeping its five-fold speed.
2. **Improve trees and tall buildings:** measure the canopy and GEDI corrections on Indian forests, and use shadow lengths to correct tall buildings.
3. **Extend the Teesta study:** replace the single water level with the flowing-water model of Eq. (6), released from the lake, and score it against the damage map.
4. **Pilot** with one State Disaster Management Authority through a monsoon, validate on Cartosat imagery, and hand the code and results to NRSC and ISRO.

10. Conclusion

From one ordinary satellite photograph, combined with free terrain data and NASA's lasers, DepthWizard produces a 3D height map that disaster teams can use offline and check for themselves. Our main novelty is a Mamba-based height model that gives the same outputs as the published model while being nine times smaller and five times faster; its first version is not yet as accurate, so it is a promising start rather than a replacement. With the published model, DepthWizard beats simple guesses on every height test, halves the ground-level error in Indian towns, raises flood-map agreement from 0.30 to 0.79 with laser levelling, outperforms Depth Anything V2 on the same tiles, and maps a real Indian disaster from public data. It does not yet replace a ground survey: very tall buildings come out too low and forests remain hard. Because every result comes with its error, users can see where to trust it.

Author Contributions

Himanshu Patel: project set-up and processing pipeline; the Mamba-based model and distillation code; terrain cleaning, ICESat-2 levelling and the roof-point rule; evaluation protocol and claims register; user interface, landing page and the eighteen tools; Teesta case study; canopy-map and GEDI correction. **Shlok Vaidya:** in-app height validation and control-point calibration; standalone installer; helipad finder and route search; training of the Mamba student; the comparison of RS3DAda, the Mamba student and Depth Anything V2; application screenshots; benchmark reports and the October project report.

Acknowledgements

We thank our mentors at IIT Ropar. Imagery: Maxar Open Data Program and ESA Copernicus Sentinel-2. Ground heights: Copernicus GLO-30. Laser data: NASA ICESat-2 and GEDI. Tree heights: Meta and the World Resources Institute.

Data and code availability

The code, test scripts and claims register are in the project repository, `https://github.com/hima1323/terravista-depthwizard`. All test data are public and are cited in Table 7; each number in this paper is linked in the claims register to the file that produced it.

References

[1] A. Gu and T. Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv:2312.00752*, 2023.

[2] A. Hatamizadeh and J. Kautz. MambaVision: A hybrid Mamba-Transformer vision backbone. In *Proc. CVPR*, 2025. arXiv:2407.08083.

[3] J. Song, H. Chen, W. Xuan, J. Xia and N. Yokoya. SynRS3D: A synthetic dataset for global 3D semantic understanding from monocular remote sensing imagery. In *NeurIPS Datasets and Benchmarks*, 2024. arXiv:2406.18151.

[4] M. Oquab *et al.* DINOv2: Learning robust visual features without supervision. *arXiv:2304.07193*, 2023.

[5] G. Hinton, O. Vinyals and J. Dean. Distilling the knowledge in a neural network. *arXiv:1503.02531*, 2015.

[6] R. Ranftl, A. Bochkovskiy and V. Koltun. Vision transformers for dense prediction. In *Proc. ICCV*, 2021.

[7] European Space Agency. *Copernicus DEM GLO-30*, 2021. © DLR e.V. 2010–2014 and © Airbus Defence and Space GmbH 2014–2018.

[8] L. Hawker *et al.* A 30 m global map of elevation with forests and buildings removed. *Environmental Research Letters*, 17, 2022.

[9] T. A. Neumann *et al.* The Ice, Cloud, and Land Elevation Satellite-2 mission: A global geolocated photon product derived from the ATLAS instrument. *Remote Sensing of Environment*, 233, 2019.

[10] A. Neuenschwander and K. Pitts. The ATL08 land and vegetation product for the ICESat-2 mission. *Remote Sensing of Environment*, 221, 2019.

[11] R. Dubayah *et al.* The Global Ecosystem Dynamics Investigation: High-resolution laser ranging of the Earth's forests and topography. *Science of Remote Sensing*, 1, 2020.

[12] J. Tolan *et al.* Very high resolution canopy height maps from RGB imagery using self-supervised vision transformer and convolutional decoder trained on aerial lidar. *Remote Sensing of Environment*, 300, 2024.

[13] P. D. Bates, M. S. Horritt and T. J. Fewtrell. A simple inertial formulation of the shallow water equations for efficient two-dimensional flood inundation modelling. *Journal of Hydrology*, 387, 2010.

[14] N. Otsu. A threshold selection method from gray-level histograms. *IEEE Transactions on Systems, Man, and Cybernetics*, 9(1), 1979.

[15] Bureau of Indian Standards. *IS 14496 (Part 2): 1998, Preparation of landslide hazard zonation maps in mountainous terrains: Guidelines.*

[16] J. Lei, M. G'Sell, A. Rinaldo, R. J. Tibshirani and L. Wasserman. Distribution-free predictive inference for regression. *Journal of the American Statistical Association*, 113, 2018.

[17] E. W. Dijkstra. A note on two problems in connexion with graphs. *Numerische Mathematik*, 1, 1959.

[18] three.js authors. three.js: JavaScript 3D library. `https://threejs.org`.

[19] Z. Xiong *et al.* GAMUS: A geometry-aware multi-modal semantic segmentation benchmark for remote sensing data. *arXiv:2305.14914*, 2023.

[20] G. Christie *et al.* Single view geocentric pose in the wild. In *CVPR Workshops (EarthVision)*, 2021.

[21] Maxar Technologies. Open Data Program: India Floods October 2023; Brazil Floods 2024. CC BY-NC 4.0.

[22] L. Yang, B. Kang, Z. Huang, Z. Zhao, X. Xu, J. Feng and H. Zhao. Depth Anything V2. In *NeurIPS*, 2024. arXiv:2406.09414.

[23] J. Song, H. Chen and N. Yokoya. Enhancing monocular height estimation via sparse LiDAR-guided correction. *arXiv:2505.06905*, 2025.

[24] M. Drusch *et al.* Sentinel-2: ESA's optical high-resolution mission for GMES operational services. *Remote Sensing of Environment*, 120, 2012.

A. Detailed Results

Table A1: Further results on the 150 aerial lidar tiles (GAMUS).

Measure	Value [95% confidence range]
RMSE	5.58 m [4.82, 6.40]
Bias	−2.61 m [−3.41, −1.87]
Correlation with lidar	0.61 [0.57, 0.65]
Error by city	DC 5.16 [3.77, 6.75]; New York 4.69 [3.49, 5.99]; Philadelphia 1.86 [1.44, 2.39]
Objects taller than 3 m	6.65 m [5.90, 7.44]; baseline 11.10 m
Points within ±2 m	61%; baseline 54%
Trees, predicted / true height	DC 0.20; New York 0.18; Philadelphia 0.60
Disagreement of the four readings vs error	Rank correlation 0.44 overall; −0.03 above 3 m

Table A2: Indian sites by landscape: mean of two sites each, error in m.

Landscape	Ground: ours / GLO-30 / FABDEM	Surface: ours / GLO-30	Height: error, bias
Town	2.36 / 5.28 / 2.80	5.47 / 4.98	4.49, −1.19
Sparse	1.76 / 1.80 / 1.82	2.10 / 2.29	1.56, +0.84
Hills	8.42 / 9.20 / 5.74	8.57 / 7.75	8.25, −5.12
Forest	21.99 / 20.97 / 19.87	20.40 / 17.21	5.10, −3.50

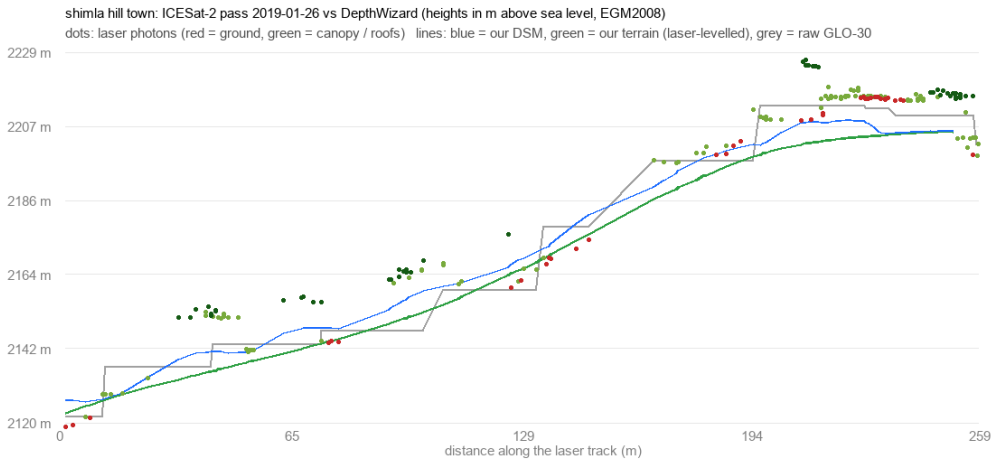


Figure A1: A slice through Shimla along a NASA laser track. Red dots: laser hits on the ground; green dots: hits on trees and roofs; blue line: our heights; green line: our ground level; grey line: the free GLO-30 map.